




# FLEXIBLE ALUMINUM FOIL DUCTING

SKU 1001 223 234, 591 752, 591 966

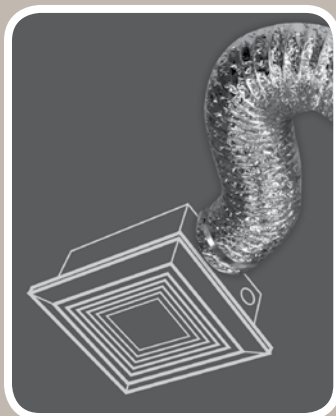

- Ideal for use in bathroom fan venting and other general purpose exhaust applications
- Made from 3 ply aluminum foil laminate
- Maximum operating temperature of 250°F
- UL / cUL 181 listed and marked as a class 1 air connector
- Tear and puncture resistant
- Will not support combustion

### UL 181 Listed And Marked

Product Code	UPC Code 060672	SKU	Size	Packaging	Pack Qty.	Pack Wt. (lbs)	Pack Cube (cu. ft.)
AF325ULPHD	310463	1001 223 234	3" x 25'	Polybag / Cut Case	4	8	0.92
AF425ULPHD	310029	591 752	4" x 25'	Polybag / Cut Case	8	17	2.06
AF625ULPHD	310036	591 966	6" x 25'	Polybag / Cut Case	6	10	2.37

#### Code Compliance:

Dundas Jafine recommends that you check with the local code body, having jurisdiction in your area, to determine applicable codes. UL 181, NFPA 90A & 90B, BOCA, ICBO, SBCC, HUD/FHA MIN. Property STD.

**Static Pressure - Positive:** 10 in. WC

**Static Pressure - Negative:** 1/2 in. WC

**Maximum Velocity:** 5500 FPM

**Temperature Range:** -20°F to 250°F

**Bending Radius:** 1 x diameter

