

### URINAL K-5016-ER

#### Features


- Vitreous china
- Siphon jet
- 3/4" rear spud
- Includes inlet and outlet spuds and hangers
- Includes anti-backsplash wall
- 14-1/2" (368 mm) extended rim
- 0.5 gpf (1.9 lpf)
- WaterSense® compliant when used with WaterSense flushometer



#### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- ASME A112.19.2/CSA B45.1
- EPA WaterSense®

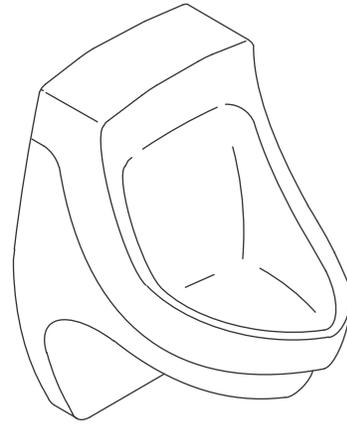

#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories

- CP: Polished Chrome

#### Specified Model

Model	Description	Colors/Finishes	
K-5016-ER	3/4" rear spud urinal	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Recommended Accessories			
K-10961	Touchless DC siphon jet urinal flushometer – 1.0 gpf (3.8 lpf)	<input type="checkbox"/> CP	
K-13521	Manual siphon jet urinal flushometer – 1.0 gpf (3.8 lpf)	<input type="checkbox"/> CP	

#### Product Specification

The siphon jet urinal shall be made of vitreous china with a 3/4" rear spud. Urinal shall include inlet and outlet spuds and hangers. Urinal shall include anti-backsplash wall. Urinal shall use 0.5 gpf (1.9 lpf). Urinal shall be WaterSense compliant when used with WaterSense flushometer. Urinal shall have a 14-1/2" (368 mm) extended rim. Urinal shall be Kohler Model K-5016-ER-\_\_\_\_\_.

# DEXTER™

## Technical Information

Fixture:	
Configuration	3/4" rear spud
Spud inlet size	3/4"
Water per flush	0.5 gpf (1.9 lpf)
Included components:	
3/4" inlet spud	18376
2" outlet spud	18766
Hanger (2 required)	64512

## Installation Notes


Install this product according to the installation guide.

Refer to manufacturer's instructions and local codes for flushometer requirements.

Will comply with **ADA** when installed per Section 605 Urinals of the Act.

\*Urinal complies with ADA requirement when installed per Section 605 of the Act.

\*\*Recommended outlet height for ADA compliance.

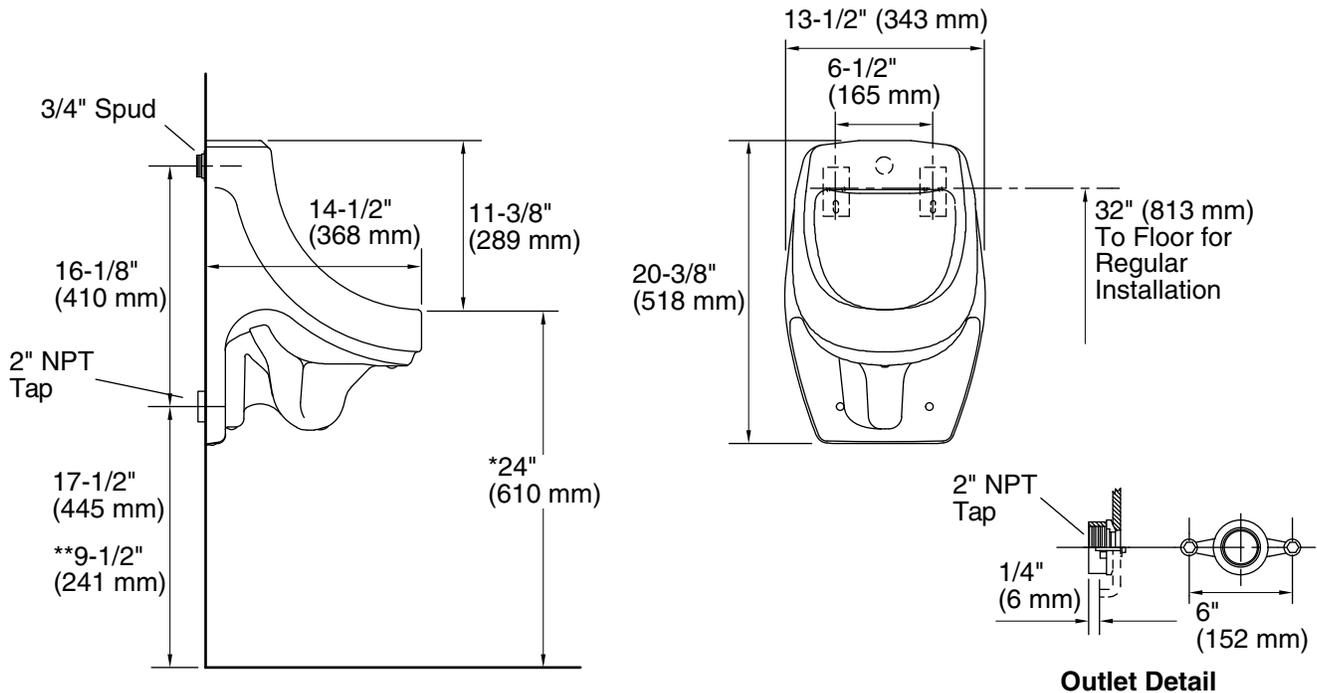

## Product Diagram