


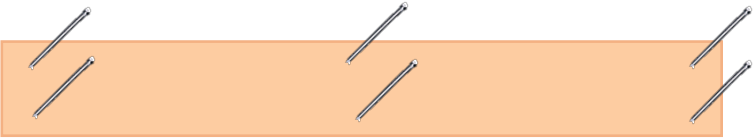
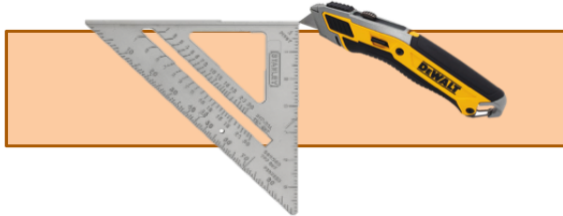


INSTALLATION INSTRUCTION

<p>1. Select orientation: horizontal, vertical or diagonal.</p>	
<p>2. Using a level, draw a line on the wall for the Starter Plank.</p>	
<p>3. Prepare the finishing nails: either install the enclosed nail strip into the nail gun for 1.25" # 18 gage brad nails, or chip nails from the strip for hummer installation.</p>	
<p>4. Apply a whole length or pre-cut starter plank to the line on the wall and afix it with the nails in each corner of the plank. Step at least 1 in. from each side or end of the plank to nail it. For long planks apply two more nails in the middle of the board.</p>	
<p>5. If you need to cut any planks, use any wood saw (table saw or hand saw) or cut the furrow in the wood with a utility knife on <u>both</u> sides of the plank and break it against the edge of the table.</p>	
<p>6. If you need to attach wall art or shelves on top of the wall planks, drill the holes and put hangers through the planks on your wall. Don't hang anything heavier than 0.5 lbs on the planks themselves!</p>	<p>7. Other installation options:</p> <ul style="list-style-type: none"> - Double sided sticky foam – we don't recommend using them alone (sooner or later planks may fall down) if you don't secure planks with nails. - Adhesive or liquid nails – recommended if you use a contractor for professional installation. The adhesive should be applied along the length of the planks with three thin strips (not as butter on brad distributed evenly (!)): 