

# MAXX COLD

Maxx Cold | The Legacy Companies  
 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401  
 www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model: \_\_\_\_\_

## REACH-IN FREEZERS

Model:  MCF-23FD  MCF-49FD  MCF-72FD

International Model:  
 Add -50 (220V/50Hz/1Ph)



Maxx Cold reach-in freezers are built to last. Temperature is digitally controlled and easily viewed from the exterior of the cabinet. Stainless steel construction ensures years of reliable service, maximum durability and is easy to clean. Maxx Cold units are designed to meet the requirements of the most discriminating customer.

### FEATURES

- Easy to grip recessed door handles
- Adjustable heavy duty wire shelves (3 per section/door)
- Four (4) or Six (6) 4" diameter casters standard
- Open door alert, beeps when door has been open for three minutes
- Locking doors
- Automatic interior lighting
- Available in 120V/60Hz, 220V/50Hz & 230V/60Hz

### TEMPERATURE

- Holding temperature: -10° to 10°F (-23° to 12°C)
- Utilizes environmentally friendly refrigerant R404A
- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior
- Large evaporator and condenser for quick cooling and greater efficiency
- Automatic defrost system

### CONSTRUCTION

- Durable, easy to clean stainless steel exterior and interior
- Cord set includes plug & 9.8' (3m) cord
- CFC-free Polyurethane insulated walls and doors

### REFRIGERANT

CFC & HCFC free R-404A

NEMA 5-15

NEMA L14-20R



MCF-23FD/49FD

MCF-72FD

### ELECTRIC

MCF-23FD/49FD: 120/60Hz/1 Ph (NEMA 5-15)

MCF-72FD: 220V/60Hz/1 Ph (NEMA L14-20R)

International 220V/50Hz & 230V/60Hz models available as options



Certified to  
ANSI-NSF 7



Certified to  
ANSI UL 471



### Maxx Cold WARRANTY (USA / CANADA)

Three (3) years parts and on-site labor

Five additional (5) years compressor (part only)

Administered by The Legacy Companies, 877.368.2797


24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.


The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

# REACH-IN FREEZERS


MCF-23FD

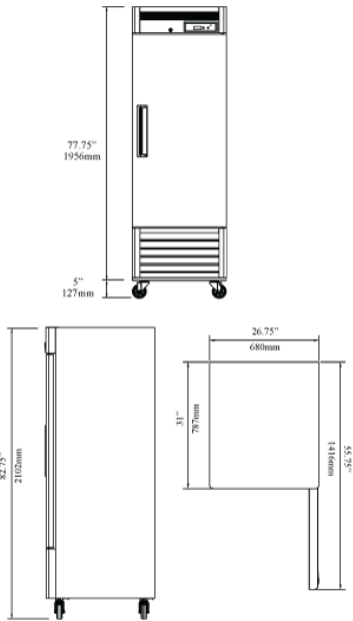

MCF-49FD

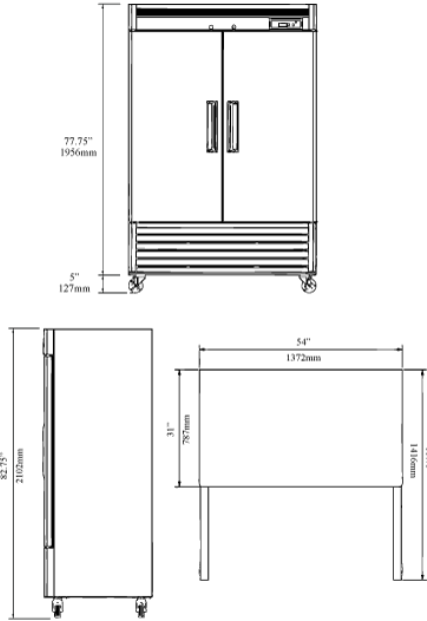

MCF-72FD

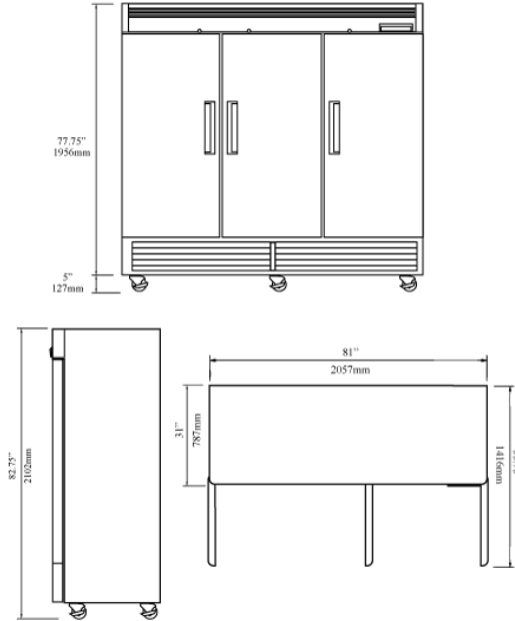

\*Shorter caster options are available to bring overall unit height as low as 32" to satisfy either ADA or low profile application needs

	Dimensions* in / mm	Nominal Capacity	Actual Usable Capacity	Temperature Range	Voltage	Watts	Unit Weight	Shelves
<b>MCF-23FD</b>	26.75 x 31 x 82.75 680 x 787 x 2102	23 Cu Ft 651 L	18.9 Cu Ft 535 L	-10 - 10° F -23° - 12° C	120V/60Hz/1	805	284 lb 129 kg	3
<b>MCF-49FD</b>	54 x 31 x 82.75 1370 x 787 x 2102	49 Cu Ft 1387 L	42.8 Cu Ft 1212 L	-10 - 10° F -23° - 12° C	120V/60Hz/1	1254	403 lb 183 kg	6
<b>MCF-72FD</b>	81 x 31 x 82.75 2057 x 787 x 2102	72 Cu Ft 2039 L	66.7 Cu Ft 1889 L	-10 - 10° F -23° - 12° C	220V/60Hz/1	1060	650 lb 295 kg	9

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.  
 While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.  
 By using the information provided, the user assumes all risks in connection with such use.