

Magnetic Drive Pumps

PES-Series

Designed to operate continuously with minimal energy consumption, magnetic-drive pumps offer a corrosion-resistant body specifically for submersible use. Easy to install and maintain, magnetic-drive pumps are ideal for a variety of applications.

- Built-in adjustable flow control valve
- Ceramic shaft for longer life
- Great for table top features



PES-700-PW






PES-80-PW



PES-40-PW

| PES-SERIES | Item Number | Amps | Watts | Cord (ft) | Submerged Use | Discharge Barb | Gallons Per Hour (GPH) at height | | | | Shut Off (ft) |
|-------------|-------------|------|-------|-----------|---------------|----------------|----------------------------------|-----|-----|-----|---------------|
| | | | | | | | 1' | 3' | 5' | 10' | |
| PES-40-PW | 566713 | 0.03 | 2.5 | 6' | ✓ | 1/2", 3/8" | 45 | - | - | - | 2.1 |
| PES-80-PW | 566714 | 0.14 | 8 | 6' | ✓ | 1/2", 3/8" | 77 | 20 | - | - | 3.5 |
| PES-130-PW | 566716 | 0.23 | 11 | 6' | ✓ | 1/2", 5/8" | 130 | 85 | - | - | 5.5 |
| PES-290-PW | 566717 | 0.4 | 23 | 6' | ✓ | 1/2", 5/8" | 300 | 180 | 115 | - | 7.25 |
| PES-380-PW | 566718 | 0.64 | 33 | 15' | ✓ | 1/2", 5/8" | 350 | 285 | 180 | - | 7 |
| PES-700-PW | 566720 | 0.75 | 57 | 15' | ✓ | 3/4" | 725 | 560 | 400 | - | 8.25 |
| PES-800-PW | 566721 | 0.95 | 114 | 15' | ✓ | 3/4" | 875 | 750 | 625 | 175 | 11.75 |
| PES-1000-PW | 566722 | 1.4 | 160 | 15' | ✓ | 1" | 1150 | 965 | 775 | 200 | 11.75 |

| DIMENSIONS (INCHES) | A | B | C |
|---------------------|-----|------|-----|
| PES-40-PW | 1.9 | 1.16 | 1.7 |
| PES-80-PW | 2.8 | 2.3 | 1.9 |
| PES-130-PW | 3.5 | 3.2 | 2.8 |
| PES-290-PW | 3.7 | 3.6 | 2.7 |
| PES-380-PW | 4.2 | 3.6 | 2.7 |
| PES-700-PW | 5.3 | 4 | 4.3 |
| PES-800-PW | 5.3 | 4 | 4.3 |
| PES-1000-PW | 5.7 | 4.4 | 4.3 |

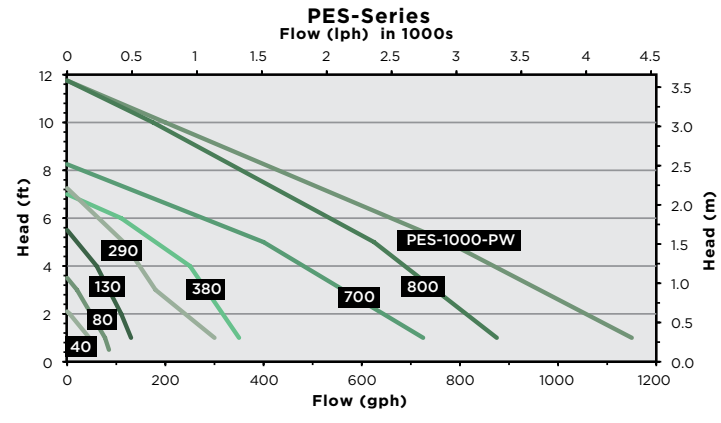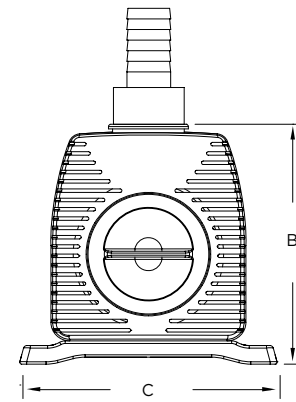

Little GIANT®
Outdoor Living