

Submitted Model No.: _____

Specific Features: _____



IN2ITION®

- 2-In-1 Shower
- 2.5 GPM Max @ 80 PSI

STANDARD SPECIFICATIONS:

- Integrated handshower docks securely into showerhead when not in use.
- Multiple handshower spray settings and pause feature.
- 60" - 82" stainless steel stretchable hose.
- 72" plated ribbon hose.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



COMPLIES WITH:

- ASME A12.18.1/CSA B125.1 ◆


- ◆ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A12.18.3 and ASME A12.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

<p>58464-PK Showerhead</p>	<p>58466▲ Showerhead</p>
<p>58467▲ Showerhead</p>	<p>58468▲ Showerhead</p>
<p>58469-▲-PK Showerhead</p>	

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-B-58464-PK Rev. B

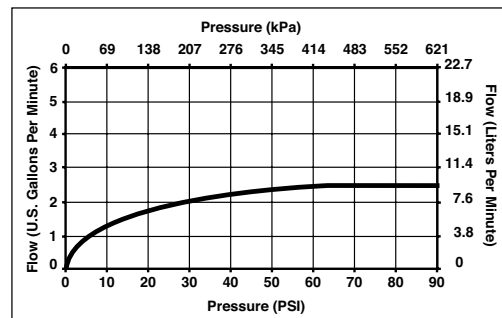

55 E. 111th Street, Indianapolis, Indiana 46280
 350 South Edgeware Road, St. Thomas, ON N5P 4L1
 © 2012 Masco Corporation of Indiana