

EPOXYSTUK X90



2 PART EPOXY MORTAR




For installation and grouting of ceramic tiles
with joint widths between 1 and 15 mm
Available in 4 colors - matt finish.



Fields of application

Suitable for acid-resistant installation and grouting of floor and wall tiles and mosaic in interiors and exteriors. Suitable for applications where the surfaces are exposed to aggressive chemical substances (see chemical resistance table) such as dairies, abattoirs, pubs, food factories in general. It is also recommended for grouting swimming pools and tanks, containing thermal or brackish water.

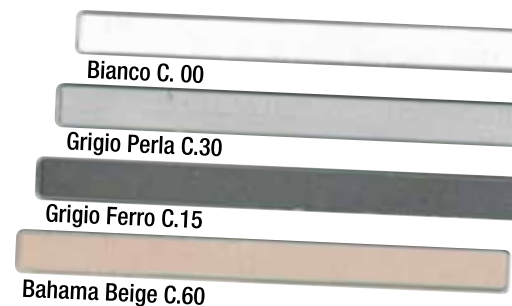

LITOKOL[®]
HI-PERFORMANCE BUILDING PRODUCTS

Made In Italy



EXCLUSIVE DISTRIBUTOR FOR USA
Tile Doctor
www.TileDoctor.com
877-TileDoc (845-3362)



No more stains and dirt with Epoxygrout X90 waterproof grout

The joints are always the critical point in terms of cleanliness of a tiled surface. Epoxygrout X90 is completely waterproof and makes the grouting surface stain-proof and easy to wash with normal detergents on the market.

The benefits of easy-to-clean grouting that doesn't absorb liquids or stains

Absorbent cement grouting is a critical obstacle in cleanliness of tiled surfaces. It is therefore possible to deteriorate for the following reasons:

- accumulation of dirt and other contaminants that leads to unclean and possibly unsafe surfaces;
- discolouration and chromatic variations, efflorescence.

These processes of degradation increase in the presence of moisture and steam such as in bathrooms and kitchens.

Unlike cement grout that requires sealing and maintenance Epoxygrout X90 does not absorb liquids and dirt and can therefore be easily washed.

It additionally prevents the proliferation of unwanted contaminants ensuring the best possible and most hygienic grout surface.



Grouting in contact with aggressive or chemical substances

- dairies
- oil mills
- abattoirs
- breweries and wineries
- the food industry in general
- tanks containing thermal or brackish water
- tanks for fish breeding



Easy to clean even for applications on very rough R12 tiles

Thanks to the experience developed over the years in the epoxy adhesive and grouts, Litokol has developed Epoxystuck X90 formula and achieved an easy to apply and easy to clean grout by simply wiping with a sponge, even with the roughest non-slip R12 tiles.



Beauty and strength in every residential situation

- 4 colors matt finish
- For interior and exterior wall and floor ceramic and mosaic tile installation and grouting;
- underfloor heating;
- flooring and wall tiles for bathrooms and showers;
- countertops;
- terraces and balconies.

Grouting that is resistant to the most extreme industrial applications

Industrial floors subject to high stresses such as the trafficking of trolleys, forklifts and pallet trucks.

For flooring subject to a high level of public and commercial use

Flooring intended for significant use such as shopping centres, airports, stations, sports facilities, offices and shops, bars and public buildings.



Safer for the user due to its non-corrosive nature

Epoxystuck X90 is safer for the user and safeguards the environment: the same safety labelling as a normal cementitious product. Part B of Epoxystuck X90 (catalyst) is non corrosive as is commonly the case in other products on the market.

Safe for housing as it has very low VOC emissions

Many products and materials in domestic dwellings contain VOCs (volatile organic compounds) which may be released over time. Epoxystuck X90 has **very low emissions of volatile organic compounds** - Class A + according to French Regulations.