



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Various finishes identified by suffix
- Handshower with Magnetix™ docking
- Metal shower ball
- 59" double interlock (metal) spiral hose
- Assembled with two check valves for backflow prevention
- Adjustable bracket

OPERATION

- Six function
- Wall bracket rotates to adjust angle of handshower

FLOW


- Designed to deliver 1.75 gpm (6.7 L/min) max. at 80 psi

STANDARDS

- Designed and manufactured to comply with the applicable requirements of WaterSense®, ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein


WARRANTY

- Lifetime limited warranty against material or manufacturing defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

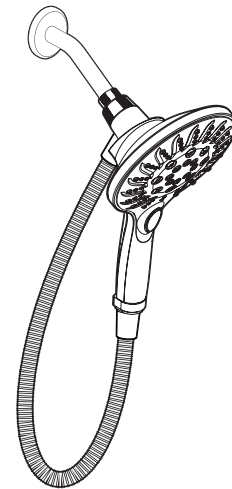

**Attract™
Handshower
with Bracket & Hose**

Models: 3662EP series

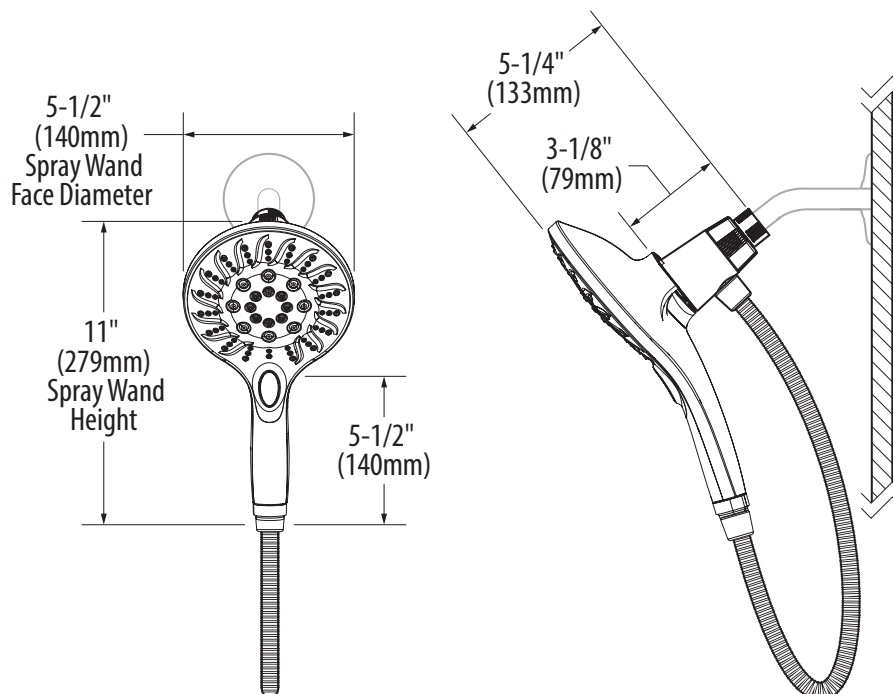

CRITICAL DIMENSIONS

(DO NOT SCALE)