

Installation Instructions for


Hy-dit®


Toilet Plunger Storage

English

Patent # 7,156,476 B2

Manufactured by:

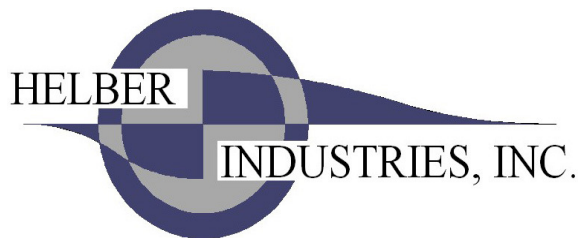

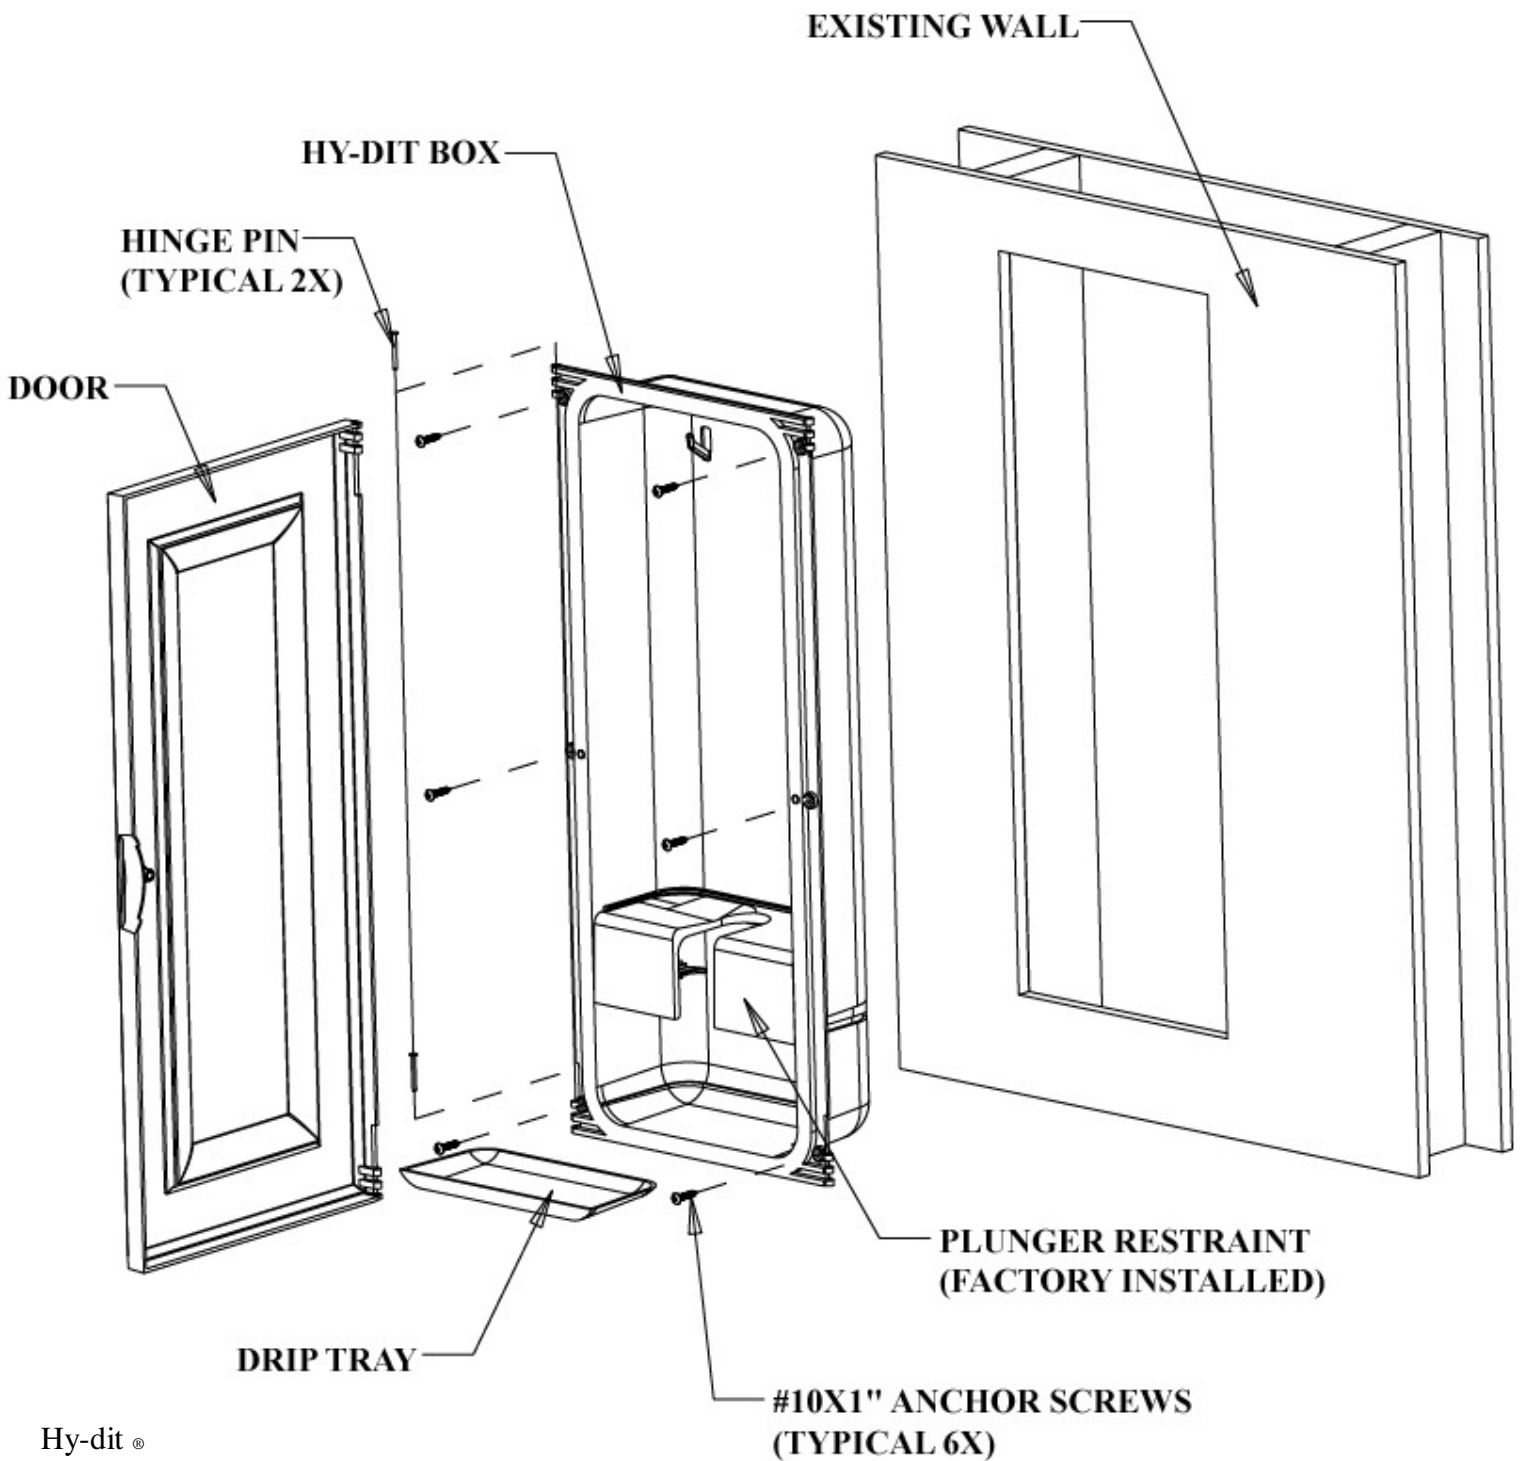

Hy-dit[®]
Complete Assembly Drawing

Figure 1

List of parts:

- 1 – Hy-dit[®] box
- 1 – Door
- 1 – Drip tray
- 2 – Hinge pins
- 6 – Plastic anchors 1”
- 6 – Anchor screws #10 x 1”
- 1 Toiler plunger w/ handle
- 1 Toilet brush
- 1 Pattern for cutting drywall

Tools needed for installation:

- Phillips screwdriver
- Drywall saw (preferred) or utility knife
- Level
- 13/64” drill bit
- Drill
- Hammer
- Small nail

Step 1 Find Installation Location between Studs:

Once a desired location has been chosen, the next step is to make sure there is no electric, plumbing or heat ducts in your way.

- Electric: Make sure there are no electric outlets in the area that has been chosen. Check the opposite side of the wall as well; this may be in an adjacent room.
- Plumbing: The plumbing is usually confined to the space behind a toilet or behind the tub/shower faucet.
- Heating ducts: They are usually located in the floors out of the way, but visually check the walls and adjacent rooms for registers.

Once you are fairly certain there is no electric, plumbing or heating ducts in your way find a location between studs.

There are many different methods to finding the area between studs:

1. Using an Electronic Stud Finder (easiest)
2. Knocking on the drywall (sound differences)
3. Hammer and a small nail

Only method three will be explained (hammer and a small nail). Level your pattern in the chosen area and then tape it to the wall (see fig.1). Start in the middle of the pattern and drive a small nail through the drywall in a horizontal line every $\frac{1}{2}$ " or until you reach both edges of the pattern. Stop if you hit a stud (see fig. 1). If no stud was hit move to step 2. If a stud was hit move your pattern cut edge to the last previous hole where a stud was not hit (see fig. 2).

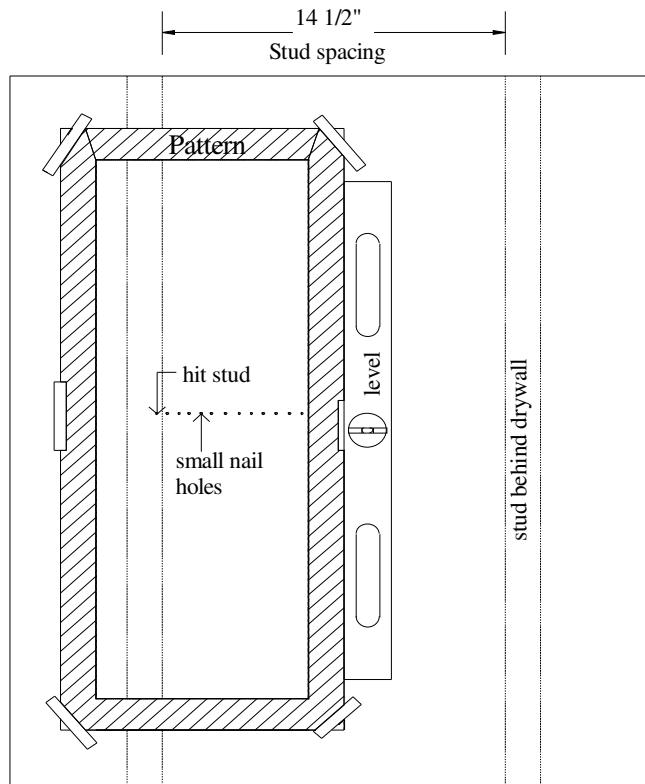


Figure 2

Step 2 Trace Pattern & Cut Out Opening

Once the pattern has been moved to the last hole where a stud was not hit and leveled continue making small nail holes to the other edge of pattern (see fig. 2). If no stud is hit trace the pattern on the wall and continue. If a stud or any other obstacle was hit a new location will be necessary. Patch small holes and restart at step 1. Once the pattern has been traced on the wall use a drywall saw (preferred) or a utility knife to cut out the opening.

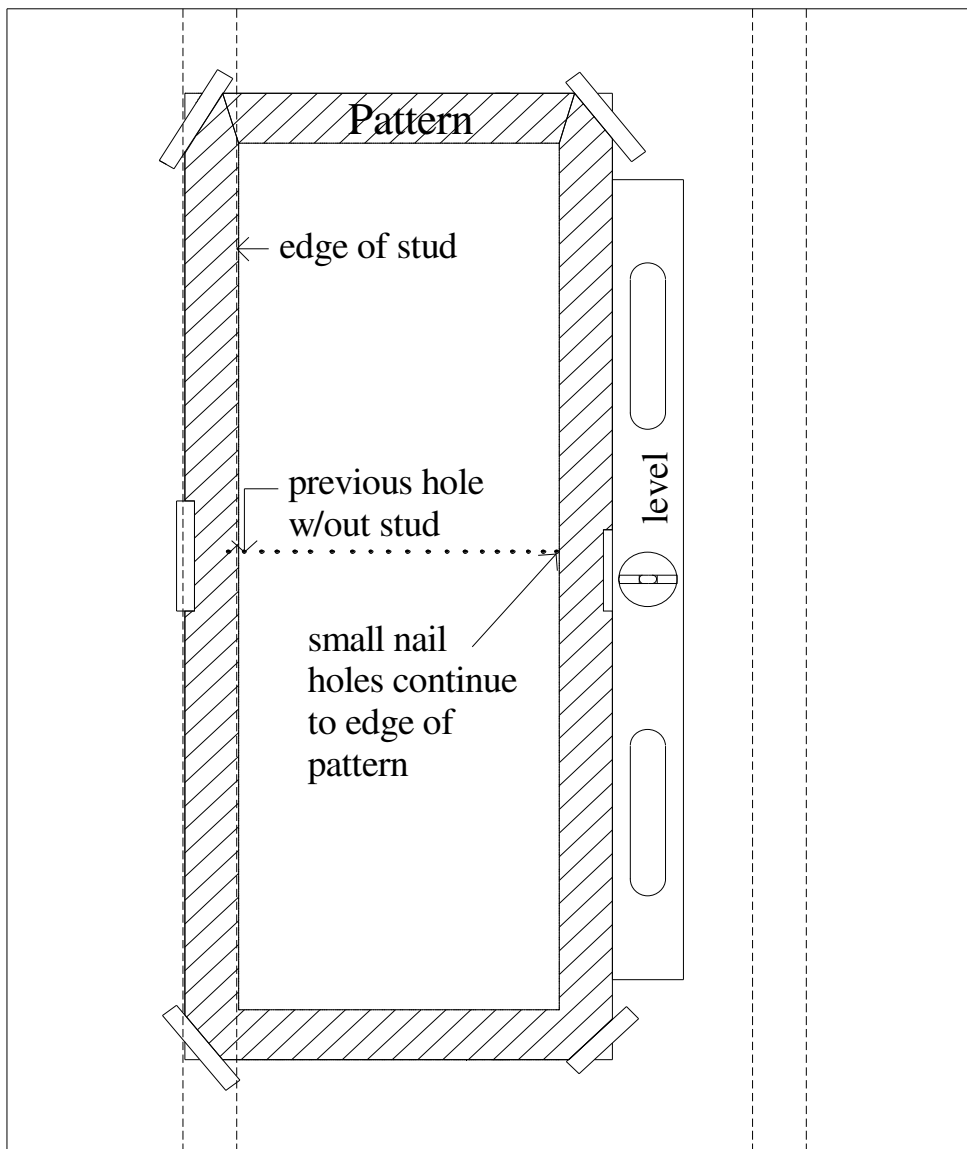


Figure 3

Step 3 Installation of Box

Install and level box in the opening. Mark the centers of the six mounting screws (see fig 3). Remove box to drill out marked holes using a 13/64" drill bit. If holes are over a stud do not drill or use a plastic anchor. Install plastic anchors in drilled holes; tap lightly so the anchor head is flush with drywall. Reinstall box using the #10 x 1" screws, either into the plastic anchors or directly into the stud.

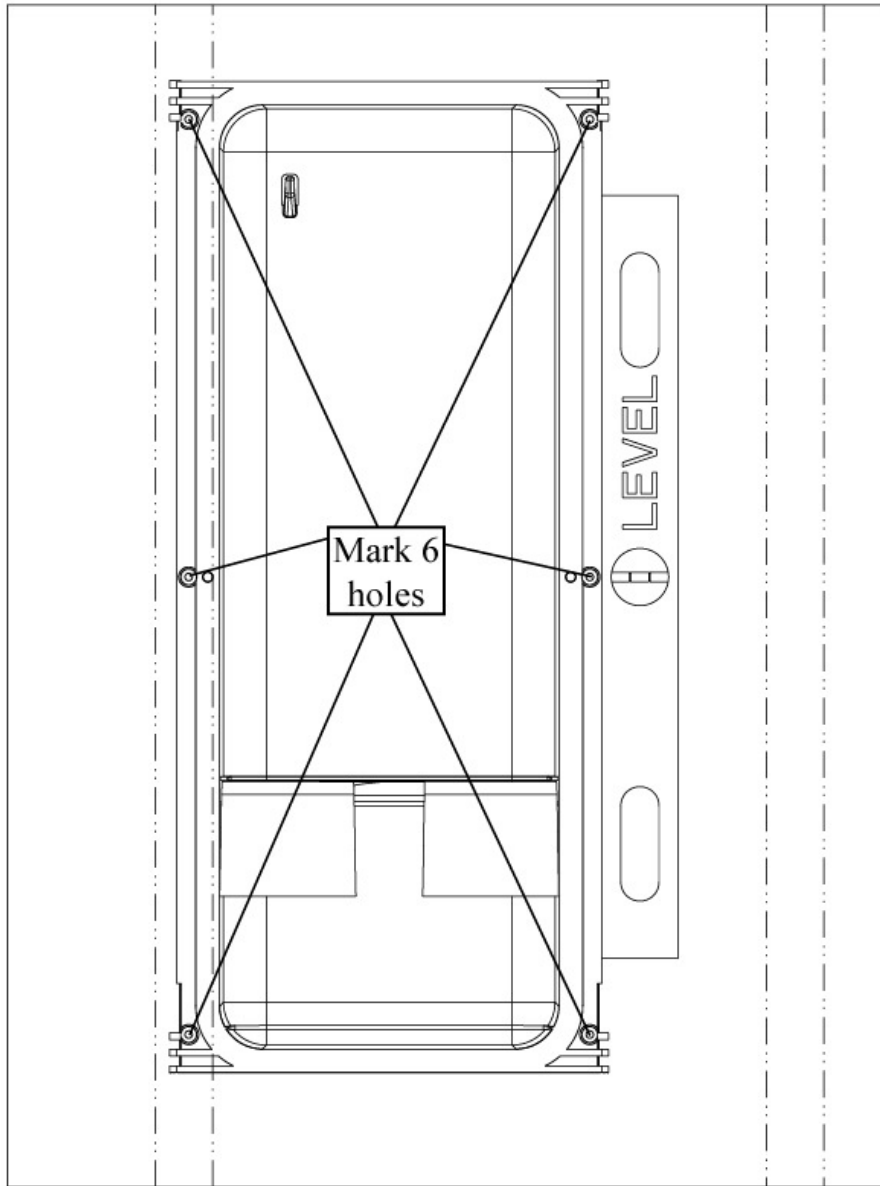


Figure 4

Installation of door

Align top and bottom hinge of door with top and bottom hinge of box (see figure 1), either the right side or the left depending on desired swing. Install top and bottom hinge pins.

Finish door

For painting or staining, prep the area to be finished with a light sanding. Use lightly a 220 grit sand paper to remove the factory sheen.

- For painting; 1st apply an approved primer then paint with compatible paint.
- For staining use an approved gel-stain and follow the manufactures instructions.

***Money Back Guarantee** - If for any reason you're not completely satisfied with your Hy-dit®, return it within 60 days of the date of purchase for a full refund. Your product must be returned undamaged and in its original package with the original receipt to be eligible for a full refund. Shipping and handling is not refundable and return shipping is the responsibility of the customer. Call toll free at 1-866-SHELBER to receive return credit and return instructions.

LIMITED WARRANTY

Helber Industries, Inc., having its principal place of business at 710 Independent Ave., Grand Junction, CO 81505 ("Manufacturer") warrants its Hy-dit® products (the "Products") as follows:

1. **Limited Warranty.**

Manufacturer warrants that the Products sold hereunder will be free from defects in material and workmanship for a period of **one year** from the date of purchase. If the Products do not conform to this Limited Warranty during the warranty period (as herein above specified), Buyer shall notify Manufacturer in writing of the claimed defects and demonstrate to Manufacturer satisfaction that said defects are covered by this Limited Warranty. If the defects are properly reported to Manufacturer within the warranty period, and the defects are of such type and nature as to be covered by this warranty, Manufacturer shall, at its own expense, furnish replacement Products or, at Manufacturer's option, replacement parts for the defective Products. Installation of the replacement Products or replacement parts shall be at Buyer's expense.

2. **Other Limits.**

THE FOREGOING IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Manufacturer does not warrant against damages or defects arising out of improper or abnormal use of handling of the Products; against defects or damages arising from improper installation (where installation is by persons other than Manufacturer), against defects in products or components not manufactured by Manufacturer, or against damages resulting from such non-Manufacturer made products or components. Manufacturer passes on to Buyer the warranty it received (if any) from the maker thereof of such non-Manufacturer made products or components. This warranty also does not apply to Products upon which repairs have been affected or attempted by persons other than pursuant to written authorization by Manufacturer.

3. **Exclusive Obligation.**

THIS WARRANTY IS EXCLUSIVE. The sole and exclusive obligation of Manufacturer shall be to repair or replace the defective Products in the manner and for the period provided above. Manufacturer shall not have any other obligation with respect to the Products or any part thereof, whether based on contract, tort, and strict liability or otherwise. Under no circumstances, whether based on this Limited Warranty or otherwise, shall Manufacturer be liable for incidental, special, or consequential damages.

4. **Other Statements.**

Manufacturer's employees or representatives' ORAL OR OTHER WRITTEN STATEMENTS DO NOT CONSTITUTE WARRANTIES, shall not be relied upon by Buyer, and are not a part of the contract for sale or this limited warranty.

5. **Entire Obligation.**

This Limited Warranty states the entire obligation of Manufacturer with respect to the Products. If any part of this Limited Warranty is determined to be void or illegal, the remainder shall remain in full force and effect.