


Part #: 12SF43-N, 16SF43-N, 20SF43-N, 24SF62-N

Description: Shutter style exhaust fans, 2 and 3 Spd



Features:

- Guards white powder coated
- Motors
 - TEAO(IP55 rating)
 - Permanently sealed ball bearings
 - Permanent split capacitor
 - Class B insulation
 - Automatic thermal overload protection
 - UL recognized in US & Canada
 - Wired with 9ft cord, 115v molded plug end
- Shutters counterweighted to reduce pressure.

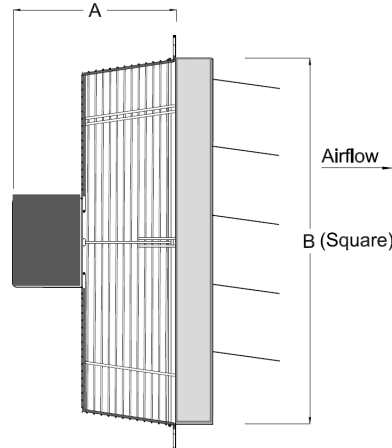

Performance/Specs:

Model #	Blade Dia.	HP	Spd	High CFM	Med CFM	Low CFM	RPM	Volts	Amps	Ph	Hz	Shaft Dia.	Decibels @ 7ft
12SF43-N	11"	1/12	3	1100	825	650	1600	115	.9	1	60	8mm	64
16SF43-N	14"	1/12	3	1435	1075	855	1600	115	.9	1	60	8mm	68
20SF43-N	18"	1/8	3	2860	2150	1700	1570	115	1.05	1	60	8mm	70
24SF62-N	22"	1/4	2	4310	3240	-	1050	115	1.9	1	60	1/2	69

Shipping Info:

Model #	Boxed Dims	Boxed Weight	Pallet Qty	Pallet Dims	Pallet Weight	Dim A	Dim B	Rough-In Opening
12SF43-N	16x16x15	14	45	48x48x85	922	7	12	12.5x12.5
16SF43-N	21x21x15	18	28	48x48x93	544	7	16	16.5x16.5
20SF43-N	24.5x23x12.5	22	28	48x48x93	604	7	20	20.5x20.5
24SF62-N	29x29x16.5	37	20	60x60x90	780	11	24	24.5x24.5

Replacement Parts:

Model #	Motor	Prop	Guard	Shutter
12SF43-N	E060-4B3	9001468	G12SF37-N	SA12SF
16SF43-N	E060-4B3	9001495	G16SF37-N	SA16SF
20SF43-N	E090-4B3	9001494	G20SF37-N	SA20SF
24SF62-N	B180-6B2	9001459	G24SF48-N	SA24SF

E060-4B3/E090-4B3 Wiring Diagram

