



1 Attaching the table legs

- Place the tabletop (A) up-side down on a flat, solid surface.
- Attach a table leg (C) to the tabletop (A) using the 1/4 in x 20 mm bolts (AA) and washers (CC) as shown in the diagram.
- Guide the bolts (AA) through the hole in the table leg (C) into the pre-drilled hole in the tabletop (A).
- Hand tighten three to four turns only. (Do not tighten completely).
- Repeat for the other legs.

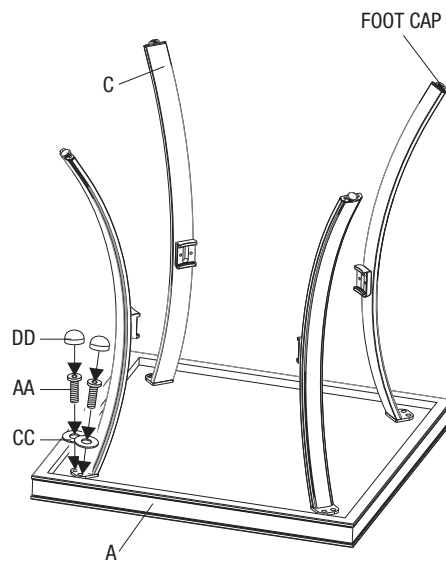

2 Attaching the leg connector bracket

- Attach a leg (C) to the leg connector bracket (B) by using the 1/4 in x 25 mm bolts (BB) and washers (CC) as shown in the diagram.
- Guide the bolts (BB) through the holes in the leg connector bracket (B) into the pre-drilled hole in the leg (C).
- Hand tighten two to three turns only. (Do not tighten completely.)
- Repeat for the other legs.

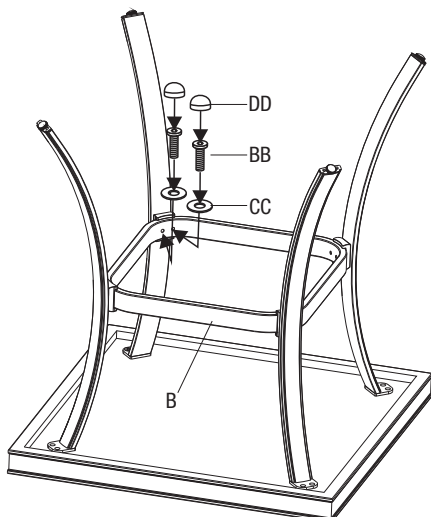

3 Tightening the nuts to the bolts

- Use the hex bolt driver (DD) to tighten all bolts (AA and BB).
- Repeat until all bolts (AA and BB) are tight. (Do not over tighten. Over tightening may strip bolts.)
- Cover all bolts (AA and BB) with covers (DD).