

A **KOHLER** COMPANY

ENSEMBLE_{TM}

Features

- \bullet Compression molded from our exclusive solid Vikrell_ $\!(\!_{\circledcirc}$ material
- Tongue-and-groove 4-piece modular design allows for easy "snap together" installation
- Convenient shelves provide generous storage
- Shaving ledge and foot rest added for comfort
- Receptor can be ordered separately
- Durable high-gloss finish
- 10-year consumer/3-year commercial limited warranty
- 60-1/4" (1530 mm) x 31-1/4" (794 mm) x 76-1/2" (1943 mm) unit rough-in dimensions include nailing flange
- 60" (1524 mm) x 30" (762 mm) x 75-1/4" (1911 mm) complete unit finished dimensions


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- CSA B45
- ASTM E162
- ASTM E662

60" (1524 mm) SHOWER RECEPTOR
AND WALL SURROUND
72170110
ALSO 72170120





Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes		
72170110	60" (1524 mm) x 30" (762 mm) shower receptor and wall surround, curve – left drain (shown)	□ 0	☐ Other	
72170120	60" (1524 mm) x 30" (762 mm) shower receptor and wall surround, curve – right drain	0	□ Other	
Model	Wall Component Description	С	Colors/Finishes	
72232100	Back wall, curve	□ 0	☐ Other	
72175100	End wall set, curve	□ 0	☐ Other	

Technical Information


Model	Door maximum width	Door maximum height
72170110 72170120	56-5/8" (1438 mm)	70-1/2" (1791 mm)


Installation Notes

Install this product according to the installation guide. Size the drain cutout to fit the drain assembly that will be used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned as shown.

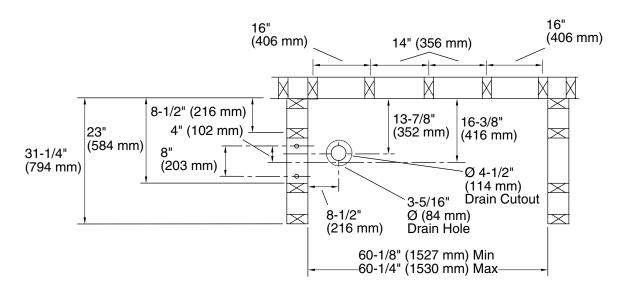

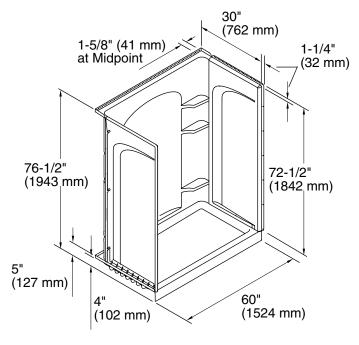

Product Diagram

