


**WATERTILE® OVERHEAD RAIN
SHOWER
K-98741**

Features

- Available in a variety of Kohler finishes that resist tarnishing and corrosion
- Integrated system for ceiling installation
- Chromatherapy lighting with solid colors, color dial and pre-programmed color effects
- Four 22-nozzle sprayheads
- Individually adjustable pivoting sprayheads simulate a gentle summer rain showering experience
- Low profile design complements any décor
- Easy to clean MasterClean™ sprayface
- Requires DTV II digital shower system
- 1/2" NPT connections
- Soldering template included to simplify installation process
- 0.6 gal/min (2.3 l/min) maximum flow rate from each sprayhead (at 80 psi [552 kPa])
- Maximum combined flow of 2.5 gal/min (9.6 l/min)

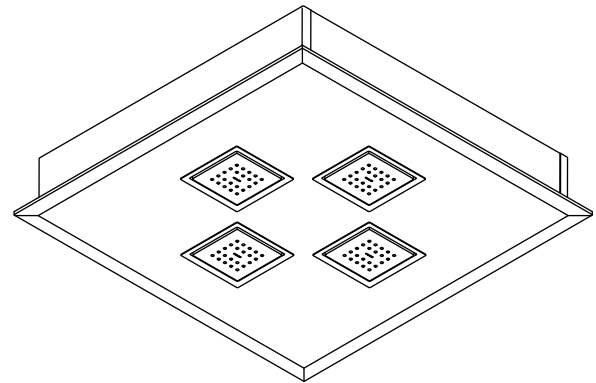

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- Energy Policy Act of 1992

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Accessories

- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-98741	Overhead rain shower	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____	
Required Accessories				
K-638	Media module			<input type="checkbox"/> NA
K-695	Portrait digital interface	<input type="checkbox"/> 1CP	<input type="checkbox"/> 1SN	<input type="checkbox"/> 1AF

Product Specification

The overhead rain shower shall have integrated system for ceiling installation. Shower shall feature chromatherapy lighting with solid colors, color dial and pre-programmed color effects. Shower shall require DTV II digital shower system. Shower shall have four 22-nozzle sprayheads. Shower shall feature individually adjustable pivoting sprayheads to simulate a gentle summer rain showering experience. Shower shall feature a low profile design, which complements any décor. Shower shall have a 0.6 gal/min (2.3 l/min) maximum flow rate from each sprayhead (at 80 psi [552 kPa]) and a maximum combined flow of 2.5 gal/min (9.6 l/min). Shower shall be available with a variety of Kohler finishes that resist tarnishing and corrosion. Shower shall have an easy-to-clean MasterClean sprayface. Shower shall have 1/2" NPT connections. Shower shall include a soldering template to simplify installation process. Overhead rain shower shall be Kohler Model K-98741-_____.

AMBIENT RAIN™

Optional Accessories

K-658	Portrait auxiliary digital interface	<input type="checkbox"/> 1CP	<input type="checkbox"/> 1SN	<input type="checkbox"/> 1AF
K-682-K	Digital mixing valve			<input type="checkbox"/> NA

Technical Information


Cutout dimensions:		
20-1/4" (514 mm) to 20-1/2" (521 mm) x		
20-1/4" (514 mm) to 20-1/2" (521 mm)		
Overhead rain shower:		
100-240 VAC	50-60 Hz	1.7 A

Required Electrical Service

Dedicated circuit required, protected with a Class A Ground-Fault Circuit Interrupter (GFCI) or Residual Current Device (RCD):
120-240 V, 50-60 Hz, 15 A

Installation Notes

Install this product according to the installation guide.

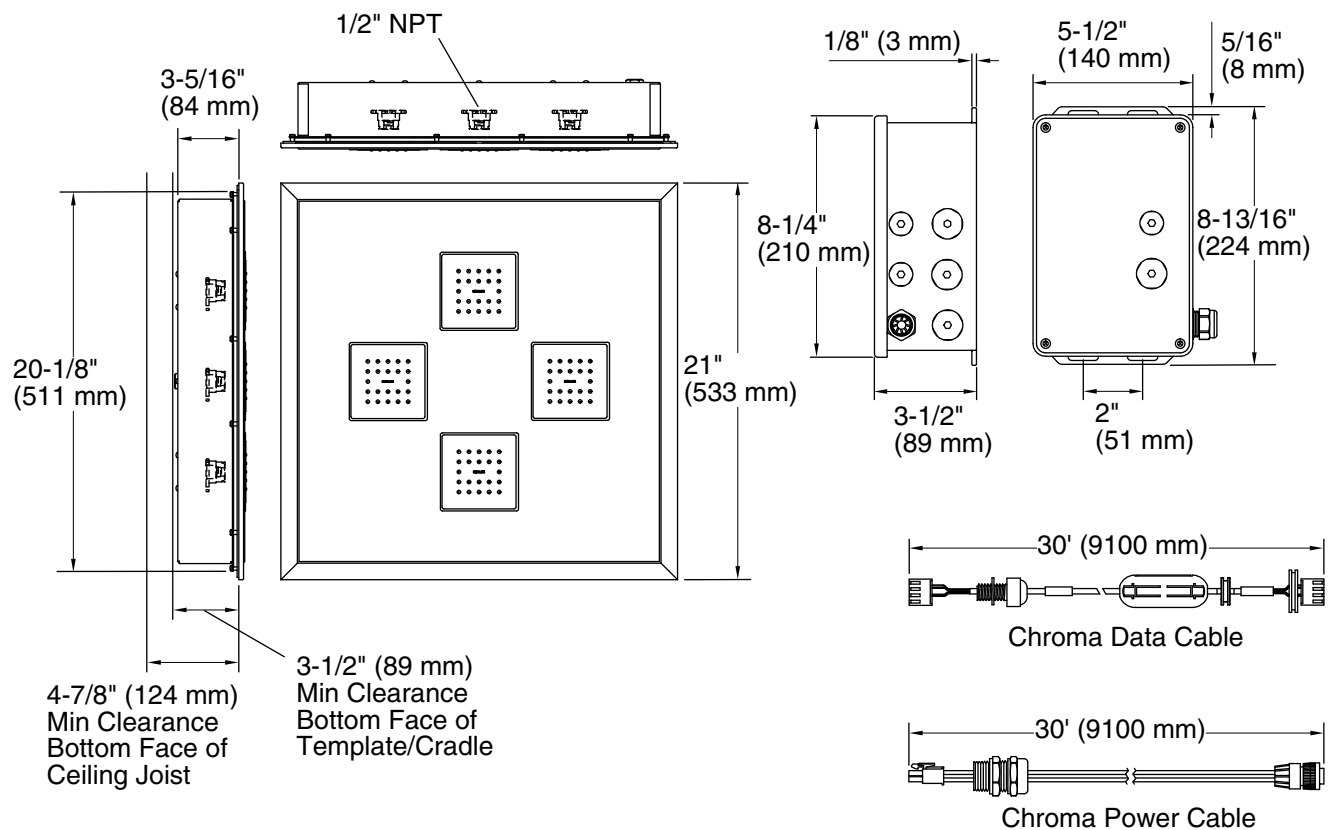

Product Diagram