



# TYPE ONE ASSEMBLY

## Steps to Complete Kitchen Faucet Install

Applicable for the following faucet series:

TKF-022ORB TKF-022BN

- Make sure water source is completely shut off.
- Screw the pipe on to the faucet. Fasten hot and cold flexible hoses into the water supply holes on the bottom of the faucet if necessary.
- Carefully lower the faucet through the panel and counter hole.
- Slide the rubber washer and the 1.5-inch metal washer and lock nut onto the pipe and tighten the fastener.
- Connect pull-out hose with quick connector. Assemble the weight and screws on the pull-out hose, then connect to the supply line source. The flexible hose on the right should be attached to the cold water supply line. The flexible hose on the left should attach to the hot water supply line. Tighten these connections accordingly.
- With the faucet's lever wide open, slowly turn the handles on the hot and cold water supply lines to the open position until the desired flow rate is achieved. Allow the faucet to run for a few minutes to get rid of any air pockets.

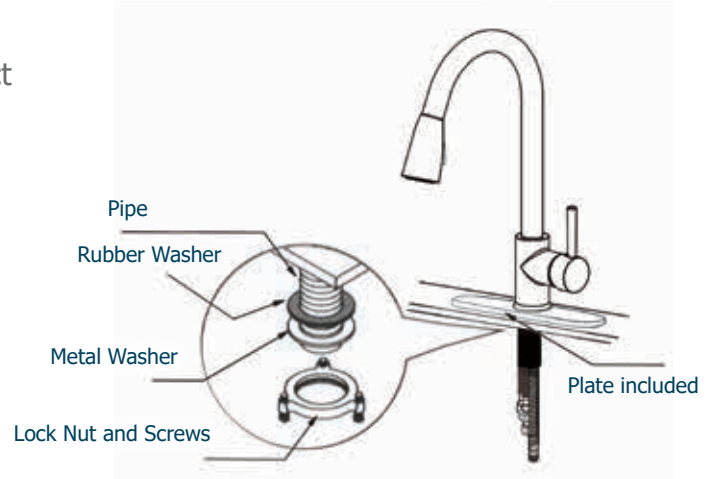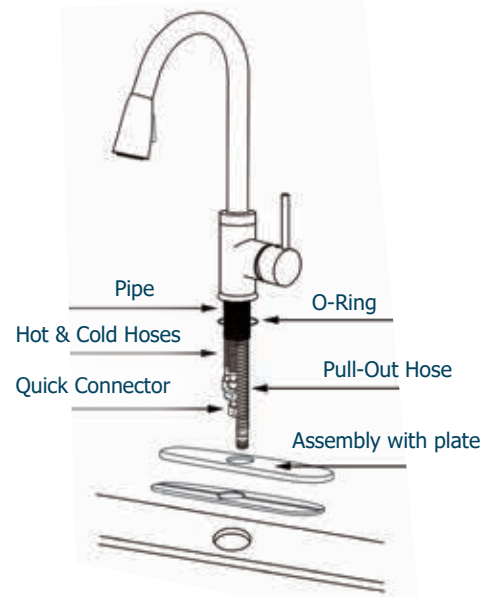


## TOOLS NEEDED FOR ASSEMBLY

(not included)

Crescent Wrench

Phillips

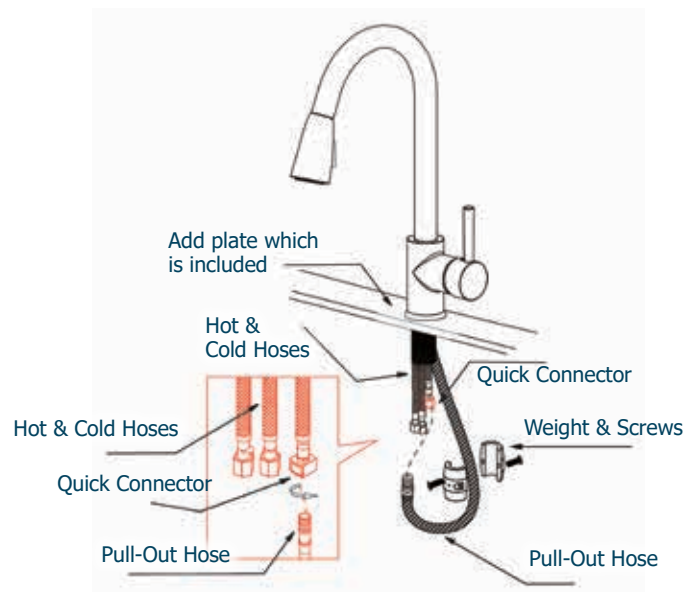

Questions, problems, missing parts? Before returning to your retailer, write our customer service department at: Topia, Inc., Attn: Product Support, 3533 E. Corona Ave., Phoenix, AZ, 85040, USA.