





Rating	10A 125 VAC, 20A 277 VAC	Mount Hole		Circuit Structure	
Contact R	50m ohm Max.				
Insulation R	DC 500V 100M ohm Min.				
Dielectric Strength	AC 1500V 1 minute				
Circuit	2P SPST OFF-ON				
Operation Force	700g ± 200g				

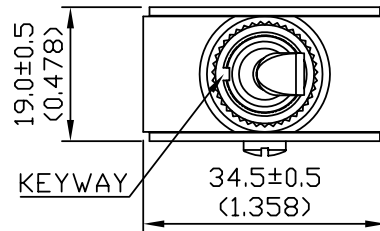

1 HEX NUT ASSY  
1 BLACK KNURL NUT ASSY  
Packing: As GB's standard pack  
( 1 pce/blister card, 5 pcs  
/box stick with one label)

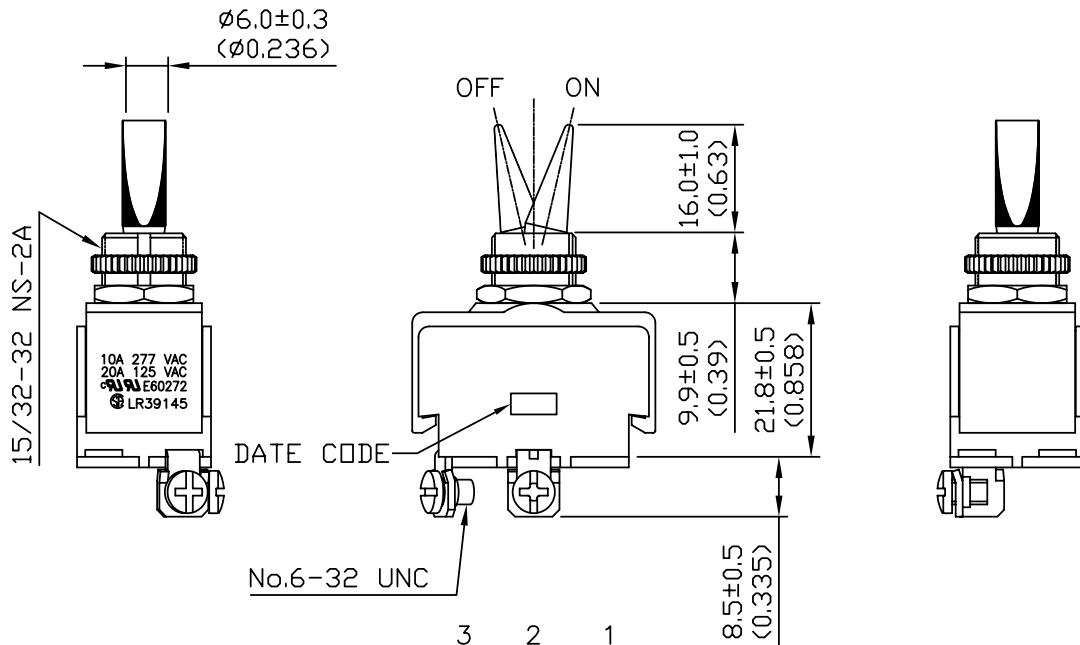

ON  
ENCENDIDO  
MARCHÉ

OFF  
APAGADO  
ARRÊT

