

DESCRIPTION

The ALL-PRO LED Wall Pack is a dependable and reliable outdoor security lighting solution. It offers the same aesthetically pleasing look of traditional Metal Halide fixtures with the superior performance of a LED solution. This LED Wall Pack uses less power and has maintenance free LEDs, resulting in maintenance and energy savings. This product is an easy to install, high quality and durable LED lighting solution ideal for residential and commercial applications.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Construction

- Durable, die cast aluminum housing
- Heat and impact resistant glass lens
- Available in bronze finish

Electrical

- Maintenance- free LEDs with 50,000 hours of life
- Fixture operating temperature range from -40°C to 40°C
- Universal Voltage power supply
- cULus listed for Wet locations

Optical

- 5000K color temperature perfect for security applications

Warranty

- 5 year limited warranty




WP2547L/WP3450L




WP2550L

DIMENSIONS

WP2547L and WP3450L

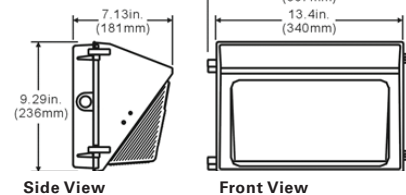

WP2550L



ORDERING INFORMATION

Catalog #	Description	Voltage	Power	Delivered Lumens	Efficacy Lumen/ Watt	LED Color Temperature (K)	CRI
WP2547L	LED Wall Pack	120V-277V	23	2700	117	5000K	73
WP2550L	LED Wall Pack	120V-277V	28	3000	107	5000K	73
WP3450L	LED Wall Pack	120V-277V	38	3500	92	5000K	72

LED WALL PACK SERIES

WP2547L

WP2550L


WP3450L

PHOTOMETRICS

0.25 Fc Coverage Area

Mounting Height (Z)	Catalog Number	Lumens	10'		15'	
			X	Y	X	Y
WP2547L	2700	31	50	32	54	
WP2550L	3000	34	56	33	62	
WP3450L	3500	38	58	42	70	

X = Forward Throw
Y = Wall Spread
Z = Mounting Heights

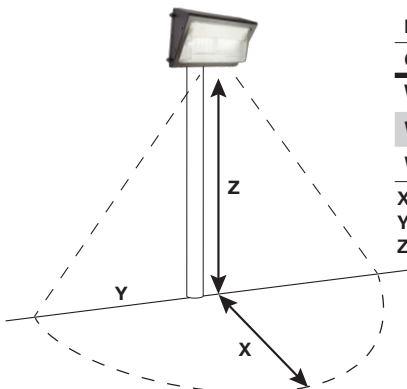

CERTIFICATION DATA

UL/CUL Wet Location Listed
Lighting Facts® Approved

TECHNICAL DATA

120V-277V
-40°C to 40°C Temperature Rating
External Supply Wiring 75° Minimum