

WALLSAFE/WLSFB

Wall Safe

Wall Mount Instructions

Parts Included In This Box: 4 AA Batteries 2 Keys 4 Screws 4 Screw Anchors 1 Wall Safe



1

Open shipping carton and find 4 AA batteries and 2 keys in the plastic bag.




2

Insert the key into the lock and turn the knob to open the safe. Remove the screws and anchors.



3

4 phillips screws and 4 expansion anchors are located inside the safe.

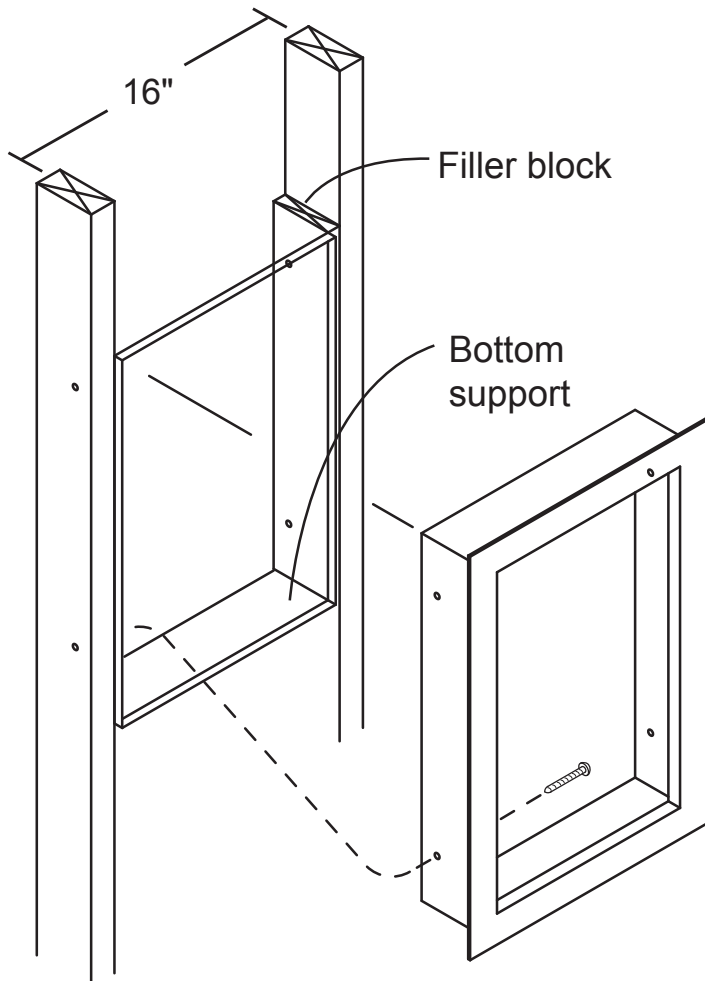

4

This safe must be secured to two wood frame wall studs (16" center) so it is anchored to the wall studs in four locations.

5

If necessary, cut a hole in the wall the same size as the back of the safe. (Contact a professional carpenter.) Use filler blocks and bottom support as required.

6

Mark the four hole locations and drill four 3/16 inch diameter pilot holes. Secure the safe to the wall studs using 4 phillips screws, through the four pre-drilled mounting holes in the safe, with the frame of the safe flush to the wall surface.

7

(The ribbed plastic screw anchor is an expanding shield that expands as the screw is tightened. The anchor can be used in all types of base materials including concrete and gypsum drywall.)