
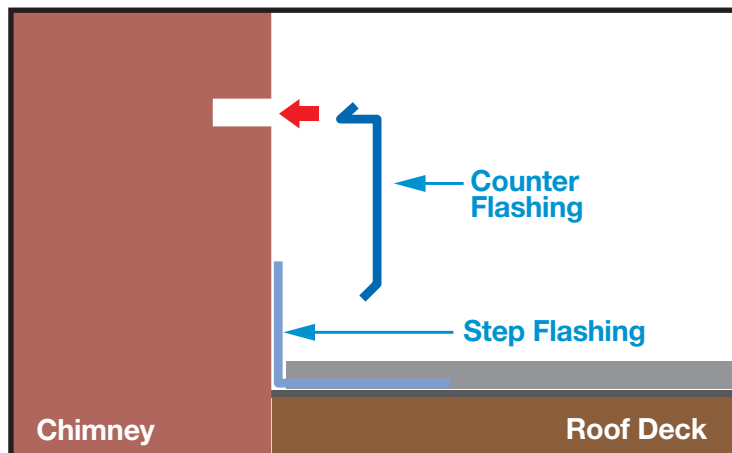


Gibraltar Counter Flashing is available in 26 gauge bare galvanized or zinc coated steel. Counter Flashing is flashing that flashes flashing! In the case of a chimney, counter flashing protects the Step Flashing at the base of the chimney.

The top of the counter flashing (B) is bent into a V shape and inserted into a groove, called a reglet. To make a reglet, a circular saw with a masonry blade is used to cut a kerf into the wall. A thin bead of quality non-tar sealant, is used to create a durable, long lasting seal.

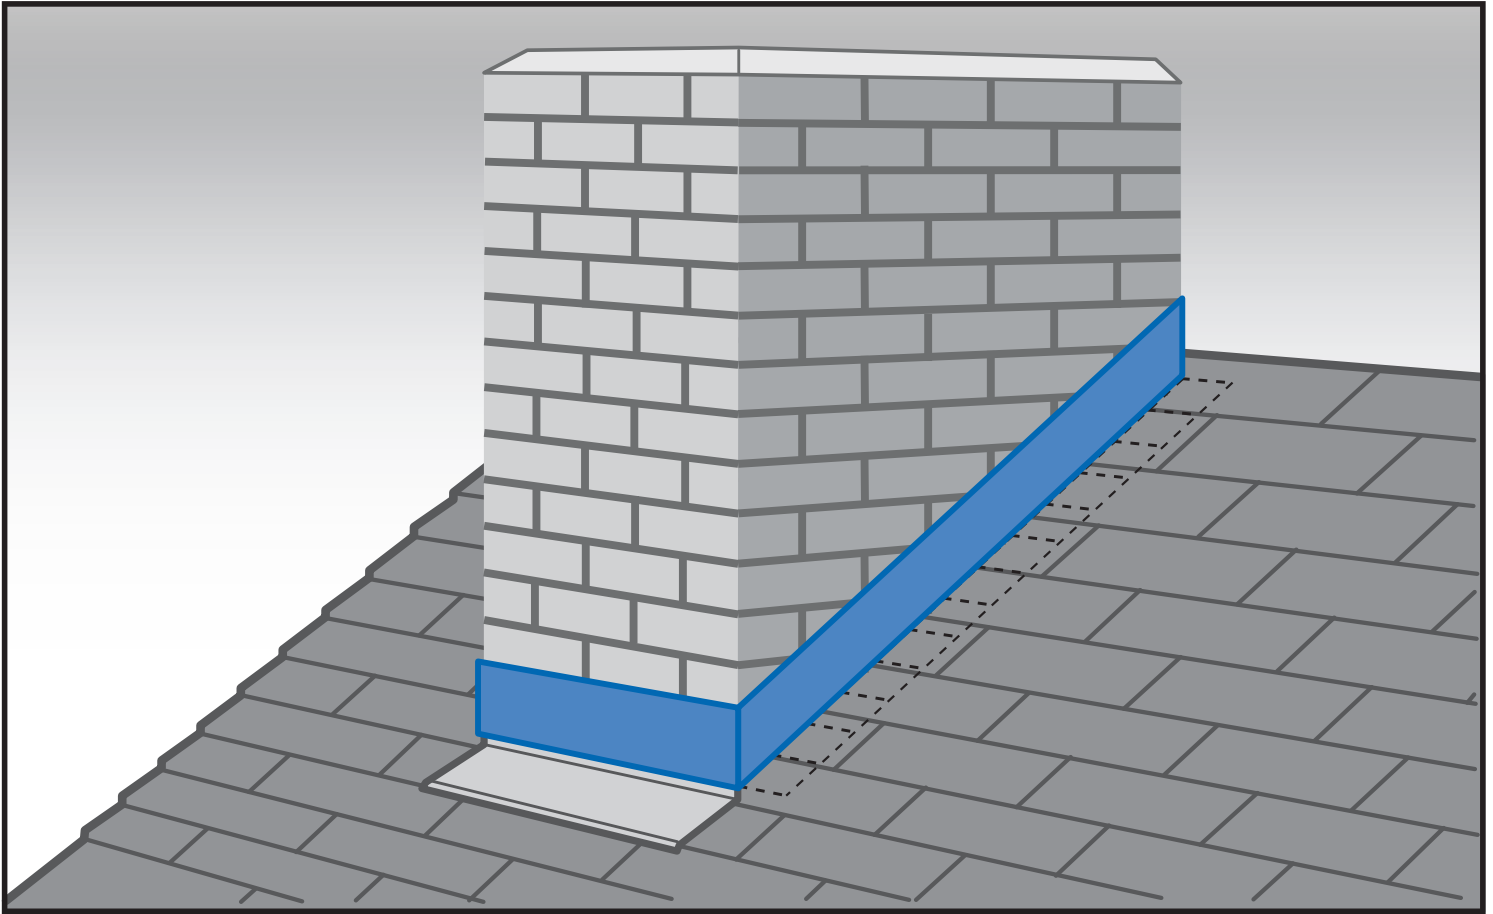

Galvanized counter flashing has sharp edges. Use gloves to prevent injury. This product is not recommended for direct contact with treated lumber.

Working above grade is inherently dangerous, be sure that proper fall protection measures are in place. When working with power tools and sheet metal, gloves and eye protection are absolutely required.

These basic installation guidelines are for use with typical or standard applications. It is always recommended to seek advice from a licensed professional, and to check with your local building inspector or building permit office for approvals and possible variations that may apply.