

tuff-tape

COMPOSITE DRYWALL TAPE

Ideal for flat seams and inside corners where paper drywall tape has failed.

Product Description

- Replaces paper drywall tape.
- Resists blisters, tears, and common cracking problems.
- Four times stronger than paper tape.
- Rustproof.
- Cuts easily with knife or scissors.
- Second coat of compound can be applied immediately – very light skim-coat to finish.


Applications

- Flat seams and inside corners where paper drywall tape has failed.
- Areas where strength and speed of finish is required.
- Areas where humidity may cause paper tape to fail.




Advantages over Competitors

STRAIT-FLEX TUFF-TAPE	PAPER TAPES
Will Not Soften or Sag	Softens and Sags When Wet
Four Times Stronger Than Paper Tape	Tends to Hairline Crack with Temperature Change or Structural Movement
No Blisters or Fuzz-Ups	Fuzzes Up During Sanding
Superior Bonding	Good Bonding
Ideal for Novice or Pro	Requires Skill or a Professional

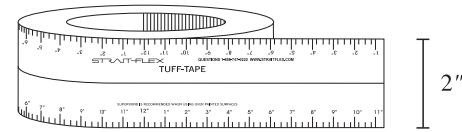

Directions for Use

- 1 Cut Strait-Flex TUFF-TAPE to desired length. Fold in half at center crease for inside corners.
- 2 Using a 5" or 6" taping knife, apply a liberal coat of all-purpose joint compound to flat joints or inside corners.
- 3 Press TUFF-TAPE into wet compound. Adjust if necessary to create a straight line and wipe down with taping knife. Immediately apply light skim coat of joint compound and let dry.
- 4 Apply final coat, let dry, and sand.

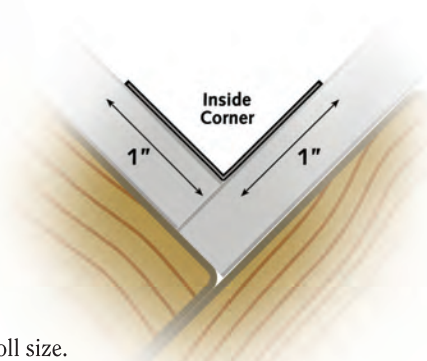

Specifications

- | | | | |
|---|--|--|--|
| ■ 2" x 50' roll size. | ■ 2" x 50' roll size. | ■ 2" x 100' roll size. | ■ 2" x 100' roll size. |
| ■ Color Code RED | ■ Color Code RED | ■ Color Code RED | ■ Color Code RED |
| ■ Item# TT-50-6 | ■ Item# TT-50-12 | ■ Item# TT-100R | ■ Item# TT-100 |
| ■ RETAIL PKG
6rls per tray. One tray per case. (6-Pack)
Case weight: 9 lbs.
48 cases per pallet. | ■ RETAIL PKG
6rls per tray. Two trays per case. (12-Pack)
Case weight: 17 lbs.
24 cases per pallet. | ■ RETAIL PKG
6rls per tray. Two trays per case. (12-Pack)
Case weight: 18 lbs.
24 cases per pallet. | ■ WHOLESALE PKG
12rls per case.
Case weight: 17 lbs.
24 cases per pallet. |

Warranty

Strait-Flex products are backed by a lifetime warranty. When applied to a sound structure, built on a permanent foundation using recommended application techniques, we warrant that these products will not edge-crack for the lifetime of the structure. Contact Strait-Flex International, Inc. for complete details.


Storage

Store in a dry place protected from moisture.

Endorsements

Strait-Flex products are endorsed by the IUPAT (International Union of Painters and Allied Trades) of North America. Strait-Flex products are used in their day-to-day training curriculums.

Check out our website at www.straitflex.com

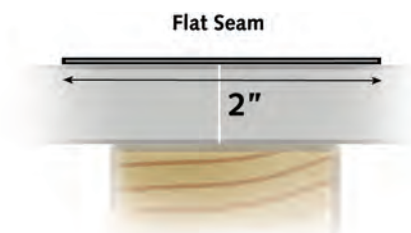

STRAIT-FLEX INTERNATIONAL, INC. O'FALLON, MO
PHONE: 888.747.0220 FAX: 636.300.0414
STRAITFLEX.COM

L610909