

## **WELLWORTH**<sub>®</sub>

#### **Features**

- Vitreous china
- Elongated bowl
- Class Five<sub>®</sub> flushing system
- Polished chrome trip lever
- Less seat and supply
- 12" (30.5 cm) rough-in
- 1.28 gpf (4.8 lpf)
- 2-1/8" (5.4 cm) fully glazed trapway
- 11-1/4" (28.6 cm) x 8-1/4" (21 cm) water area
- 30" (76.2 cm) x 19-5/8" (49.8 cm) x 28-1/4" (71.8 cm)

## **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ASME A112.19.2/CSA B45.1
- EPA WaterSense<sub>®</sub>







#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### **Accessories**

- 0: White
- · CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

## **Specified Model**

Model	Description	Trip Lever	Colors/Finishes	
K-3575	Class Five toilet	left-hand	□ 0	☐ Other
K-3575-RA	Class Five toilet	right-hand	□ 0	☐ Other
K-3575-RZ	Class Five toilet with Insuliner® and tank cover locks	right-hand	□0	☐ Other
K-3575-T	Class Five toilet with tank cover locks	left-hand	□ 0	☐ Other
K-3575-TR	Class Five toilet with tank cover locks	right-hand	□ 0	☐ Other
K-3575-U	Class Five toilet with Insuliner	left-hand	□ 0	☐ Other
K-3575-UR	Class Five toilet with Insuliner	right-hand	□ 0	☐ Other
K-3575-UT	Class Five toilet with Insuliner and tank cover locks	left-hand	□ 0	☐ Other

## **Product Specification**

The elongated bowl toilet shall be made of vitreous china. Toilet shall be 30" (76.2 cm) in length, 19-5/8" (49.8 cm) in width, and 28-1/4" (71.8 cm) in height with a 11-1/4" (28.6 cm) x 8-1/4" (21 cm) water area. Toilet shall be 1.28 gpf (4.8 lpf) with Class Five lushing system. Toilet shall include polished chrome trip lever. Toilet shall have 2-1/8" (5.4 cm) glazed trapway. Toilet shall be 12" (30.5 cm) rough-in, less seat and supply. Toilet shall be Kohler Model K-3575-\_\_\_\_\_-\_\_\_.

# **WELLWORTH**<sub>®</sub>

Recommended Accessories					
K-4664	Brevia™ seat with cover	□ 0		☐ Other	
K-4688	Cachet <sub>®</sub> seat with cover	□ 0		☐ Other	
K-7637	Angle supply with stop – 3/8" NPT		□ CP	☐ Other	


### **Technical Information**

Fixture:	
Configuration	two-piece, elongated
Water per flush	1.28 gpf (4.8 lpf)
Passageway	2-1/8" (5.4 cm)
Water area	11-1/4" (28.6 cm) x 8-1/4" (21 cm)
Water depth from rim	5-1/4" (13.3 cm)
Seat post hole centers	5-1/2" (14 cm)

Included components:				
Bowl	K-4198			
Tank	K-4436			
Tank cover	84591			
Trip lever	K-9380			
Tank accessory pack	1016548			
Bolt cap accessory pack	1013092			

#### **Installation Notes**

Install this product according to the installation guide.

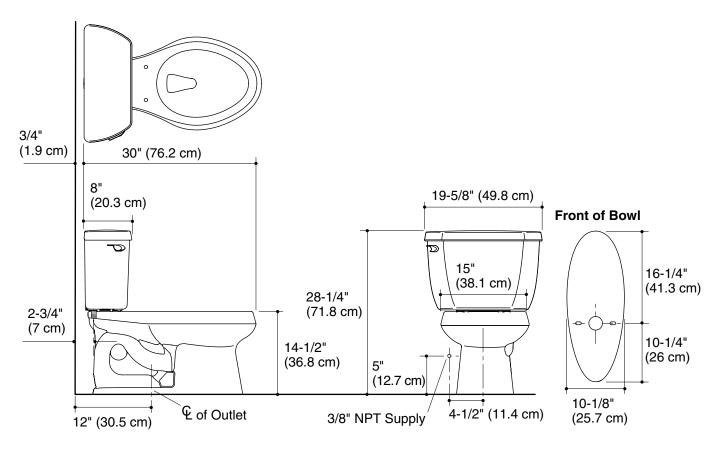

**Product Diagram** 

