



NOVATTO

< ; '& (B 7 B D9 : C KZhhZa; Vj XZi !
B ViiZ 7aX

Requested By: _____

Specific Features: _____

HI 6C96G9 HE: 8> ; 86I >DCH/

- Single handle control
- Solid brass construction
- High pressure ceramic cartridge
- Single hole deck mount installation
- Spout reach: 4.5-inches
- Spout height: 8-inches
- 1.5-inch mounting hole diameter
- cUPC and AB1953 low lead compliant
- NSF 61 and NSF 372 certified

L 6GG6CI V



Limited lifetime warranty

- See www.NovattoInc.com for details

8DDG9 >C6I >C< 688: HHDG> H/

- PUD-MB pop-up drain
- MR-001MB mounting ring
- Glacier Ice Restoration and Sealer kit

CDI : H

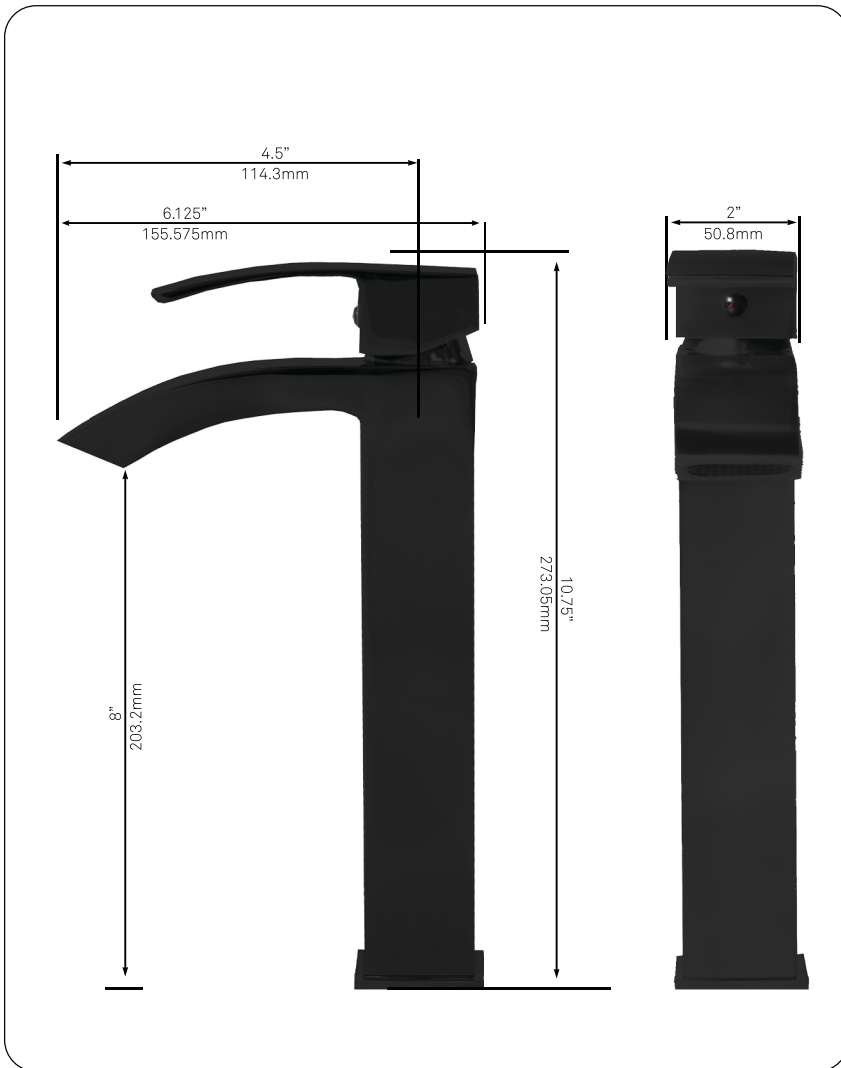

Novatto reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only, see www.NovattoInc.com for finish options and product availability.

Novatto Inc
TOLL FREE 844.404.4242
www.NovattoInc.com