

WAREHOUSE OF TIFFANY, INC

Installation and Wiring Instructions:

ITEM:LD4025-5

NOTE: ALWAYS TURN POWER OFF BEFORE INSTALLING LIGHTING FIXTURE

IMPORTANT: YOU SHOULD USE A QUALIFIED ELECTRICIAN TO INSTALL THIS FIXTURE

Installation

1. Pass the Lampholder Wire(A) through the Ceiling Canopy(J)

2. Fix the Mounting Plate(C) to the Outlet Box(F) with Box Screw(D).

3. Wiring:

1). Split the conductors of the fixture wire about 4 inches. Being careful not to expose any of the wire inside of the insulation.

2). Connect the Fixture Ground Wire(E) and Outlet Box Supply Ground Wire(G) to Mounting Plate(C) with GREEN hex-head ground screw to appendix hole in mounting plate marked "GND".

3). Parallel connect the Lampholder Wire(A) with the Fixture Wire(B), which is supplied in the accessories bag. White connect with white and black connect with black. Then connect the white Fixture Wire(B, Neutral Wire) to the outlet box supply wire (White). Connect the other half of the Fixture Wire(B) that is black (Live Wire) to the outlet box supply wire (Black or Red). Use wirenuts provided.


4). Spread the electrical supplies so that the black wire are on one side of the outlet box and white wire are on the other side.

4. Fix the Ceiling Canopy(J) to the Mounting Plate(C) with Mounting Screw(H) and Screw Cap(I).

Recommendation: Maximum 60 WATT Type ST64 or ST58 bulb(5pcs bulbs included). Pls take care when assembling as it's fragile).

Cleaning of your lamp:

Turn power off. Wipe with a damp cloth. Do not use abrasives.

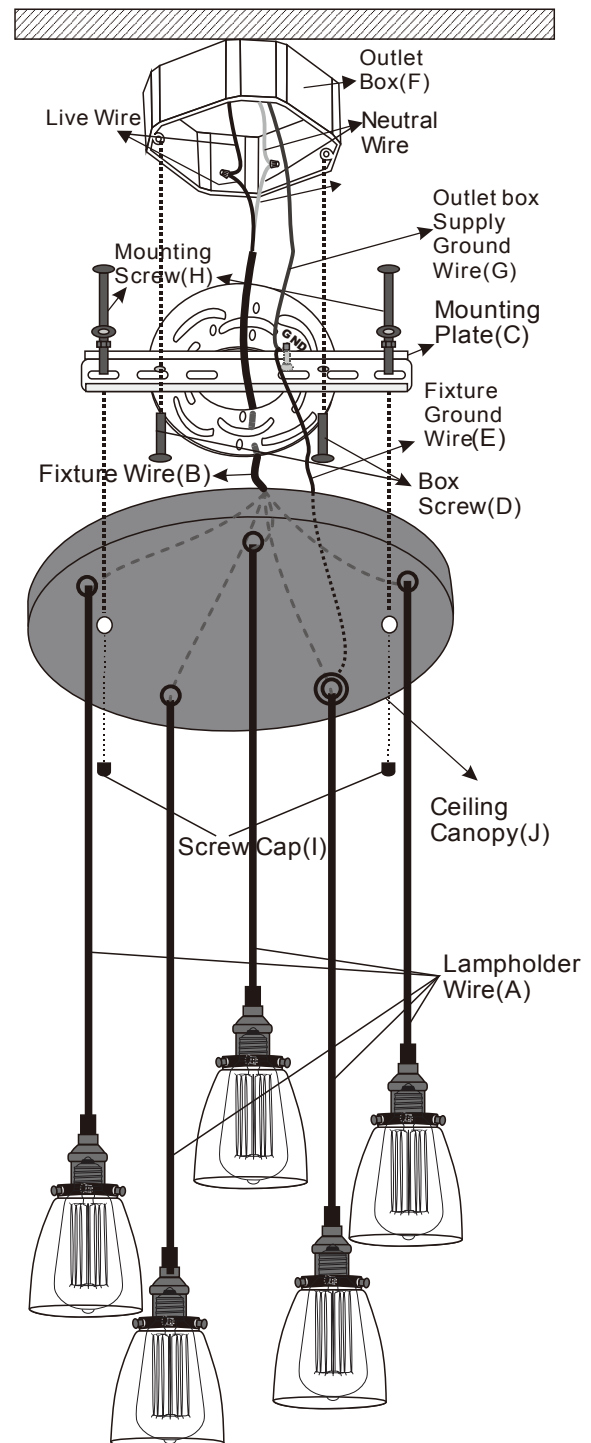

***SAVE THIS INSTRUCTION FOR FUTURE REFERENCE.**

MADE IN CHINA

Revision - 02/25/15