

3. Place the aerator tip in a safe place for storage.

4. Fit the diverter valve onto the kitchen faucet, or if the thread sizes do not match, use the included adapter between the diverter valve and the kitchen faucet. Uncover the sink drains.



4. Turn on the COLD water slowly. Notice the water flowing through the larger diverter valve spout into sink basin. Turn the diverter valve lever to the left slowly so that its perpendicular to the spout. Water will flow through system and dispense from smaller outlet on the diverter valve. Some water discoloration and air bubbles may be present due to loose carbon. Allow water to run through system for 5 minutes until water runs clear and free from air bubbles.

5. Check for leaks before leaving installation.

6. Use diverter valve lever to switch between filtered and unfiltered water. **Do not filter hot water through your Home Master Mini.**

7. Turn off water supply when finished.




Perfect Water Technologies, Inc.

Copyright © 2017


Perfect Water Technologies

# Home Master® Mini Installation & Service Manual

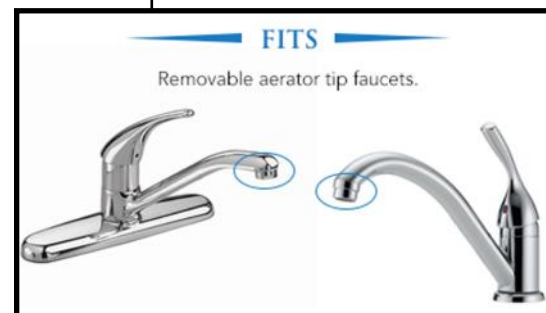

### Assembly Instructions

1. Unbox and unwrap the system. Keep plastic bags out of reach of children.
2. Locate filter and base. Notice that the filter is already fit onto base. Please gently double-check that its snug tight.

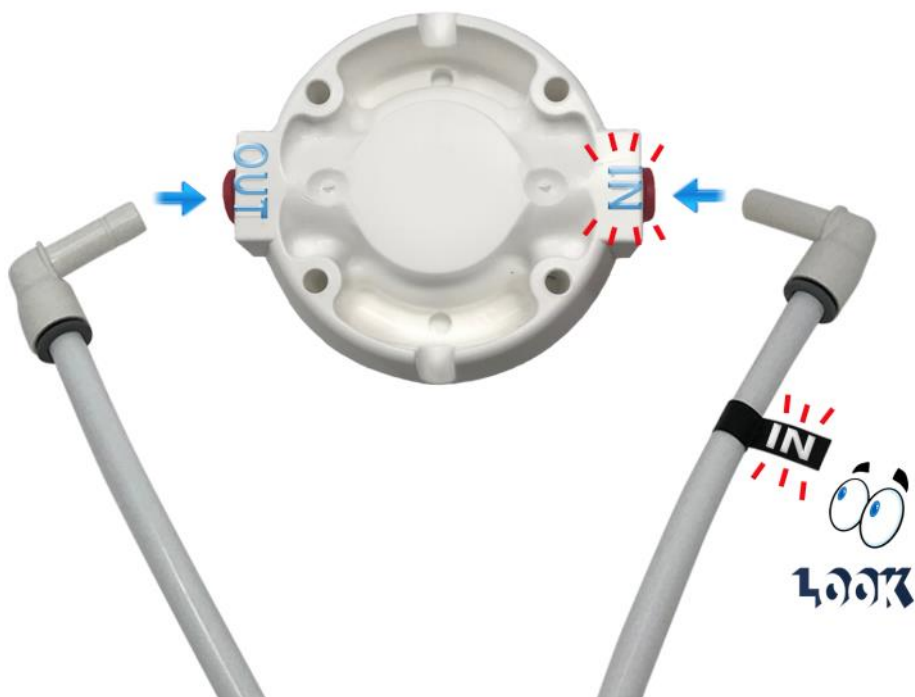

3. Notice the red collet rings on the inlet and outlet ports on the base. Look for the IN and OUT labels found on the underside of the base.

Friendly Support: 1-877-693-7873  
[Support@ThePerfectWater.com](mailto:Support@ThePerfectWater.com)

4. Locate pre-assembled 36" tubing with the kitchen faucet diverter valve on one end and the elbow fittings on the other. Notice that one of the elbow fittings has its connecting tube tagged with black tape. **IMPORTANT:** Gently push this elbow stem into the red collet ring port labeled IN.

About 1/8" of the stem will still be visible when the stem is inserted fully as shown here.

**The other elbow fitting does not have any tape or tag.** Please connect that one to the red collet ring port labeled OUT in the same manner.

NOTE: to remove the elbow fitting stem from the base, depress the red collet ring fully against the base, while simultaneously, gently pull out the elbow. Very little force is required, but some wiggling and patience may be involved. Please do not use tools or brute force. **Please call for support 877-693-7873.**

### Installation Instructions

#### Tools Required

Towel • Pliers

1. **COVER THE SINK DRAINS.** Place the Home Master® Mini next to sink. Either side OK.
2. **Installation:** Locate and unscrew the aerator tip from your kitchen faucet. If the tip is stuck, cover the tip with a rag or towel to protect its finish, and use a pair of pliers to loosen.

