


HARDWARE PACKAGE

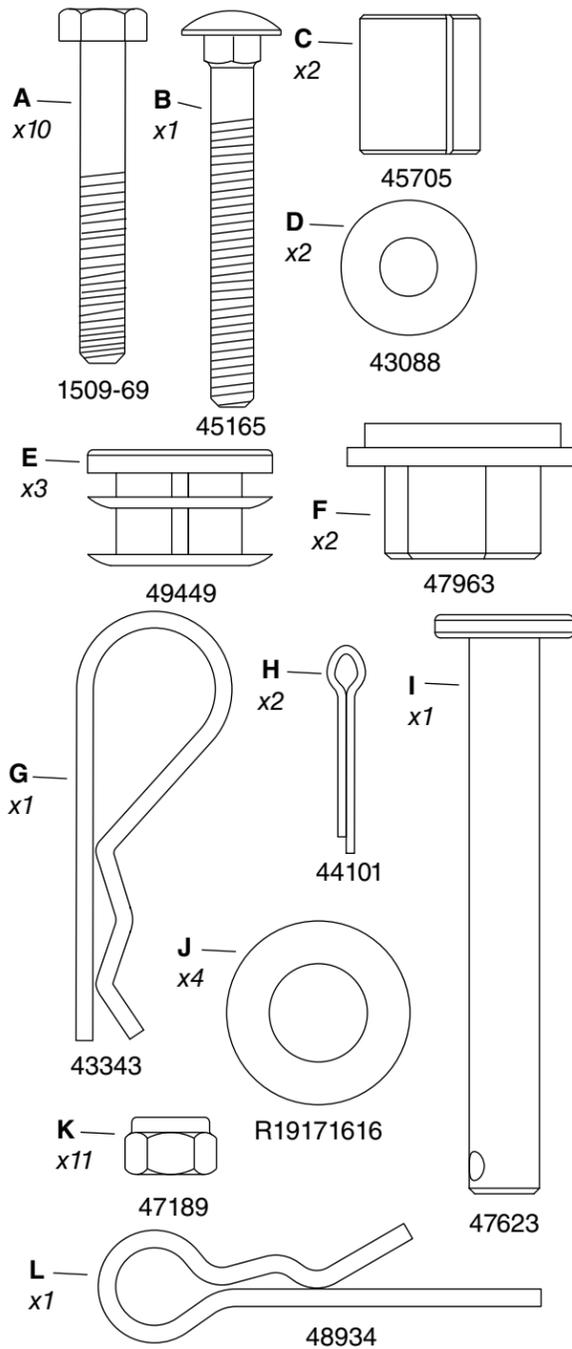

NOTE: Left and Right are determined by the driver's seated position on the tractor.

STEP 1 (SEE FIGURE 1): Attach the flow plate (9) to the hopper (1) as shown in figure 1.

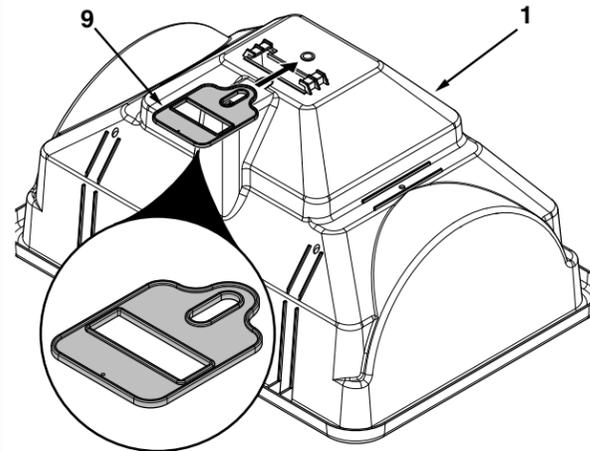


Figure 1

STEP 2 (SEE FIGURE 2): Attach the control cable (4) to the hopper (1) by inserting the end of the cable through the hold in the flow plate (9) and pressing the plastic anchor firmly into the slot in the hopper until it locks into place.

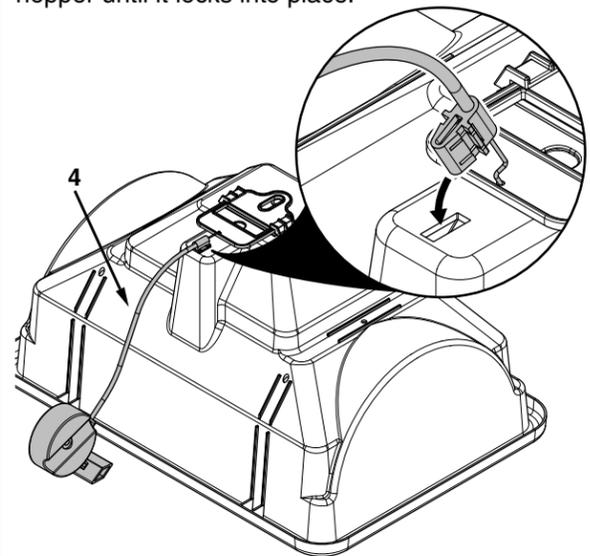


Figure 2

STEP 3 (SEE FIGURE 3): Loosely attach the frame tubes (7) to the crossover brace (10) using four 1/4 x 1-3/4" hex bolts (A) and 1/4" nylock nuts (K). **Do Not Tighten!** Insert the long end of the axle through the right side of the frame tube assembly and then insert the flat end through the left side of the frame assembly as shown.

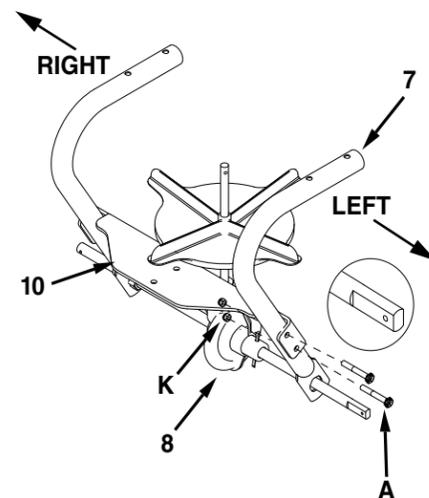


Figure 3

STEP 4 (SEE FIGURE 4): Insert a tube plug (E) into the end of each frame tube. Slide a flange bearing (F) over each end of the axle and secure into the frame tubes. Make sure the gearbox is centered and the impeller shaft is vertical.

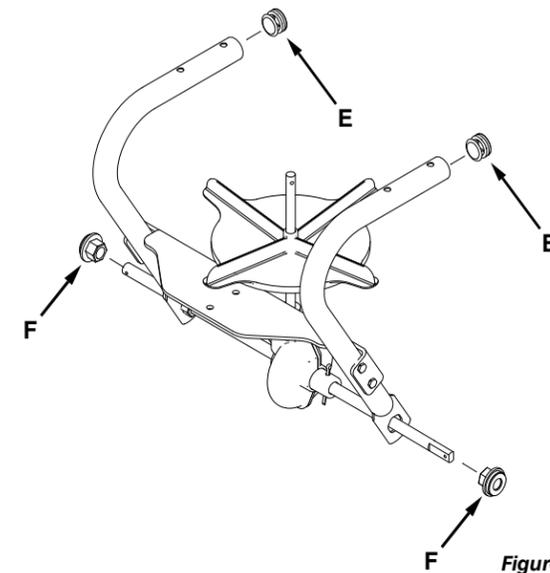


Figure 4

STEP 5 (SEE FIGURE 5): Attach the hopper (1) to the frame assembly using two 1/4 x 1-3/4" hex bolts (A) and 1/4" nylock nuts (K). Insert the hairpin agitator (L) into the impeller shaft making sure that it is secured in place and horizontal.

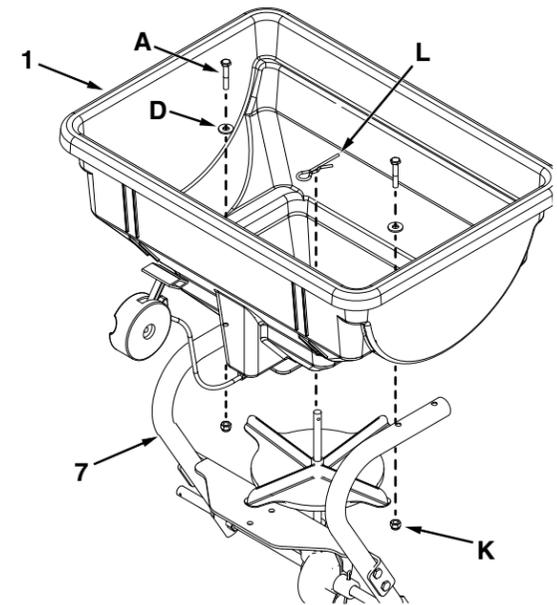


Figure 5

STEP 6 (SEE FIGURE 6): Slide a washer (J), a spacer (C), a drive wheel (6), and another washer (J) onto the flat end of the axle. Secure with a cotter pin (H) by sliding it through the hole in the axle and bending the ends.

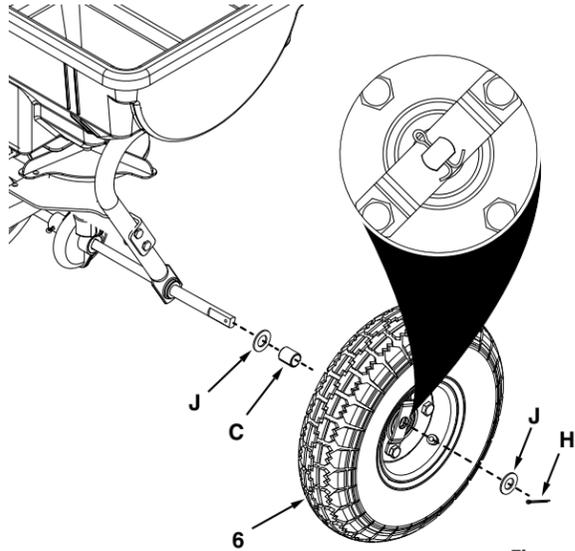


Figure 6

STEP 7 (SEE FIGURE 7): Attach the other wheel by sliding onto the right end of the axle a washer (J), a spacer (C), a wheel (5), and another washer. Secure with a cotter pin (H) by sliding it through the hole in the axle and bending the ends.

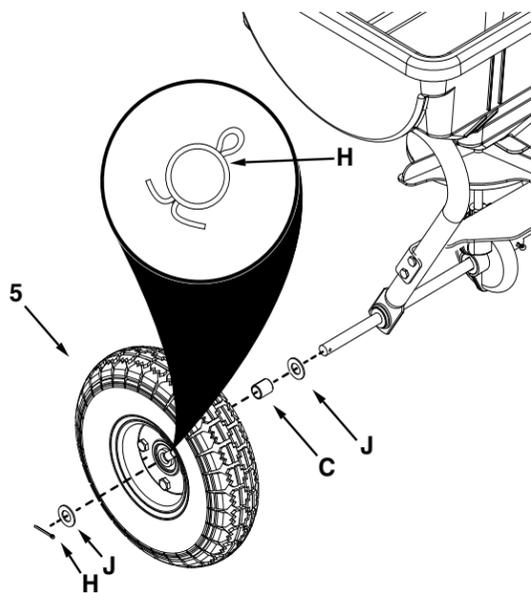


Figure 7

STEP 8 (SEE FIGURE 8): Attach the control tube (2) and the hitch tube (3) to the assembly using two 1/4 x 1-3/4" hex bolts (A) and nylock nuts (K).

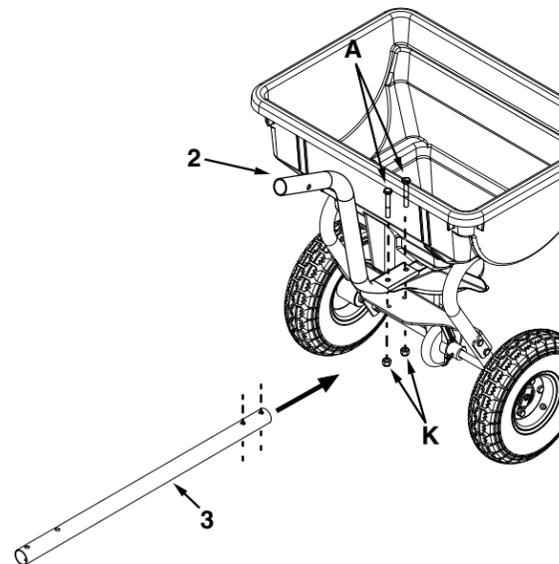


Figure 8

STEP 9 (SEE FIGURE 9): Attach the control cable to the control tube using a 1/4 x 2" carriage bolt (B) and 1/4" nylock nut (K). Insert a tube plug (E) into the end of the control tube.

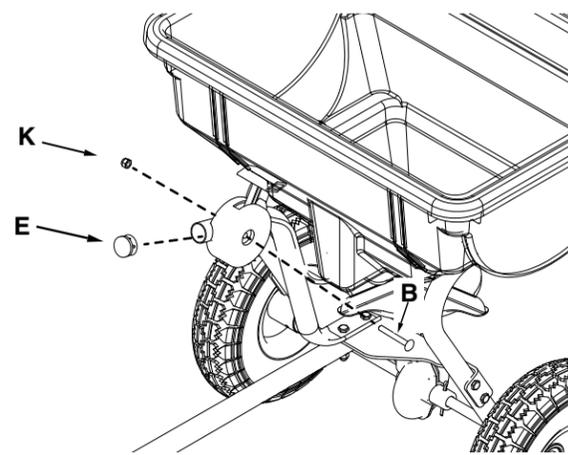


Figure 9

STEP 10 (SEE FIGURE 10): Attach the hitch brackets to the hitch tube using two 1/4 x 1-3/4" hex bolts (A) and nylock nuts (K). Insert the hitch pin (I) through the hitch brackets and secure with a hair cotter pin (G).

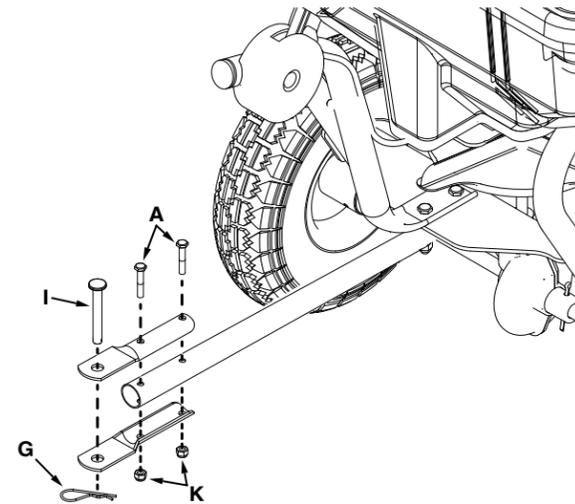


Figure 10