

## DESCRIPTION

The ALL-PRO™ LED Dusk to Dawn Wall Pack is a dependable and reliable security lighting solution to the 26W compact fluorescent, Metal Halide, and High Pressure Sodium fixtures. It offers the same aesthetically pleasing look with the superior performance of a LED solution. This LED Wall Pack uses less power and has maintenance free LEDs, resulting in maintenance and energy savings. The dusk to dawn photocontrol allows the fixture to operate when needed with nighttime ON and daytime OFF. This product is an easy to install, high quality and durable LED lighting solution ideal for residential and commercial applications.

<b>Catalog #</b>		<b>Type</b>
<b>Project</b>		
<b>Comments</b>		<b>Date</b>
<b>Prepared by</b>		

## SPECIFICATION FEATURES

### Construction

- High impact, weather resistant housing and lens
- Available in bronze finish

### Optical

- Fixture produces up to 1270 lumens, equivalent light output up to 26W CFL Wall Pack
- Available in 3500K and 5000K

### Warranty

- Five-year limited warranty.

### Electrical

- Maintenance- free LEDs with 50,000 hours of life
- Fixture operating temperature range from -40°C to 40°C
- 12,000 cycle rated integral photo control included
- Electrical operating voltage 120VAC 50/60Hz
- cULus listed for Wet locations




## LED WALL PACK SERIES

Dusk to Dawn

## DIMENSIONS

### Dusk to Dawn

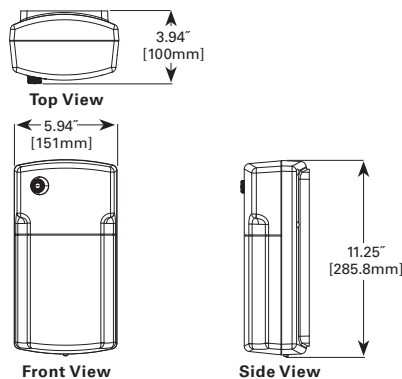

## ORDERING INFORMATION

Product Sample Number: WP1135LPC

<b>Series</b> WP = Wall Pack	<b>Wattage</b> 11 = 13W	<b>CCT</b> 35 = 3500K CCT 50 = 5000K CCT	<b>Lamp Type</b> L = LED	<b>Options</b> PC = Photo Control *This product is not sold without the photocontrol
---------------------------------	----------------------------	--	-----------------------------	--

### CERTIFICATION DATA

UL/CUL Wet Location Listed  
Lighting Facts® Approved


### TECHNICAL DATA

120V only  
-20°C to 40°C Temperature Rating  
External Supply Wiring 75° Minimum

## TECHNICAL INFORMATION

Model	Description	Voltage	Power	Delivered Lumens	Efficacy Lumen/ Watt	LED Color Temperature (K)	CRI
WP1135LPC	LED Dusk to Dawn Wall Pack	120V	13.8	1244	90	3500K	85
WP1150LPC	LED Dusk to Dawn Wall Pack	120V	13.6	1145	84	5000K	85

## PHOTOMETRICS

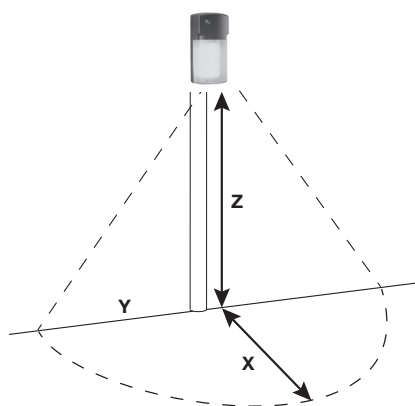

Mounting Height (Z)	Lumens	0.25 Fc Coverage Area					
		8		10		15	
Catalog Number		X	Y	X	Y	X	Y
WP1135LPC	1244	20.5	28	21.5	28	21	25
WP1150LPC	1145	20	28	20.5	28	20	21

**X** = Forward Throw  
**Y** = Wall Spread  
**Z** = Mounting Heights