

**SPEC SHEET**



Covering the same footprint as traditional HID garage and canopy lights but with the benefits from the latest in LED technology to save 85% on energy bills, lasts over 50,000-hour and doesn't require any bulb changes. Its hands-free installation feature makes the fixture easy to mount and comes fully gasketed and water-tight for outdoor and indoor installation.

LED TECHNOLOGY		LIGHTING PERFORMANCE	
LUMENS	2200 lm		
SYSTEM WATTAGE	20W		
MOUNTING	Ceiling Mount		
FREQUENCY	50-60 HZ		
THD	<20%		
PF	>0.9		
AMBIENT OPERATING RANGE	-20-40 °C		
INPUT VOLTAGE	120-277V		
EFFICACY	110 LM/W		
LED CHIP	Lumileds® LED		
DRIVER	YG® driver technology		
DRIVER EFFICIENCY	>85%		
STANDARD LIFETIME	>50,000 hours		
STANDARD WARRANTY	5 Years		
WATER PROOFING GRADE	IP65		
WEIGHT	4.40 lbs		
CCT	4000 Kelvin (Bright White)		
DIMENSIONS	9.13" x 8.86" x 4.65"		

LIGHT APPEARANCE (CCT)	
4000K	

\*All results according to IESNA - LM79-2008  
\*Light Output reported as total integrated lumens (light source & fixture)

**PRODUCT PERFORMANCE AT A GLANCE**

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
20W	19W	2200 lm	110 lm/w	≥80	100W

**HOUSING**

Die cast aluminum housing with UV-stabilized vandal-resistant polycarbonate prismatic lens.

**IP RATING & LISTINGS**

LED light engine is weather proof rated IP65.

DLC 4.2, cULus, FCC Certified

**OPTICS**

Wide Type V coverage with even distribution provides inviting security lighting.

**MOUNTING**

Fits to any standard junction box or direct to any surface via detachable mounting plate. Included hook for hands-free installation while making electrical connections. Also included multiple 1/2-in conduit entry plugs.


**FINISH**

Fade, weather, and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) textured polyester powdercoat finish. Paint is bronze.

**APPLICATION**


Its bright 2200 Lumens makes it ideal for entry-ways, parking areas, covered walkways, storage areas and loading docks.

**PRODUCT LINE DRAWING**

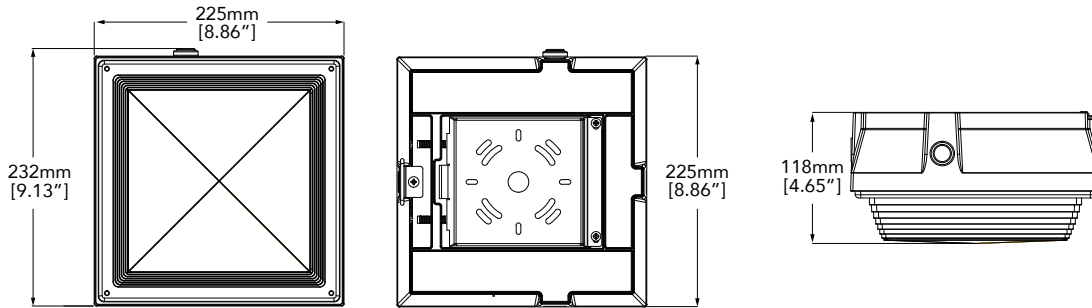

**SUGGESTED MOUNTING HEIGHT:**  
8-15FT. (2.4-2.6M)

**2D PHOTOMETRIC VIEW**

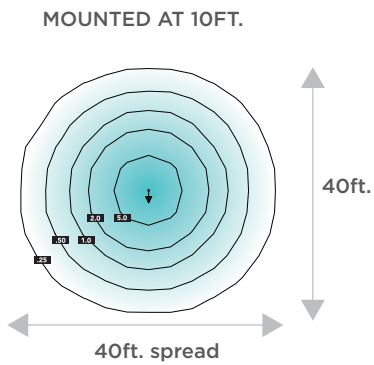

**APPLICATIONS**

