



Provides Crack Isolation, Waterproofing and Vapor Management Under Tile and Stone Floors

REDGARD[®] Uncoupling Mat

- Replaces 1/4" (6 mm) backerboard or a second layer of plywood under flooring installations – 1 roll replaces 3 to 4 sheets of backerboard
- Add 4.7" mm (120 mm) RedGard Seam Tape for waterproofing and vapor management
- Use with polymer modified thin-set mortar, as recommended for porcelain and other difficult to bond tiles
- Reinforced fleece layer locks in mortar for a strong bond





A waterproof, vapor-proof uncoupling membrane that can be used for crack-isolation in most tile, porcelain or natural stone installations, and can be applied over challenging substrates such as installation over green (young) concrete and single ply 19.2" (49 cm) o.c. wood framed floors. RedGuard® Uncoupling Mat is designed differently than bonded membranes. When exposed to excessive substrate movement it absorbs stress and preserves the surface and integrity of the tile. RedGuard Uncoupling Mat's bonding layers have reinforced fleece which locks mortar into the mat, ensuring strong, reliable installations.


Key Features

- Helps prevent cracks in tile and grout
- Use to replace 1/4" (6 mm) backerboard or a second layer of plywood in flooring installations - 1 roll replaces 3 to 4 sheets of 1/4" (6 mm) backerboard
- Use with polymer modified thin-set mortar - As recommended for bonding porcelain and other difficult to bond tiles
- Reinforced fleece bonding layer locks in mortar for a strong bond
- No fasteners required
- Mat made from 70% recycled pre-consumer waste, by weight

Available Size

1 M x 30 M Rolls

Apply Over Plywood or Concrete

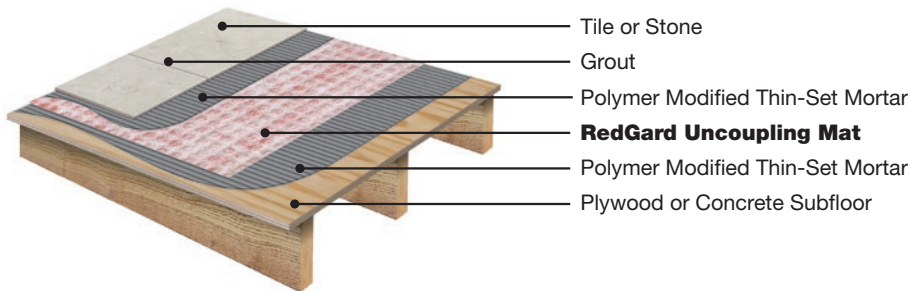

Waterproof and Vapor Proof Installation



To waterproof, use RedGuard® Seam Tape 4.7" (120 mm) over seams and changes in plane (sold separately).

Meets ANSI A138.1, and the performance requirements of ANSI A118.10 and A118.12.



Select a qualifying system of Prep, Set and Grout products and CUSTOM will warranty the tile installation for life, including tile, materials and labor. See website for complete details.



Available at:

*Footnote: When handling mortar, follow all safety precautions listed on package and safety data sheet including the use of gloves.

©2016 Custom Building Products. All rights reserved. The CUSTOM® logo and select product logos are registered trademarks of Custom Building Products, Inc. CUSTOM may make product modifications at any time without notice. Visit custombuildingproducts.com for updated technical data sheets and SDS information.

Custom Building Products
800-272-8786
custombuildingproducts.com

HDRGMSS 1/16N CB

