



PROFILE

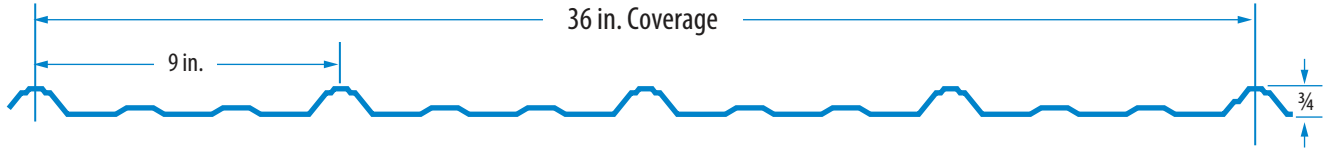

SPACING AND FASTENING DETAIL 24 in. O.C.




Eave, Ridge & Valley Schedule



Field Fastening Schedule

SIDELAP DETAIL

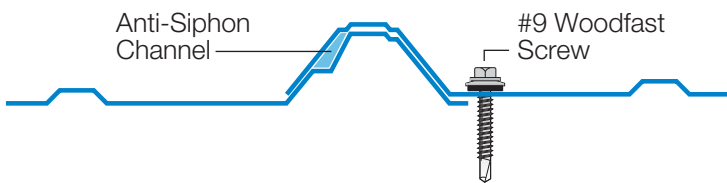

APPROVALS



26 Gauge



29 Gauge

Testing Data & Specifications

Accelerated testing of coating 2000 hours, per **ASTM G23**
 Salt Spray testing of coating 1000 hours per, **ASTM B117**
 Fire Testing, per **ASTM E108** or **UL 790**
 Wind Driven Rain test, per **TAS 100**

Code Approvals¹

UL Fire Resistant Directory **#R20735**
 Miami Dade Code Approval **NOA #: 14-0416.13** (26 ga. min.)
 Florida Building Code Approval **#FL-11175** (29 ga. min.)

1. Code Approval numbers may have changed since publication. For the most recent code approval numbers, contact Southeastern Metals' Technical Department or refer to the appropriate code agency.