



3/8 in. Drive Digital Display Click Style Torque Wrench


Owner's Manual Model No: H3DTWDIG

SAFETY RULES

1. STUDY THIS BOOKLET CAREFULLY BEFORE ATTEMPTING TO OPERATE THIS WRENCH.
2. Never apply more torque than the maximum scale reading.
3. This torque wrench is designed for manual tightening of threaded fasteners only. DO NOT USE IT AS A NUTBREAKER OR FOR ANY OTHER PURPOSE.
4. Over-torqued or defective fasteners and sockets may suddenly break. Ratchets that are improperly engaged, worn out, damaged, or over-torqued may slip or break. TO PREVENT INJURY, KEEP PROPER FOOTING AND BALANCE AT ALL TIMES. DO NOT USE THE WRENCH IN PLACES FROM WHICH YOU MAY FALL OR SLIP, OR AROUND OPERATING MACHINERY.
5. This wrench will not prevent you from applying more torque than set, it is not a torque limiting tool. The LCD display will flash "STOP" if you exceed either the lower or upper limit of intended use. At low settings the release is gentle and there usually is no audible 'click' signal. Learn how different amounts of torque 'feel', so you will reduce the possibility of damage and/or injury due to accidental over-torquing.
6. APPLY FORCE TO THE GRIP ONLY. DO NOT USE 'CHEATER BARS' (a piece of pipe placed over the hand grip).
7. There are no user-serviceable components inside the wrench. Disassembling the wrench or making any adjustments will result in the loss of accuracy, and will void the warranty.

OPERATING INSTRUCTIONS

Before adjusting the wrench to the desired torque setting, make sure that you are using the correct torque units. Torque values may be displayed in units of Inch Pounds, Foot Pounds, Newton Meters, or Centimeter Kilograms. Your Husky Digital Style Click Torque Wrench is calibrated in Foot-Pounds (default on the LCD display) and can be changed to other units as desired.

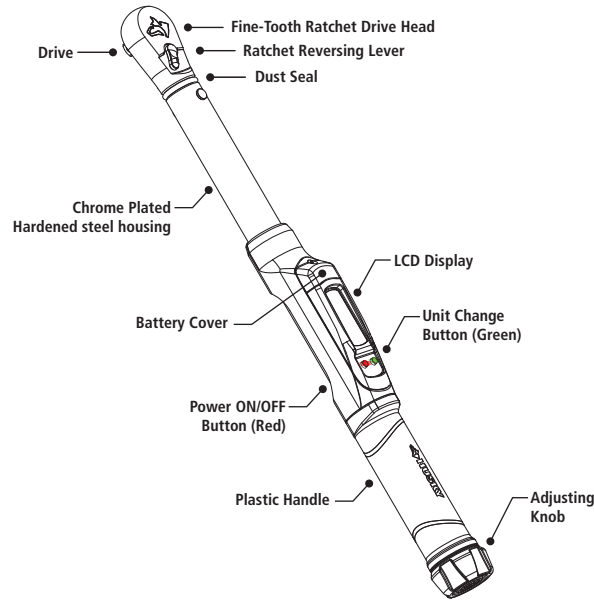

WARNING: DO NOT turn the adjusting knob either below the lowest scale reading or above the highest scale reading. The LCD display will show torque settings beyond the calibrated upper and lower limits of your torque wrench, these are intended for adjusting purposes only and are not within the calibrated range.

WARNING: DO NOT use the wrench when batteries are not installed or when batteries do not have sufficient power to operate the wrench

TO SET TORQUE

1. Press the **red** PWR button to turn the wrench on.
2. At initial power up, the LCD display will flash all icons twice and then show the current torque setting. When stored or not in use, the wrench should be set to less than 25% of the maximum capacity.

NOTE: The battery level indicator on the LCD display will indicate the remaining battery life.

3. Press the **green** UNIT button to toggle through desired units (ft-lb, in-lb, N-m, kg-cm)
4. Pull the adjusting knob out to unlock the adjusting mechanism.
5. While holding the adjusting knob unlocked, turn it clockwise to increase the torque, and counterclockwise to decrease torque. Keep turning until the desired TARGET torque reading is displayed on the LCD screen.

6. If during a torque setting adjustment the intended TARGET value is exceeded on the LCD display, the torque wrench should be first adjusted back to below the TARGET value, and then back up to the intended TARGET value.
7. Lock the setting by releasing and, if necessary, pushing the adjusting knob in. The knob can be turned slightly back and forth without changing the torque setting to assure proper engagement of teeth in the locking mechanism.
8. Press and hold the red PWR button for 2 seconds to turn the wrench off. **This torque wrench has an automatic shut off feature and will power down after 10 minutes of non-use.**
9. To turn the LED back light on or off, press and hold the green button for 2 seconds.

NOTE: The TARGET torque setting and units will be saved after shut off. If the torque is adjusted while the power is off, the correct torque target will be displayed at the power on screen .

TO APPLY TORQUE

1. Attach the proper socket or other attachment to the drive. Set the reversing lever of the proper direction of the operation.

NOTE: If special attachments are used, torque setting must be corrected in accordance with the directions given below in the extensions section.

2. Place the socket or attachment onto the fastener to be torqued.
3. Utilizing the ratcheting head, you may 'spindown' the fastener until resistance is felt.
4. Holding the wrench BY THE GRIP ONLY*, apply SLOW AND STEADY pull until a momentary release impulse or 'click' is felt. Release tightening pressure immediately when the release is felt.

WARNING: At low torque settings the release is gentle and there usually is no audible 'click' signal. Learn how the release feels BEFORE you torque to avoid accidental overtightening or damage.


*When using long sockets or extensions, the wrench may be supported at the head (only at the head) with only negligible effects on accuracy.

5. The wrench resets automatically and is ready for the next operation.

EXTENSIONS

At times, it is impossible or impractical to use regular sockets, (a good example being the tightening of threaded tubing connectors) and a special attachment must be utilized. Such attachments change the calibration of the torque wrench, and it is necessary to calculate the correct settings using the following formulas.

NOTE: Regular socket extensions which extend directly under the drive head along the axis of rotation of the ratchet do not affect the calibration of the torque wrench.

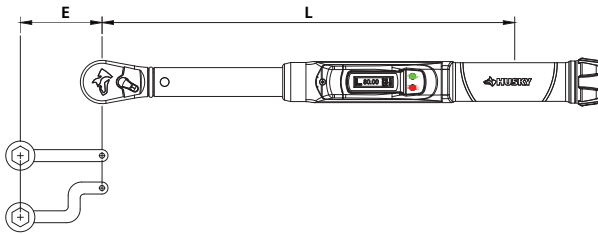

E – Effective Length of extension measured along the center line of the torque wrench

L – Lever length of the wrench – center of grip to center of drive


$$T(w) = T(E) \left(\frac{L}{L+E} \right)$$

$$T(E) = T(w) \left(\frac{L+E}{L} \right)$$

CARE AND MAINTENANCE

1. The Husky Digital Style Click Torque Wrench is a precision instrument and should be handled and stored with care. It should never be used as a hammer or pry bar.
2. DO NOT apply more torque than the rated capacity of the torque wrench. **DO NOT use it as a nut-breaker!!**
3. When the wrench is not in use, keep it set below 25% of capacity. If you leave the wrench set to over 50% of the wrench capacity for more than a 1-2 hours, set the wrench to the lowest setting and leave it for a 3-5 minutes before using it again.

4. The wrench is lubricated for life with a special lubricant. Do not oil it in any manner. The ratchet head may be lubricated as needed for smooth operation.
5. This wrench uses two (2) 1.5v (LR44 or equivalent) batteries.
6. To install and replace batteries as necessary, remove the battery cover by removing the screw on the battery cover, located to the left of the LCD. Place the new batteries with all three facing the same direction, the positive (flat) side facing the user. Replace the battery cover by tightening the screw for the battery holder.

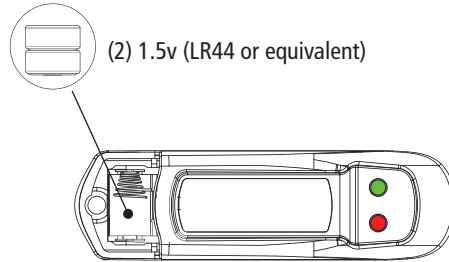

7. Remove batteries when wrench is stored for extended periods.
8. When not in use, store the torque wrench in its protective case.
9. The rubberized grip is not affected by petroleum products, but it will be damaged by Acetone and certain industrial solvents. It may be cleaned with a clean cloth wetted in mineral spirits or denatured alcohol. Never immerse the wrench or any portion of it in any liquid. Clean by wiping with a dry cloth.
10. Periodically, the wrench should be checked for accuracy. This should be done if the wrench is used frequently or is subjected to abnormal handling or storage. In assembly line type of usage, the wrench should be checked every 5,000 torque applications.
11. With the exception of the ratchet mechanism, the wrench is not user serviceable.

Instructions for attaching the lid to the case:

Upon opening the package the lid of the case is unattached and nested behind the case.

To attach, align the hinge pins on the lid with the holes on the top of the case.

Insert the first hinge pin into the first hole and then apply downward pressure to snap the second pin into the second hole.

Lid is now attached and can be latched for safe and secure storage or transport of the torque wrench.

SPECIFICATIONS

Operating Temperature Range	40°F - 110°F (5°C - 42°C)
Model No.	H3DTWDIG
Drive	3/8" Ratchet
Calibrated Capacity†	5-80 ft-lbs 60 – 960 in-lbs 6.78 – 108.48 N-m 69.1 – 1106.0 kg-cm
Increments& Display Resolution	0.1 ft-lbs 1.2 in-lbs 0.135 N-m 1.4 kg-cm
Dimensions	18" x 1.57" x 2.16"
Weight	3.2 lbs.
Lever Length*	18.0"

† LCD will display settings above and below the calibrated range, for adjusting purposes only.

*Center of drive to center of handle

ACCURACY: ±4% on clockwise or right-hand readings greater or equal to 20% of capacity. Complies with ASME standard B107.300-2010(B107.14) and International Standard ISO 6789

NOTE: The wrench will not actuate or 'click' when used in the counter-clockwise or left-hand direction

CERTIFICATION

This torque wrench was calibrated prior to shipment from the factory within tolerancelimits of +/-4% clockwise (right handed) accuracy of upper 80% range.

LIFETIME WARRANTY

If your Husky Digital Style Click Torque Wrench ever fails, bring it back and we will replace it Free. This warranty gives you specific rights, and you may also have other rights, which vary from state to state. For details visit your nearby store or call 1-888-HD-HUSKY

Made in China/Hecho en China
Distributed by / Distribuido por Home Depot, USA, Inc.
2455 Paces Ferry Rd., N.W., Atlanta, GA 30339
www.HuskyTools.com