


PRODUCT SPECIFICATIONS

# 1x4 Flatlight™ Luminaire Fixture

Replaces existing fluorescent 1x4 Luminaires

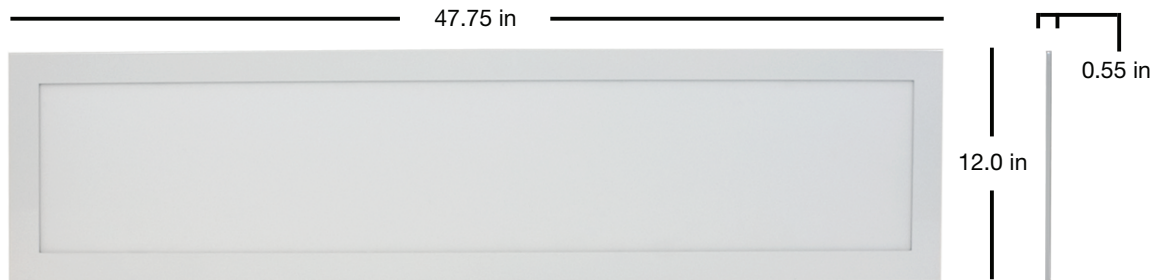


### ADVANTAGES

- Internal driver allows for TruFlat® Mounting
- Edge-lit LED provides a thin energy efficient light source with excellent uniformity
- 90° bezel edge
- Lasts 60%\* longer than standard troffer lighting
- Bright uniform light
- Low heat dissipation - reduce HVAC costs
- Low energy consumption
- Replaces fluorescent fixture and tube
- Environmentally positive - RoHS compliant
- Type IC Rated
- 5 year limited warranty

### APPLICATIONS

Suitable for dry and damp locations

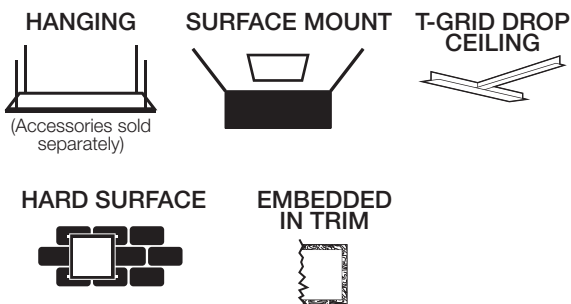

### SPECIFICATIONS

Model Number	FLT14C40MDUP44-A
Power	48W
AC Voltage, Frequency	120~277V, 50/60 Hz
Color Temp (nom.)	4000K
Operation Temp	- 20°C ~ 40°C
CRI	≥80
Lumen Output (min.)	4500 lm
Dimming	No
Lifetime Rating	50,000 Hrs

### PACKAGING

Weight (±0.5 lb)	10.2 lbs
Mounting plate	2.0 lbs
Size (L x W x H) (±0.1 in)	47.75 x 12.0 x 0.55 in
Box Dimensions	51.75 x 15.5 x 2.6 in
Gross Weight	14.6 lbs
UPC	8 55158 00316 4



### INCLUDED IN BOX

- Mounting plate
- Installation guide
- Installation bracket
- Junction box screws (2)
- Wire Nuts (3)
- Dry wall screws (4)
- Toggle bolts (4)
- Grounding wire

Contact Information 833-577-PIXI · [www.pixilighting.com](http://www.pixilighting.com)

\*Based on standard ballast average lifetime.

Specifications subject to change without notice. U.S. Patent Pending. © 2016 Pixi Lighting. All rights reserved. MA-PS-0120-1602

**Polar Candela Distribution**

