

BOTTOM-MOUNTED REACH-IN REFRIGERATOR SOLID DOOR




Features & Benefits

- ⊙ Stainless steel inside and outside, sealed interior floors and rounded cabinet corners for easy cleaning
- ⊙ Self closing doors with stay open feature, lifetime guaranteed door hinges
- ⊙ Digital temperature controller with automatic defrost system
- ⊙ Forced air refrigeration system
- ⊙ Adjustable, heavy duty shelves

Technical Specifications

Voltage/Frequency	110V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Exterior Finish	Stainless steel
Interior Finish	Stainless steel

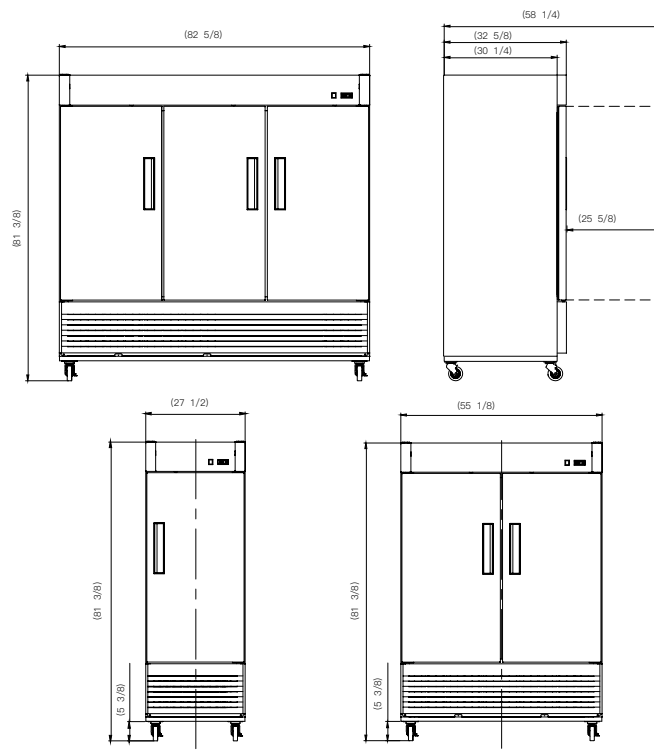

REFRIGERATOR													
MODEL NO	External Dimension(inches)			Packing carton (inches)			Temperature range(°F)	Compressor power(HP)	Gross weight (kg/LB)		#of shelves	Nema Config.	40FT (PCS)
	W	D	H	W	D	H							
D28R	27 1/2	32 5/8	80 3/8	29 1/8	34 1/4	84 3/8	33-41 °F	1/5	148	326	4	5-15P	39
D55R	55 1/8	32 5/8	80 3/8	56 3/4	34 1/4	84 3/8		1	247	546	8	5-15P	21
D83R	82 5/8	32 5/8	80 3/8	84 1/4	34 1/4	84 3/8		1	329	726	12	5-20P	13

Unit completely pre-wired at factory and ready for final connection to a 115/60hz single phase 15/20 amp dedicated outlet

BOTTOM-MOUNTED REACH-IN FREEZER SOLID DOOR




Features & Benefits

- ⊙ Stainless steel inside and outside, sealed interior floors and rounded cabinet corners for easy cleaning
- ⊙ Self closing doors with stay open feature, lifetime guaranteed door hinges
- ⊙ Digital temperature controller with automatic defrost system
- ⊙ Forced air refrigeration system
- ⊙ Adjustable, heavy duty shelves

Technical Specifications

Voltage/Frequency	110V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Exterior Finish	Stainless steel
Interior Finish	Stainless steel

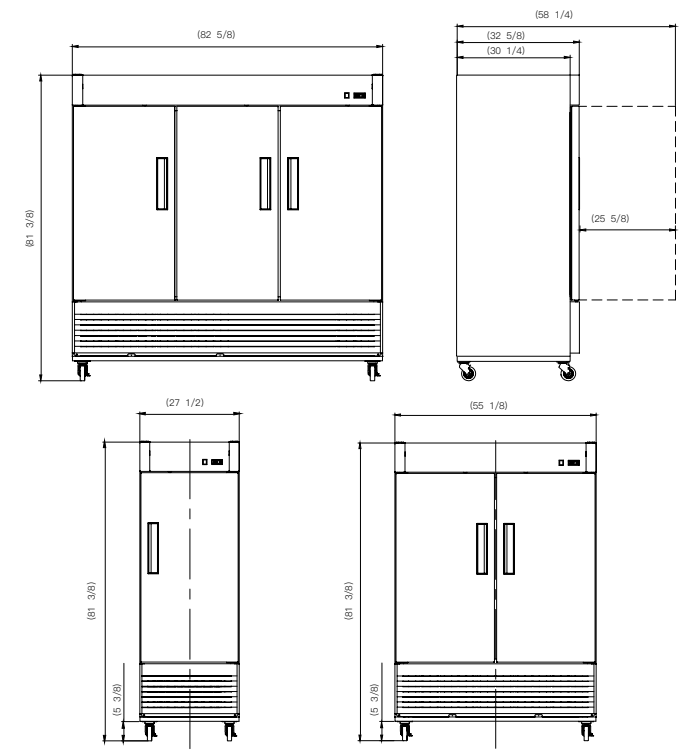

FREEZER														
MODEL NO	External Dimension(inches)			Packing carton (inches)			Temperature range(°F)	Compressor power(HP)	Gross weight (kg/LB)		#of shelves	Nema Config.	40HQ Container Certification	
	W	D	H	W	D	H								
D28F	27 1/2	32 5/8	80 3/8	29 1/8	34 1/4	84 3/8	0~ -8 °F	1/5	152	335	4	5-15P	39	
D55F	55 1/8	32 5/8	80 3/8	56 3/4	34 1/4	84 3/8		1 1/3	254	561	8	5-15P	21	
D83F	82 5/8	32 5/8	80 3/8	84 1/4	34 1/4	84 3/8		1/2+3/4	339	748	12	5-20P	13	

Unit completely pre-wired at factory and ready for final connection to a 115/60hz single phase 15/20 amp dedicated outlet