




Manufactured and Distributed by Scenery Solutions, Inc., 222 Grace Church Street, Suite 302 Port Chester, NY 10573

Questions call: 800-914-9835 admin@frameitall.com ©2009 Frameitall All rights reserved

Versailles Sunburst

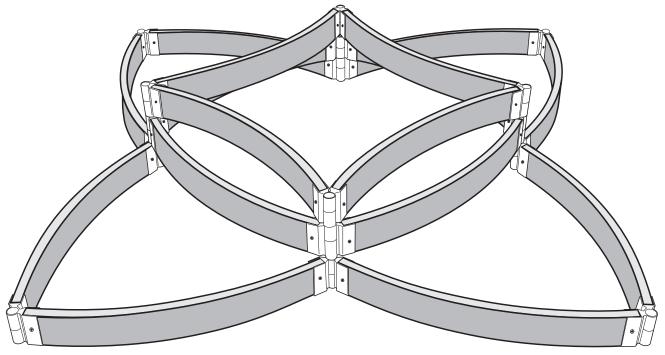

The Versailles Sunburst kit contains:

- 16 Curved Timbers
- 8 Stacking Joints (2 pack)

Introducing the 'Frame-It-All' Versailles Sunburst

For general assembly you can find the instructions in the 2 Pack of Frame-it-all joints.

ECO-friendly


The framework utilizes our Curved Composite Plastic Timbers. Manufactured from 40% wood fiber and 60% recycled polyethylene, the Eco-friendly durable composite wood grain plastic timbers never rot, warp or splinter. The cut-to-size Timbers connect to brackets with our patented Stacking Joints stakes.


Dimensions

Your Versailles Sunburst garden fits in a 10.5' X 10.5' area.

Installation Notes:

Before starting to assemble the Versailles Sunburst Garden, refer to the parts diagram to understand how to screw the brackets onto the timbers. Remove the Stacking joints from the plastic bags and lay out the parts. Each of the joints comprises a stake and two brackets plus screws needed.

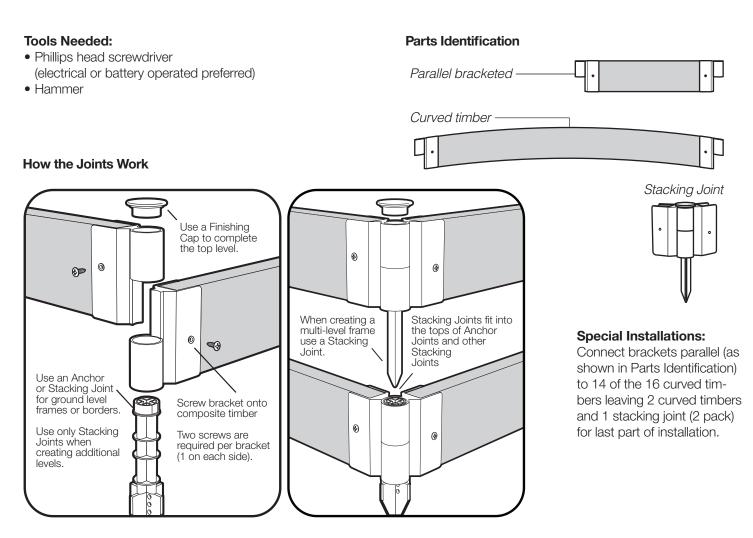

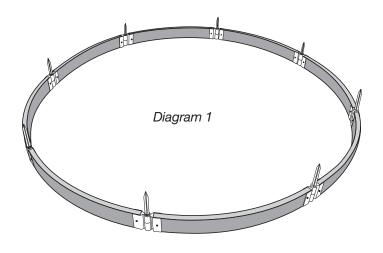

Next, push in every other timber to form a four leaf clover shape (Diagram 2).


Note: Do not secure stakes in ground just yet.

Level one (Diagrams 1 & 2)

Materials: 8 curved timbers, 8 stacking joints

Create a circle by connecting all of the bracketed timbers with the stakes upside down (A) so the timbers can be angled easily (Diagram 1).



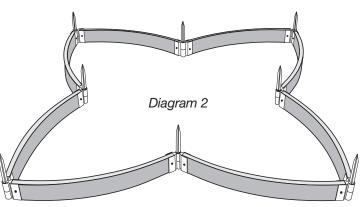


Level two (Diagram 3)

Materials: 4 curved timbers, 4 stacking joints

Before flipping the stake around and hammering into the ground to permanently pin the first level, line up the second level to make sure the bottom level is positioned properly. Once the second level is lined up, temporarily remove the second level pieces and hammer stakes through brackets to secure first level.

Once first level is secured, re-install second level, making sure the curve of the timber is facing outward (Diagram 3).

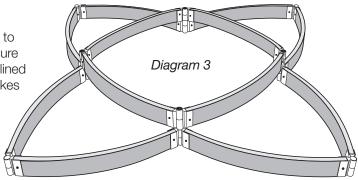

Level three (Diagram 4)

Because of the tight inward bends of the third level, it's important to first place two bracketed timbers (A) across from each other. Then place the brackets (not already installed on timbers) over the stakes (B) on the final two side pieces. Next, slide the final timber (C) into the brackets (it will be a tight fit). Once in place, screw the brackets to timbers to secure.

