

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

WC44 7/8" ID Copper Sweat Water Heater Connectors

Use: For use in exposed locations only to connect water heaters and other water connected devices to the water supply

Operating Specifications:

- Temperature:** 40° to 180° F (NSF61 maximum 82° C)
Pressure: water pressures up to 125 psi maximum



MATERIAL SPECIFICATIONS	
Tubing	C12200 copper
Plugs	Plastic


PART DIMENSIONS (Inches)					
Connector Length (±.25)					
Model	Dim.	12"	15"	18"	24"
WC44	A	11.25	14.25	17.25	23.25

Part Listing:

- WC44-12 3/4" Nom. Female Sweat (7/8" ID) x 3/4" Nom. Female Sweat (7/8" ID) x 12"
- WC44-15 3/4" Nom. Female Sweat (7/8" ID) x 3/4" Nom. Female Sweat (7/8" ID) x 15"
- WC44-18 3/4" Nom. Female Sweat (7/8" ID) x 3/4" Nom. Female Sweat (7/8" ID) x 18"
- WC44-24 3/4" Nom. Female Sweat (7/8" ID) x 3/4" Nom. Female Sweat (7/8" ID) x 24"

Listings & Certifications:

- IAPMO listed to ASME A112.18.6-2009/ CSA B125.6-2009 (File # 0452)
- CSA listed to ASME A112.18.6-2009/ CSA B125.6-2009 (File # 204593)
- CSA approved to California Health & Safety Code 116875 and Vermont Bill S.152 (Project # 2174785)

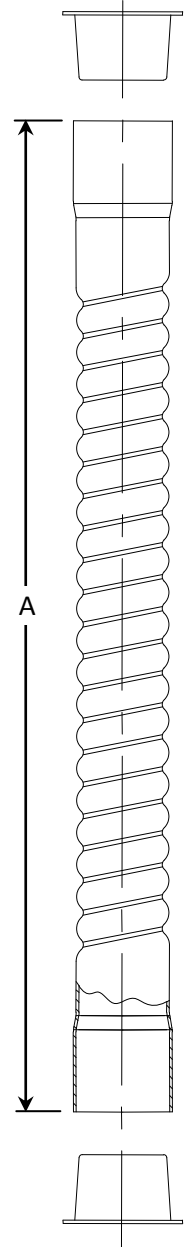

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.