

Features


- Brass construction
- Finished deck-mount or rim-mount installation only
- 1/2" quarter-turn washerless ceramic disc valves
- High-flow valving
- Eliminates the need for a transfer valve and transfer valve trim on the bath deck
- 11 gpm (41.6 lpm) to 12 gpm (45.4 lpm) flow rate at 45 psi (310.3 kPa)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1
- CSA International

**HIGH-FLOW VALVE SYSTEM WITH
DIVERTER
K-438**

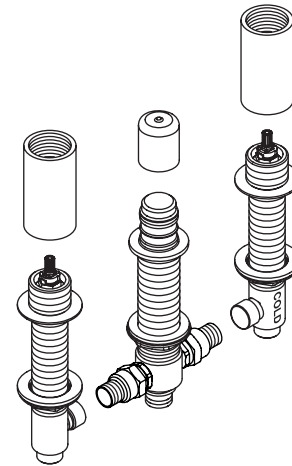

Colors/Finishes

- NA: None applicable

Specified Model


Model	Description	Colors/Finishes
K-438-K	High-flow valve system with diverter – 1/2" ceramic disc valves	<input type="checkbox"/> NA

Product Specification

The high-flow valve system with diverter shall be of brass construction. Product shall have an 11 gpm (41.6 lpm) to 12 gpm (45.4 lpm) flow rate at 45 psi (310.3 kPa). Product shall feature 1/2" quarter-turn washerless ceramic disc valves. Product shall eliminate the need for a transfer valve and transfer valve trim on the bath deck. Product shall be for finished deck-mount or rim-mount installation only. Valve system shall be Kohler Model K-438-K-NA.

Installation Notes

Install this product according to the installation guide.

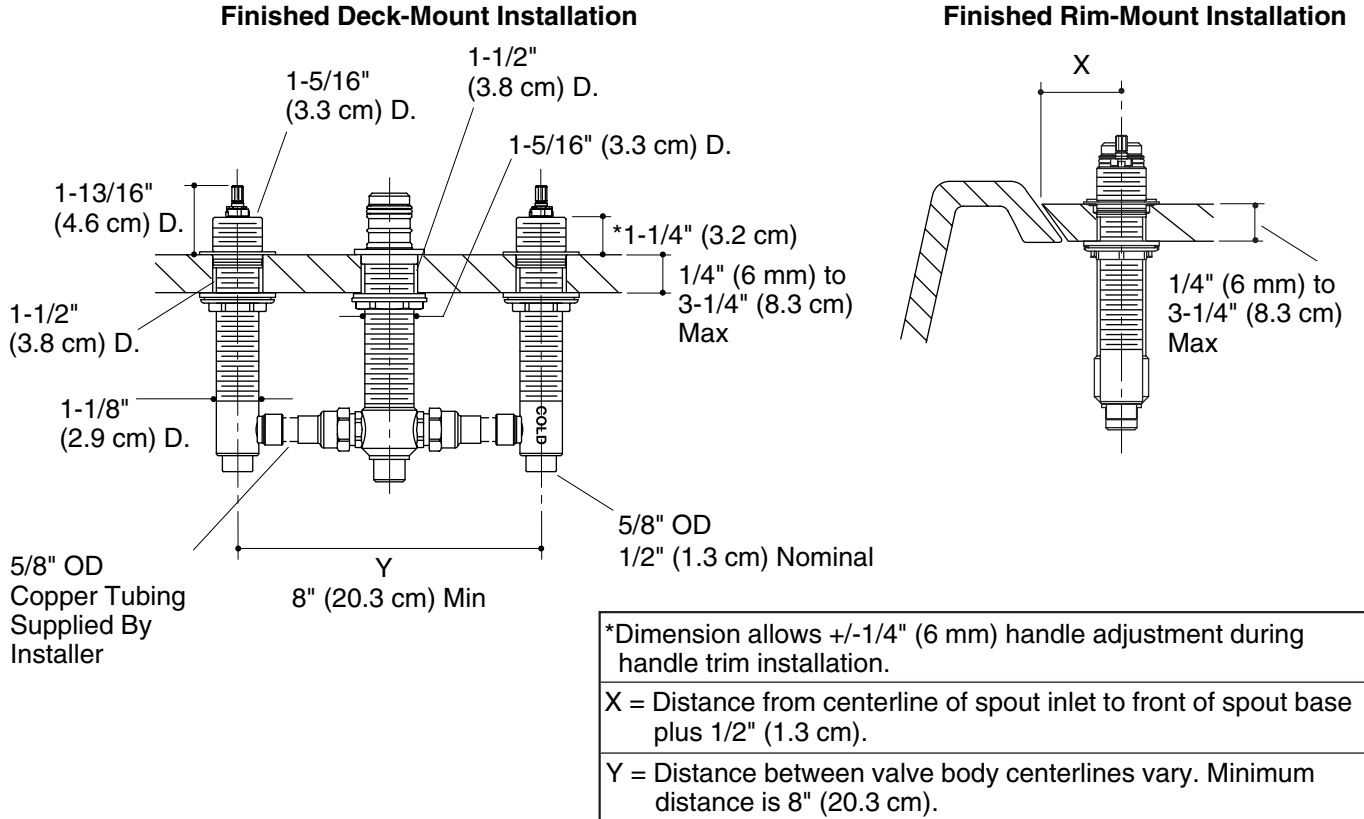

Product Diagram