

AQUILA - OAL

LED Area Light

The Aquila LED Area Light delivers high efficiency with maximum energy savings and advanced controls. Its low-profile die-cast aluminum housing has a modern, single piece design that provides low wind resistance. Suitable in parking lots, roadways, recreational or public venues, walkways, auto dealerships, campuses, and other commercial spaces. Quick to install, the Aquila is a versatile fixture with easily interchangeable precision lenses and four different wattages. Five mounting options and various pole selections are also available.

- High-impact, polycarbonate precision lenses in Type III and Type V distributions
- 3000K, 4000K, and 5000K CCTs
- Available in 60, 100, 150 and 200 watt
- Photocell and motion sensor options
- 0-10 VDC dimming
- Fine-textured bronze or white finish
- 120-277VAC



3000K
4000K
5000K



8143Lm
8344Lm
8545Lm



60W



138
142
145

3000K
4000K
5000K

12529Lm
12836Lm
13143Lm

100W

123
126
129

3000K
4000K
5000K

17379Lm
17622Lm
17869Lm

150W

117
119
120

3000K
4000K
5000K

25187Lm
25833Lm
26480Lm

200W

128
131
134



AQUILA - OAL

Arm & Pole Options




Adjustable Arm

- For use on square and round poles with adapter
- Retained wiring area in side access
- Adjustable from 90° to -90°
- Single-bolt tension and locking teeth secure positioning



Adjustable Wall Arm

- For wall mounting only
- Retained wiring area in side access
- Adjustable from 90° to -90°
- Single-bolt tension and locking teeth secure positioning
- Decorative cover plate for mounting screws

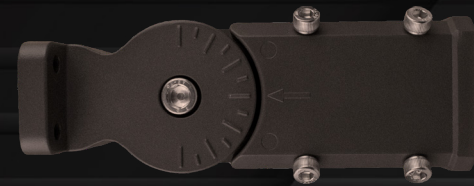

Slipfitter

- For use on square and round poles
- Adjustable from 90° to -90°
- Tenon mount (2.375" x 3")
- Single-bolt tension and locking teeth secure positioning



Straight Arm

- Side access wiring area
- For use on square and round poles with adapter



Trunnion

- For wall mounting only
- Adjustable in 45° increments from 90° to -90°
- Locking pin secures positioning



Pole

- 4" square and round poles
- 15- and 25-foot lengths
- Custom lengths available by request
- Mounting holes pre-drilled to customer specifications

OPL

3" & 4" Poles

The OPL are poles designed to fit the Aquila OAL area light fixtures as well as the Pollus OTL Poletop fixture.

- Straight steel construction with 3" round, 4" round, and 4" square options available
- General purpose pole for up to 12' (3" Pole) and up to 25' (4" Poles) mounting heights
- 3" Pole available in lengths of 8', 10', and 12'
- 4" Pole available in lengths of 15' and 25'
- Pole shaft is from weldable grade cold rolled, commercial quality carbon steel tubing conforming to ASTM-A500 grade B 11 gauge
- All welds conform to AWS D1.2 using ER70s-6 electrodes
- Grounding Provision incorporating a tapped 1/2"-13NC hole welded to frame

