ECL1-10-UNV-WH
LED Emergency Combo Light

Project

Catalog

Type

Product Description

The ECL Series LED Emergency Exit Combo features an attractive low profile design to fit any environment. This series is available in white and offers universal mounting with testing button, Ni-Cad battery with remote capabilities, and is damp location listed. The ECL Series generates only 1.2 watts per lamp head, making it a perfect energy savings solution.

Construction
Injection molded thermoplastic ABS housing
UL-94V-0 flame rating - Flame Retardant
Red or Green text options available
6" Letter Height
Double Face Configuration

Electrical
1.2 Watts per head
120-277V Dual Voltage Operation
LED Indicator Light & Push Button Test Switch
90 Min capacity on emergency mode
Damp Location Rated (0°C - 40°C)

Installation
Universal mounting plate with EZ quick connect

PRODUCT INFORMATION

Input Voltage (V):	120-277
Power Draw (W):	2.4
Emergency Battery:	90 minutes

3.75" (95 mm)
3.75" (95 mm)
8.0" (203 mm)
12" (305 mm)
2.25" (57 mm)
4.5" (114 mm)

DAMP LOCATION LOCATION
c(UL)us LISTED
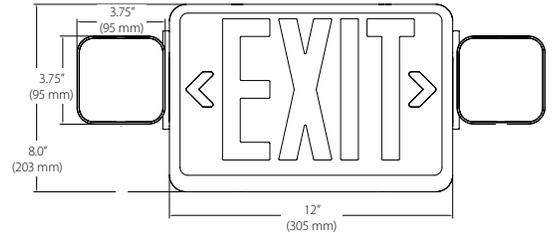
Ordering Information

Example: EXL1-10-UNV-WH-R-2

Series	Version	Voltage	Housing Color	Lettering
ECL1	**10** (1.0)	**UNV** (120-277V)	**WH** (white)	**R-2** (red) **G-2** (green) **R-2-R** (red w/remote)

NIC♦R® LED