



⚠ WARNING

Risk of electric shock

- Do not use in wet locations.
- Use indoors only.
- Turn power off before servicing -- see instructions.

Bulb may shatter and cause injury if broken

- Do not use excessive force when installing bulb.
- ### Risk of burn
- Do not mount fixture vertically
 - Allow bulb to cool before handling.

IMPORTANT SAFETY INSTRUCTIONS

This portable lamp has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug.

INSTALLATION PROCEDURES

- 1) Consult a local licensed electrician or electrical contractor if you are not sure about the installation.
- 2) DO NOT ATTEMPT TO INSTALL THE FIXTURE WHILE PLUGGED IN.
- 3) Select a suitable dry mounting location (for use indoors only). Make sure the mounting surface is capable of supporting the fixture.
- 4) Remove the lens/diffuser by lightly pressing the front edge while lifting upwards. The lens/diffuser should pop out easily. See Figure 1.
- 5) Remove the bulb by grasping the ends of the bulb and rotating until the bulb becomes loose. Pull straight out from the lamp holder. Be careful not to drop the bulb. See Figure 1.
- 6) Place the fixture in the location where it is to be mounted and mark the position of the keyholes with a pencil. This fixture can only be mounted horizontally. See Figure 4.
- 7) It is recommended that a 1/16" pilot hole be drilled in the mounting surface. If the mounting surface requires the use of wall anchors, drill a 1/8" pilot hole. Install the plastic anchors provided in the installation kit.
- 8) Drive the screws provided in the mounting hardware into the mounting surface until approximately 1/8" of space remains under the head of the screw. See Figure 2.
- 9) Align the keyholes in the fixture with the two screws and slide into place. See Figure 3.
- 10) Tighten the screws
- 11) Install the bulb and reinsert lens/diffuser.
- 12) Plug fixture into a 120VAC 60Hz outlet.

BULB REPLACEMENT INSTRUCTIONS

See the label on the fixture for replacement bulb type information. Do not replace with any other wattage of fluorescent bulb.

- 1) Turn the fixture off and allow bulb to cool before handling.
- 2) Remove the lens/diffuser by lightly pressing the front edge while lifting upwards. The lens/diffuser should pop out easily. See Figure 1.
- 3) Remove the bulb by grasping the ends of the bulb and rotating until the bulb becomes loose. Pull straight out from the lamp holder. Be careful not to drop the bulb. See Figure 1.
- 4) Grasp the replacement bulb in the same manner and reinsert into the lamp socket. Do not use excessive force when installing bulb.

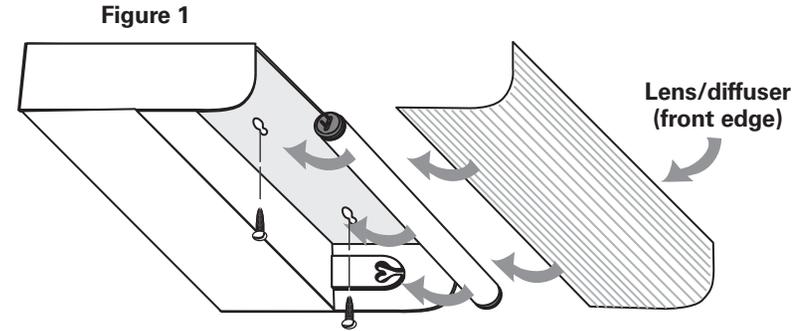


Figure 2




Figure 3





Figure 4



Plastic Fluorescent Undercabinet Fixtures w/ Polarized Plug (UCF013)

Made in China

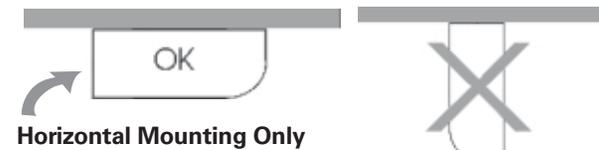

is a trademark of General Electric Company and is used under license to Jasco Products Company LLC, 311 N.W. 122nd Street, Oklahoma City, OK 73114 www.jascopeproducts.com



Replacement bulb:
F15T8WW- 15 watt 18 inches