

Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

DESCRIPTION

- Versatile, hands-free convenience in the kitchen
- Allows users to control the faucet in 3 unique ways: Wave Sensor, Ready Sensor and familiar handle
 Powered by 6 AA batteries or optional AC adapter with power splitter

- High arc spout provides height and reach to fill or clean large pots while pull down wand provides the maneuverability for cleaning or rinsing
- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
 Metal construction with various finishes identified by suffix
 Pulldown spray with 68" braided hose

- Flexible supply lines with 3/8" compression fittings connect directly to supply stop
- Spout uses push-fit hose connections
- Includes liquid soap dispenser
 OPERATION

- Temperature controlled by 100° arc of handle travel
 Operates with less than 5 lbs. of force
 Operates in stream or spray mode in the pulldown or retracted position
- Spout rotates 100 degrees
 When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi Operates in eco-performance mode by default in aerated and spray stream


CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets Georgia SB370 requirements
 Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

- Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser
 Syear warranty electronic operation defects to the original consumer purchaser
 Syear warranty against leaks, drips, finish defects if used in commercial installations
 1 year warranty against electronic operation defects if used in commercial installations

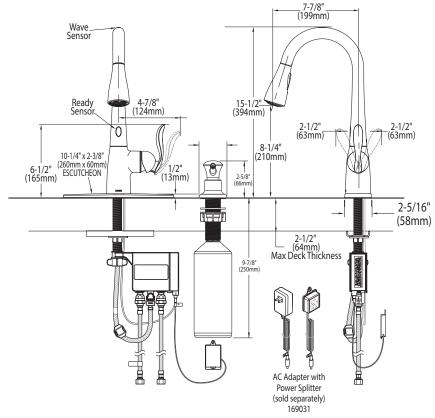

CRITICAL DIMENSIONS

(DO NOT SCALE)

Specifications



MotionSense™ **Single-Handle High Arc Pulldown Kitchen Faucet**


Models: 87350E SERIES

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 OR 3 HOLES, 1-1/2" (38mm) MIN. DIA.






Close up view of Control Box



Battery Holder



Rev. 3/16



Buy it for looks. Buy it for life.®

- Versatile, hands-free convenience in the kitchen
- Allows users to control the faucet in 3 unique ways: Wave Sensor, Ready Sensor and familiar handle Powered by 6 AA batteries or optional AC adapter with power splitter
- Reflex[™] pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with various finishes identified by suffix
- Pulldown spray with 68" braided hose
- Valve flexible supply lines with 3/8" compression fittings Spout uses push-fit hose connections
- High arc spout provides height and reach to fill or clean large
- pots while pull down wand provides the maneuverability for cleaning or rinsing
- ncludes liquid soap dispenser

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position
- Spout rotates 100 degrees
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

FLOW

Flow is limited to 1.5 gpm (7.6 L/min) at 60 psi

Wave Sensor

Ready Sensor

10-1/4" x 2-3/8"

(260mm x 60mm) ESCUTCHEON

6-1/2" (165mm)

30-11/16"

(779mm)

32-3/4" (832mm)

CARTRIDGE

• 1255™ Duralast™ cartridge for Single-Handle Faucets

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9 & 372 Meets Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

- Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser 5 year warranty electronic operation defects to the original consumer purchaser 5 year warranty against leaks, drips, finish defects if used in commercial installations

- 1 year warranty against electronic operation defects if used in commercial installations

4-7/8" (124mm)

(13mm)

(76mm)

4-1/2"-(114mm)

Specifications



MotionSense™ **Single-Handle High Arc Pulldown Kitchen Faucet**

Models: 87350E SERIES


NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 OR 3 HOLES, 1-1/2" (38mm) MIN. DIA.




(63mm)



Close up view of Control Box



Battery Holder



CRITICAL DIMENSIONS

7-7/8" (199mm)

2-1/2

2-1/2" (64mm) Max Deck Thickness

AC Adapter with **Power Splitter** (sold separately)

169031

15-1/2["] (394mm)

8-1/4" (210mm)

(DO NOT SCALE)