


### Features

- Acrylic
- Reinforced with fiberglass (FRP)
- Molded-in floor pattern
- Coordinating Memoirs® Suite
- 48" (121.9 cm) x 34" (86.4 cm) x 4-1/2" (11.4 cm)

### 48" (121.9 cm) ACRYLIC ONE-PIECE SHOWER RECEPTOR K-9549

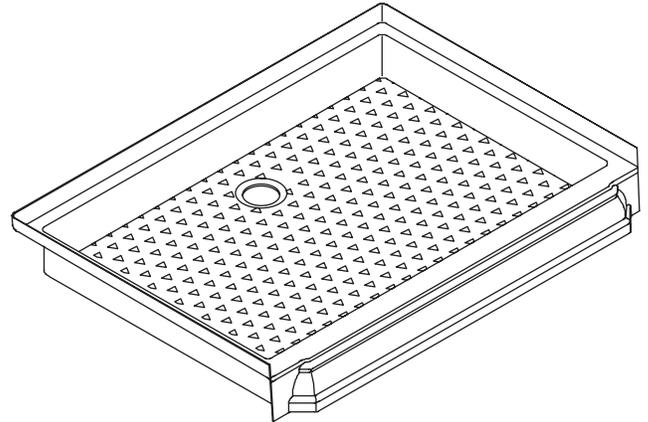

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASTM E162
- ASTM E662
- IAPMO/UPC
- CSA International
- CSA B45.0
- CSA B45.5

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes		
K-9549	Receptor	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Recommended Accessories				
K-9132	Shower drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
Refer to Fixtures Price Book for shower door selections, glass options, and color information.				

### Product Specification

The one-piece shower receptor shall be 48" (121.9 cm) in length, 34" (86.4 cm) in width, and 4-1/2" (11.4 cm) in height. The shower receptor shall be made of acrylic reinforced with fiberglass (FRP). The receptor shall have molded-in floor pattern and be part of the coordinated Memoirs Suite. The shower receptor shall be Kohler Model K-9549-\_\_\_\_\_.

## Technical Information

Fixture:	
Weight	35 lbs (15.9 kg)
Drain hole	3-3/8" (8.6 cm) D.
Configuration	one-piece

## Installation Notes

Install this product according to the installation guide.

**IMPORTANT!** When installing this unit with Kohler Portico shower doors, the receptor will need to be recessed a minimum of 1/2" (1.3 cm) in from the water-resistant wall material to ensure proper door placement.


The fixture is not drilled for supply fittings.

Shimming may be required to level the fixture.

Stud opening tolerance is + 1/4" (6 mm), - 0" (0 mm).

When fire rated construction is specified, dimensions are to the inside of the fire-rated wall.

Some shimming between stud frame and fixture may be required.

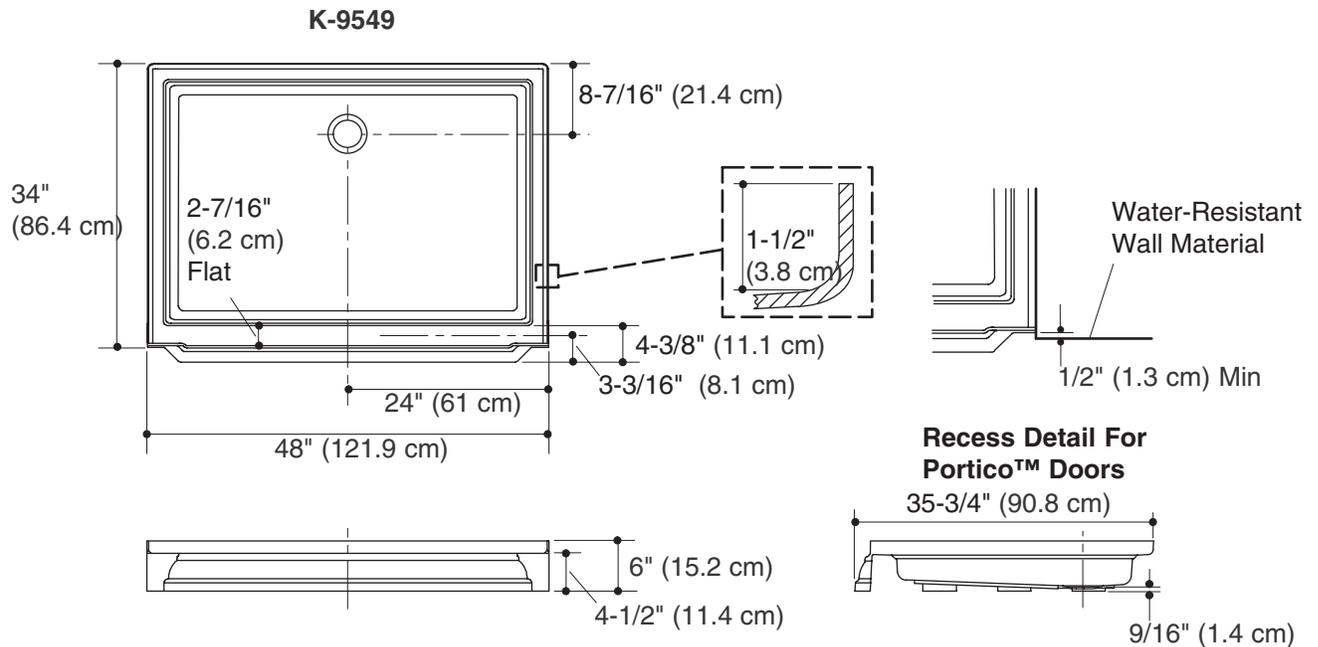

## Product Diagram