

JUMPKING®

Trampoline Tie Down Anchor Kit

THANK YOU FOR PURCHASE JUMPKING® TRAMPOLINE TIE DOWN ANCHOR KIT. PART # ACC-AK

This kit is designed to be used on any round or rectangle trampoline. It has two basic purposes. For certain types trampolines it will enable the owner to move the trampoline without the vertical leg pieces separating from the frame. It is also a tie down system for your trampoline. JUMPKING® has tried to provide a utilitarian tie down anchor kit for a broad range of applications. JUMPKING® cannot anticipate every situation or condition where this kit is used. Differing soil and weather conditions could influence the effectiveness of any installation using this kit. JUMPKING® does not state, grant or imply any guarantees as to performance or appropriateness of this JUMPKING® Tie Down Anchor Kit, or any of its components, in any application whatsoever.

Your kit should contain:

- (4) Four tie down straps
- (4) Four 13" auger stakes

If you find that there is a part missing or defective, contact:

JUMPKING®
3970 Lindbergh Drive
Addison, TX 75001

Customer Hot Line: 1-877-927-8777 (8am to 5pm)
(Central Standard Time)
www.jumpking.com



INSTALLATION

Make sure the area is free of underground utilities (electrical, gas, phone, water, sprinkler) before installing the auger stakes. The installation of this kit should be performed by an adult.


The following procedures primarily apply to round trampolines with (4) four support structures.

Each tie down strap consists of two loop straps that are joined with buckles. The larger loop goes around the toprail and under the leg bottom. The smaller loop goes through the auger stake "eye" and ties the trampoline to the ground.

Install an auger stake at the mid point of each leg, about 6 inches from the outside of the leg base, by rotating the stake and pushing it into the ground. The ground should be soft, and it may be necessary to pre-soften this area with some water before beginning. A tool, such as a large screwdriver may be placed through the eye of the stake to form a "T" handle to assist in turning the stake. We recommend that gloves be worn during this process.



1. At the leg of the trampoline, run the longer loop strap around the top rail and under the bottom of the leg piece.
2. The strap comes up and through the non-toothed opening in the buckle.
3. Then slides back through the next non-toothed opening. Pull as much slack as you can out of the strap at this time.
4. Slide the strap back up through the toothed opening. Cinch tightly.
5. Slide the strap back through the first opening to complete this strap.

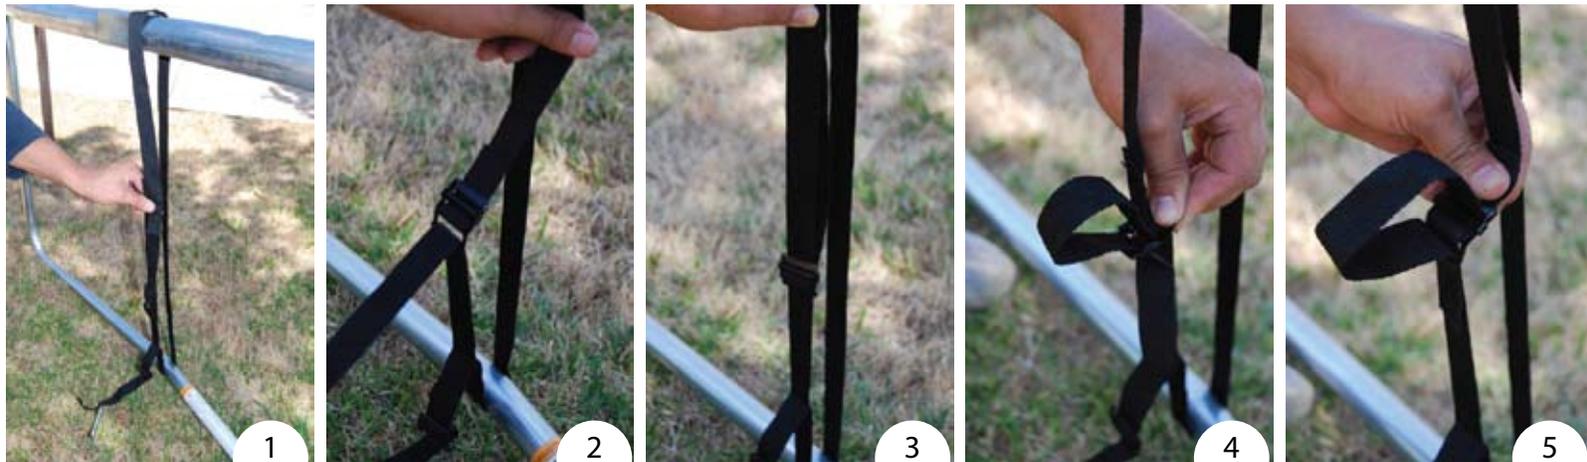

6. Thread the smaller loop strap through the "eye" of the stake.
7. Slide the strap up through the non-toothed opening directly under the toothed opening.
8. Next slide the strap through the toothed opening and cinch tightly.

Repeat these steps for the remaining tie downs.



Rectangle and Other Trampolines

The straps and auger stakes can be used as a (4) four point trampoline tie down system on most other trampolines. This ties the frame to the ground. In this case, use the large loop to go around the top rail of the frame close to the leg. The length of the strap can be adjusted using the buckle. The small loop and auger stakes are installed as discussed above. Make sure all straps are tight and secure.