

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE — Replaces up to 50W quartz halogen. Provides general illumination for outdoorspaces in residential and light commercial applications. Ideal for landscape or accent lighting.

CONSTRUCTION — Rugged cast-aluminum, corrosion-resistant rear housing and lamp heads thermally isolate the LEDs and driver promoting long life.

The adjustable head allows for tool-free directional aiming. Includes a 3' cord and plug.

OPTICS — High-performance LEDs produce 674 lumens and maintain 70% of light output at 50,000 hours of service. (LED lifespan based on IESNA LM-80-08 results and calculated per IESNA TM-21-11 methodology.)

The tempered glass lens seals out the elements and protects the LEDs.

4000 K CCT

See Lighting Facts Label for specific fixture performance.

ELECTRICAL — Dusk-to-dawn photocell automatically turns light on at dusk and off at dawn for convenience and energy savings.

120V driver operates at 60Hz, 9.0 watts.

Operating temperature -30°C to 40°C.

INSTALLATION — Designed for ground-mounting with stake installed and wall-mounting with stake removed.

All mounting hardware included.

LISTINGS — UL/C-UL certified to US and Canadian safety standards. Wet location listed.

Tested in accordance with IESNA LM-79 and LM-80 standards.

WARRANTY — 5-year limited warranty. Complete warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Actual performance may differ as a result of end-user environment and application.

Note: Specifications subject to change without notice.

Outdoor General Purpose

Portable Spotlight



ORDERING INFORMATION


For shortest lead times, configure product using **bolded options**.

Example: OSTLLED 120 P BL

OSTLLED		120	P	BL
Series	Color temperature (CCT) ¹	Voltage	Controls	Finish
OSTLLED	(blank) 4000 K	120 120V	P Dusk-to-dawn photocell	BL Black

Notes

¹ Nominal correlated color temperature (CCT) per ANSI C78.377-2008.

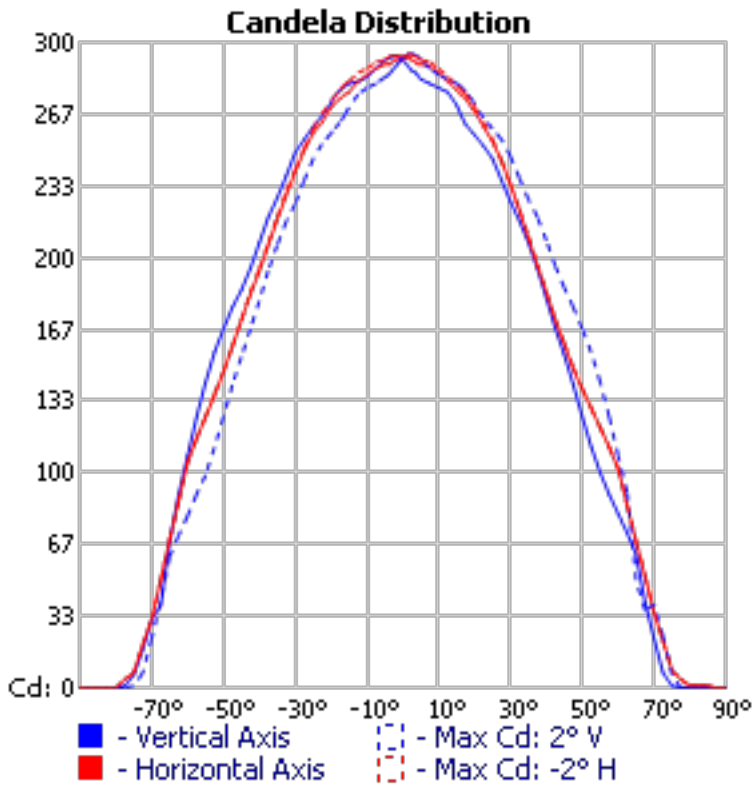

LED
lighting facts[®]
Lithonia Lighting

A Program of the U.S. DOE

Light Output (Lumens)	674
Watts	9.01
Lumens per Watt (Efficacy)	74

Color Accuracy	83
Color Rendering Index (CRI)	

Light Color
Correlated Color Temperature (CCT) **4071 (Bright White)**

Warm White
Bright White
Daylight

2700K
3000K
4500K
6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: NJSM-VK2UN2 (2/5/2014)
Model Number: OSTLLED 120 P BL
Type: Luminaire - Path/Step/Rail