

TWO HANDLE LAVATORY FAUCET

SPECIFICATION SHEET

Model #:	
Specific Features:	
Project Name:	
Submitted For:	
Date:	

- Lever Handles
- J Style Rigid Spout
- · 4-1/16" Reach, 3-11/16" From Deck to Aerator

Commerce, CA

DMSPL-7572/REV. 10.17

- · Ceramic Disc Cartridges
- 3-Hole 4" Installation
- · Brass Pop-Up Drain Assembly
- With 1.2 GPM Flow Rate

#L-7572 SHOWN ADA



Model #	Features	Finish	
L-7572*		СР	
L-7572-BN*		PVD BN	
L-7572-ORB*		ORB	
L-7572B*	Builder Tract Pack	СР	
L-7572B-BN*	Builder Tract Pack	PVD BN	

Olympia products are engineered and manufactured to meet the following standards and codes:


ASME A112.18.1 ANSI A117.1

ANSI / NSF 61, SECTION 9
CONTAINS NO MORE THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT

* Aerator limited to 1.2 GPM Flow Rate * E0.5 - 0.5 GPM Flow Rate Aerator Available: upon request Note:

Optional 1" Shank Extensions (OP-490051)

Available.

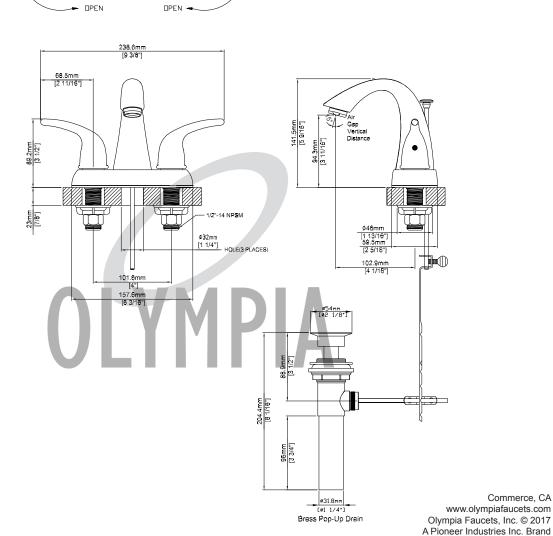

) CLOSE