Measure Your Doorway

Measuring

After selecting the style of door you want, measure your opening and visit The Home Depot® for availability and purchase.

Height Measure for height (H) from the sill to the underside of the exterior trim at the top of the door. Record your door height.

Width

Measure the width at the ton (W1) center (W2) and bottom (W3) of the door opening. Use the shortest measurement if they vary.


W2 Record your door width.

For double doors, order 2 doors and a double door kit.

Door Size

Use the charts below to select the appropriate door size. Be sure to verify rough opening requirements for the door you select.

Record the door size you need.

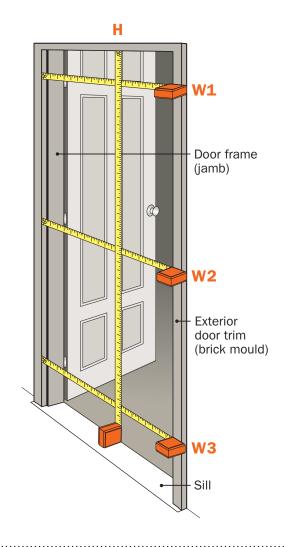

Storm Door Size Charts

Verify Rough Opening Requirements

Select a storm door and then verify the minimum space requirements on your existing door frame to make sure that your new storm door will fit.

DIMENSION A

■ Minimum of ¾" (1.91cm) for all storm doors; except the 75 Series and Forever® Storm Doors which require 1" (2.54cm).

DIMENSION B ■ Minimum of 1" (2.54cm) required

-	iviinimum	OT 2 ½"
	(6.35cm)	required

INTERIOR ENTRANCE DOOR (closed position) Exterior door trim (brick mould) Storm Door Opening Width Measure from inside face of brick mould

Andersen® and EMCO® Storm Doors

SIZE*	WIDTH RANGE**	HEIGHT RANGE
30"	29 ⁷ /s" to 30 ³ /s"	
32"	31 ⁷ /8" to 32 ³ /8"	80" to 80 ⁷ / ₈ "
34"	33 ⁷ /8" to 34 ³ /8"	for all door sizes*
36"	35 ⁷ /s" to 36 ³ /s"	

EMCO° Forever° Storm Doors

SIZE*	WIDTH RANGE	HEIGHT RANGE
30"	30" to 30 ³ /8"	80" to 80 7/e"
32"	32" to 32 ³ /8"	
36"	36" to 36 ³ / ₈ "	

* The actual door slab dimensions will be approximately 3/4" less than the door size (e.g., on a 36" door, the slab is 35 1/4" wide).

Need a custom size?

DOOR SIZE	ROUGH OPENING WIDTH RANGE	ROUGH OPENING HEIGHT RANGE
Andersen	27 ⁷ /8" to 38 ³ /8"	72" to 84 ⁷ /8"
Andersen XL	27 ⁷ /8" to 42"	72" to 96"
EMCO	27 ⁷ /8" to 38 ³ /8"	75" to 84 ⁷ /s"
EMCO XL	38 ⁷ /8" to 42"	79" to 91"

To qualify for Andersen Custom XL sizing, only one

- of the following conditions must be met:
- ·Width of opening must exceed 38 3/8" or · Height of opening must exceed 84 $^{7}/\mathrm{8"}$
- Andersen Custom XL must be specified RH or LH. Ask an associate for details. For openings up to 1" wider than those listed, order optional Z-Bar Extender kit. Kits are also available for double-door installation

For more information visit stormdoors.com

"Andersen" and all other marks are trademarks of Andersen Corporation and its subsidiary. Andersen Storm Door Division is a wholly owned subsidiary of Andersen Corporation that manufactures the storm doors in this brochure and supports the limited warranties. "The Home Depot" and The Home Depot logos are trademarks of Homer TLC, Inc.