

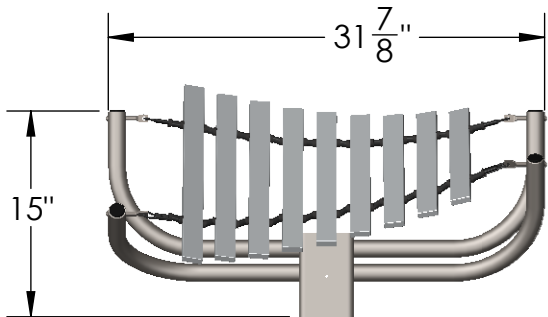
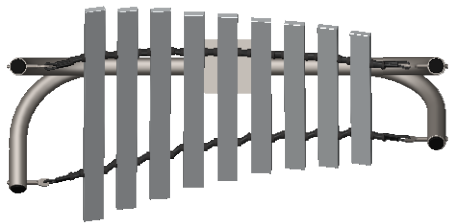


ARIA

The sleek-looking 9 note Aria is a non-resonated instrument with aluminum keys and a powder coated steel frame. Mounted on just one post. This instrument sounds like a delightful breath of fresh air.


C MAJOR PENTATONIC

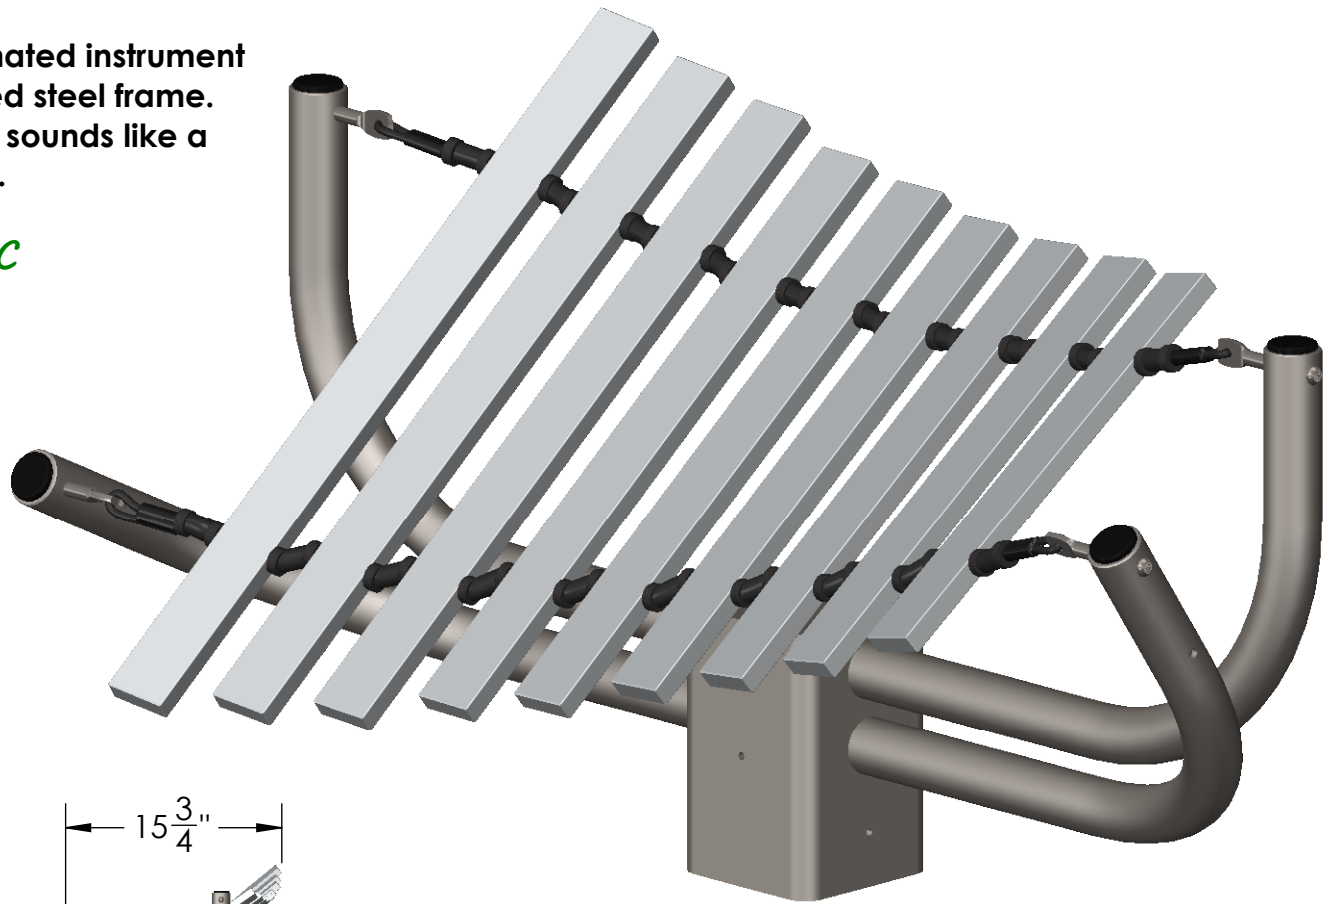

MOUNTING OPTION IDENTIFICATION:

This instrument is offered with various mounting options. Identify your option below and follow installation instructions on the following sheets.

Recycled Post In-Ground
Sheet 3 of 5

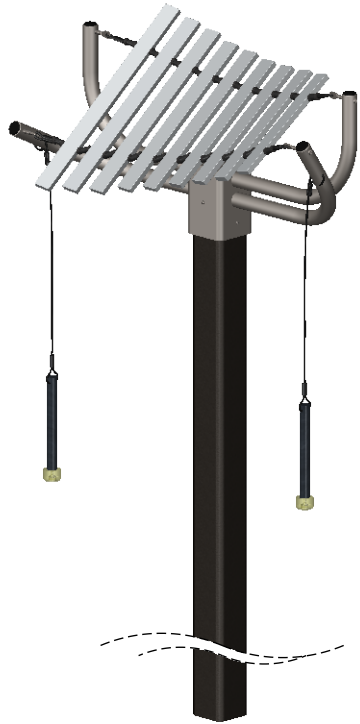


Parts List:

- Aria Instrument Assembly (1)
- In-Ground Post (1)
- 2" Tamper-Resistant Screw (5)
- Security Driver (1)

Weights:

Boxed Instrument Weight, lbs.
Boxed Post Weight, 28 lbs.

Steel Post In-Ground
Sheet 3 of 5

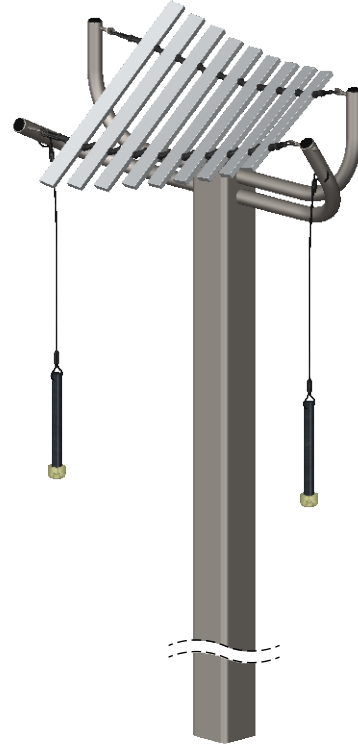


Parts List:

- Aria Instrument / In-Ground Post Assembly (1)

Weights:

Boxed Instrument / Post Weight, lbs.

Recycled Post Surface Mount
Sheet 4 of 5

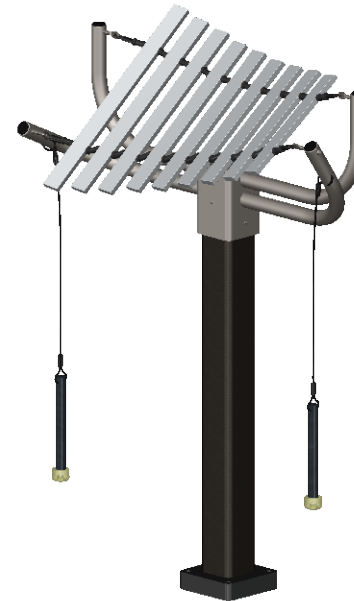

Parts List:

- Aria Instrument Assembly (1)
- Surface Mount Post (1)
- 2" Tamper-Resistant Screw (5)
- Security Driver (1)
- $\varnothing 3/8"$ x 5" Anchor Bolt (4)
- Plastic Anchor Cap (4)

Weights:

Boxed Instrument Weight, lbs.
Boxed Post Weight, 28 lbs.

Steel Post Surface Mount
Sheet 4 of 5



Parts List:

- Aria Instrument / Surface Mount Post Assembly (1)
- $\varnothing 3/8"$ x 3 3/4" Anchor Bolt (4)
- Plastic Anchor Cap (4)

Weights:

Boxed Instrument / Post Weight, lbs.

RECYCLED AND STEEL POST IN-GROUND INSTALLATION PROCEDURES

Step 1: Excavate one 10" diameter hole, 36" deep at the installation location. Contractor can modify post to desired height.

Post Length = Frost Depth (36" Recommended) + Finished Height (Refer to Height Guideline)


Step 2: Lower the post into the excavated hole.

Step 3: Refer to sheet 5 for installation of instrument to post.

(The Steel In-Ground option does not require assembling the instrument to the post, as the post and instrument are one unit)

Step 4: Verify the correct placement, levelness, plumbness, and finished height of the instrument. Also check for sufficient clearance around the instrument. A 36" radius is recommended around the instrument for wheelchair accessibility, however this is not required for instrument function. Instrument may be installed next to a wall or in a variety of different configurations.

Step 5: Last pour concrete around the post. It is recommended to brace the instrument to hold it rigid while the concrete cures. Leave to set according to the concrete manufacturers guidelines. Approximately (2) 80lb. bags will be needed.

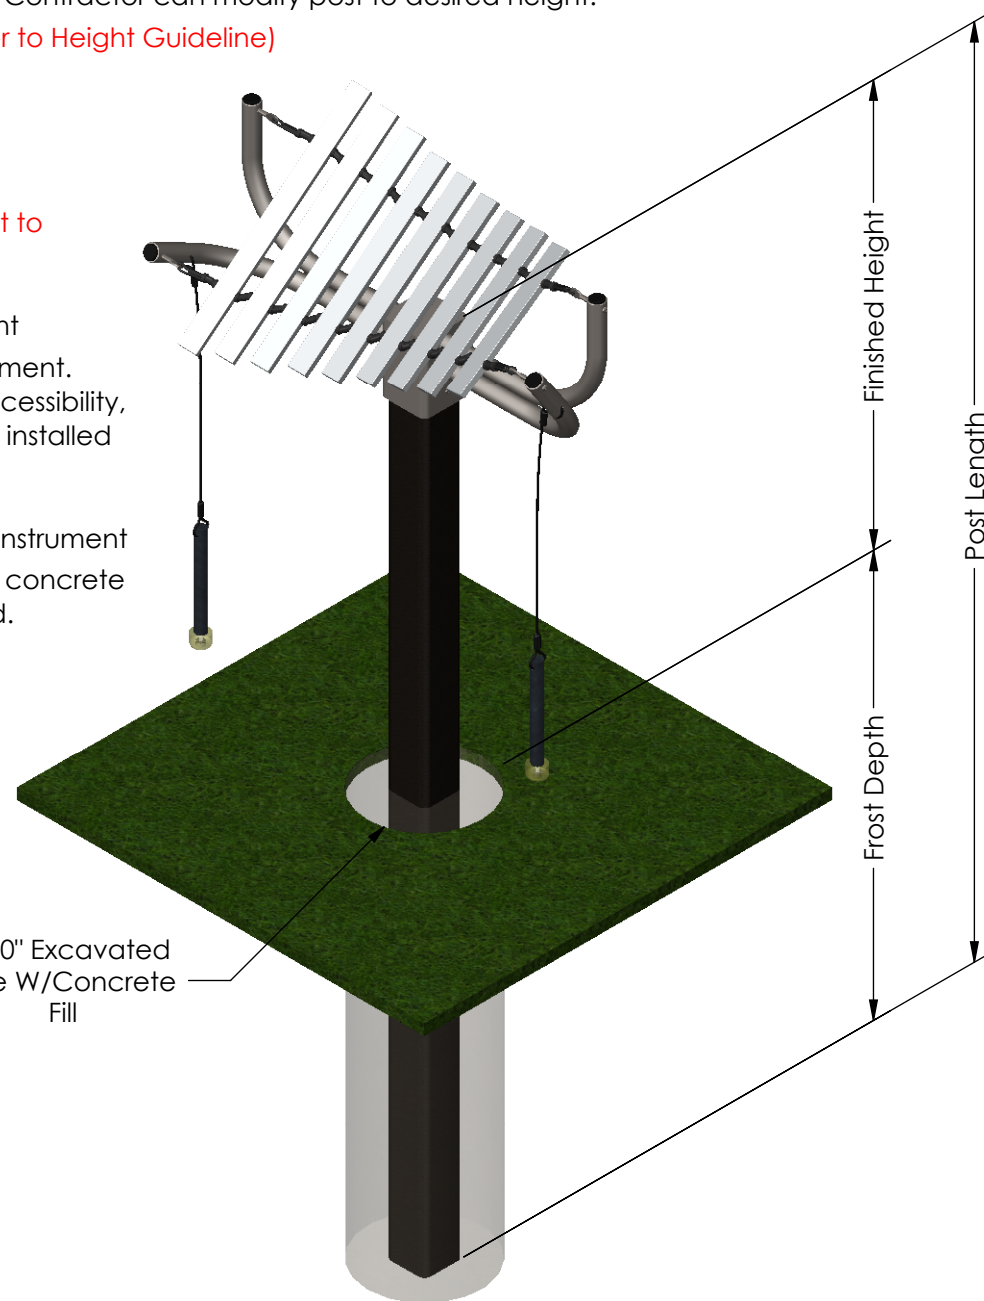

FINISHED HEIGHT GUIDELINE

Ages 3-5, 22"

Ages 5-7, 27"


Ages 7-11, 32"

Adult, 36"

Ø 10" Excavated
Hole W/Concrete
Fill

RECYCLED AND STEEL POST SURFACE MOUNT INSTALLATION PROCEDURES

- Step 1:** Determine installation location. Verify concrete footing is a minimum of 6" thick. If the concrete pad is at an angle, steel washers are required to act as shims. (Shims not provided)
- Step 2:** Stand the surface mount post upright onto the concrete pad. Mark the center of the holes on the surface mount plate. After you have made your marks, set aside the post in order to drill for anchor holes. With a hammer or rotary drill, drill through concrete at marked locations. Drill to a minimum depth of 4". (A 3/8" masonry drill bit will be needed)
- Step 3:** Place the surface mounted post back over the drilled out holes. Insert provided anchor bolts into aligned holes. Position anchor nut so that it is flush with the top of the bolt. Pound anchor bolts into the hole until the anchor washer is flush with the post base. Tighten anchor bolts until they are snug. Cover remaining bolt sections with provided plastic caps.
- Step 4:** Refer to sheet 5 for installation of instrument to post. (The Steel Surface Mount option does not require assembling the instrument to the post, as the post and instrument are one unit)
- Step 5:** Verify the correct placement, levelness, plumbness, and finished height of the instrument. Also check for sufficient clearance around the instrument. A 36" radius is recommended around the instrument for wheelchair accessibility, however this is not required for instrument function. Instrument may be installed next to a wall or in a variety of different configurations.

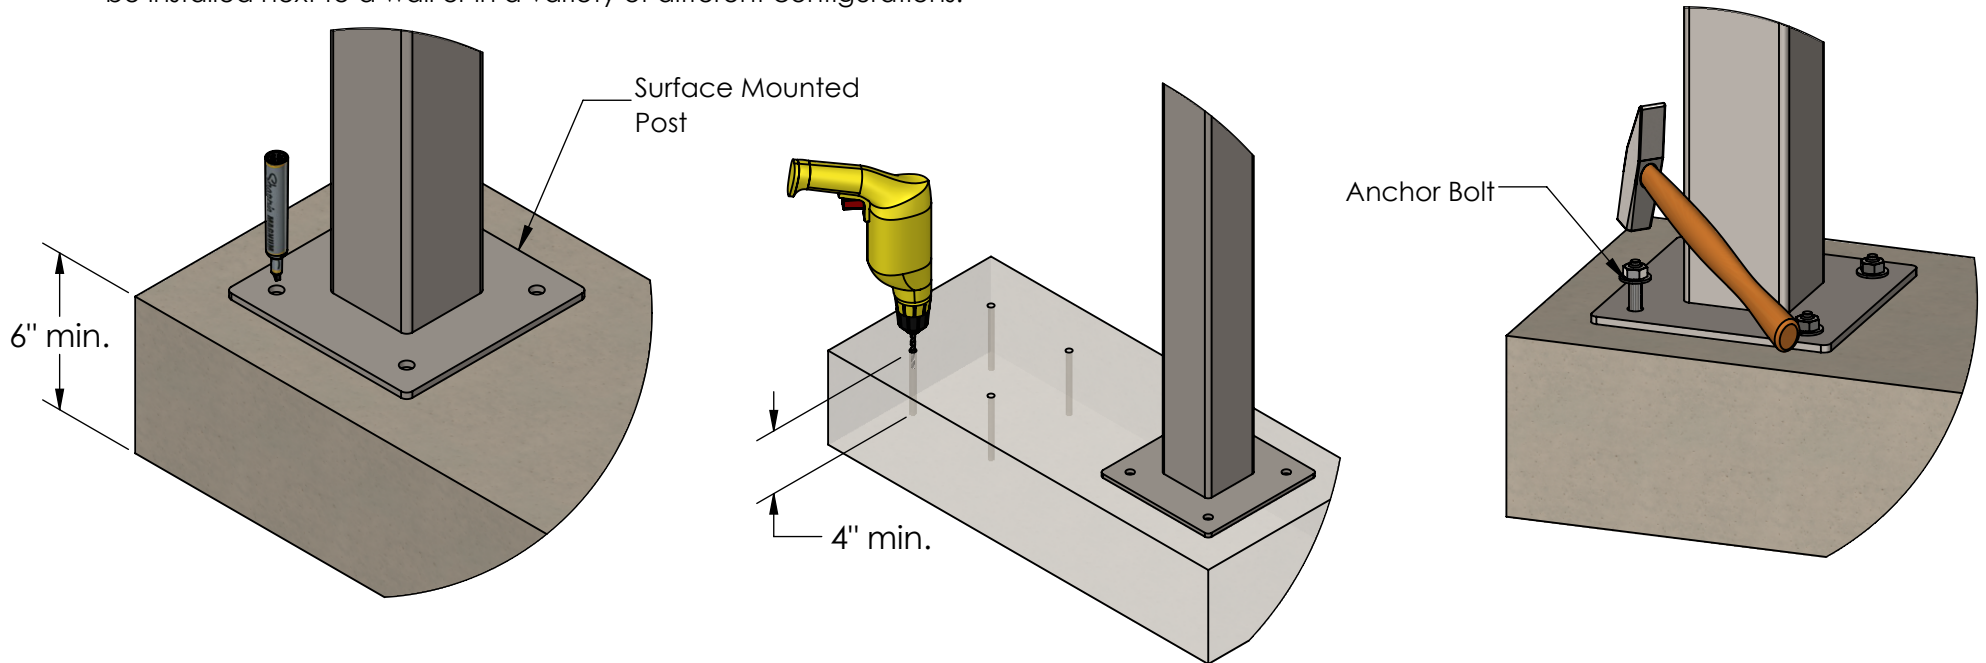

INSTRUMENT TO POST INSTALLATION PROCEDURES

- Step 1:** The Steel Post options do not require assembling the instrument to the post, as the post and instrument are one unit. Refer back to the final steps on the previous sheets if this applies to you. If mounting to a recycled post, follow the instructions below.
- Step 2:** With two people, situate the instrument onto the post. Predrill 5/32" pilot holes into the posts through the existing holes on the instrument. Fasten the instrument to the post with the provided 2" tamper-resistant screws and security driver.

