


Pendant Light Installation

Medium Base (PKW or PBW) Pendant

PACKAGE CONTENTS

Part	Description	Quantity
A	Mounting Strap	1
B	Mounting Screws	2
C	Wire Nut	3
D	Threaded Nipple *	1
E	Hexnut	1
F	Lock Washer	1
G	Collar Loop	1
H	Canopy *	1
I	Collar Ring	1
J	Chain *	1
K	Loop *	1
L	Socket Cup *	1
M	Socket Ring *	1
N	Glass Shade *	1
I	Metal Ring *	1

* Style and finish will vary by item.

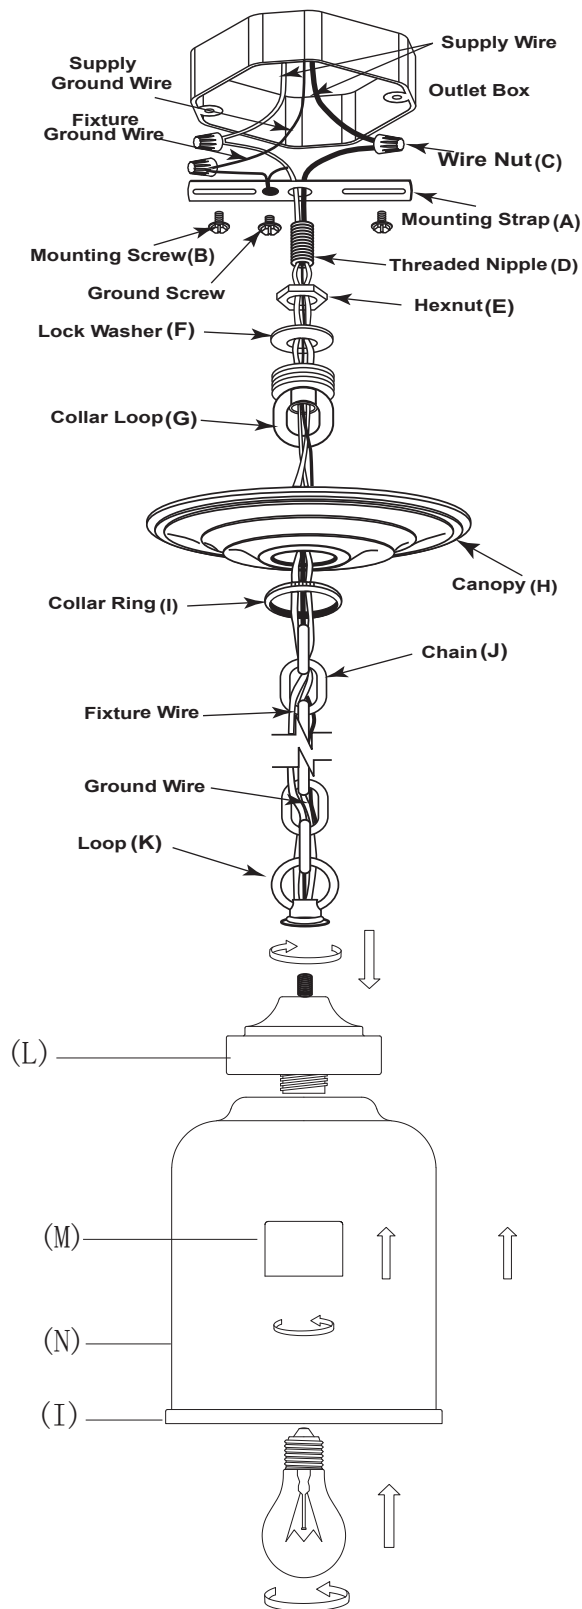

Questions, problems, missing parts? Before returning to your retailer, call our customer service department at 1-866-384-9400, 9 a.m.-5 p.m., EST, Monday-Friday. Include e-mail address if applicable.

IMPORTANT SAFETY INFORMATION

- TURN POWER OFF AT THE MAIN POWER PANEL OR FUSE BOX BEFORE INSTALLING OR REPLACING THE FIXTURE AND/OR WHEN REPLACING THE BULBS.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH ALL APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- If you are not familiar with electrical wiring, it is recommended that you secure services of a qualified electrician to assure that this installation meets local, state, and national codes
- The electrical system and the method of connecting this fixture to the system must be in accordance with local, state, and national electrical codes
- This fixture is to be connected to a 120-volt, 60Hz power source
- Connecting to a different power source may create a hazard and will void the warranty
- Do not use near or around flammable/combustible materials or liquids
- The bulb and unit can get hot during use. Turn off the power and allow the unit to cool down for at least 20 minutes before working on the unit.
- Never use a bulb with a higher wattage than the stated maximum wattage allowed for the fixture
- Using a higher wattage bulb may cause a fire hazard and/ or cause damage to the unit.
- If it becomes necessary to replace the glass, only use a tempered safety glass of equal thickness.
- Do not attempt to open the fixture housing. As there are no serviceable parts inside.
- All fixtures should be mounted to a ground junction box.

CEILING INSTALLATION & Fixture Assembly

1. Disconnect power at main electrical panel before installation.
2. Attach mounting strap(A) to outlet box using Mounting screws(B) provided with outlet box.
3. Screw threaded nipple(D) into collar loop(G) as far as it will go. Secure with lock washer(F) and hexnut(E).
4. Screw threaded nipple(E) into mounting strap(A) approximately 1/2 inch. Adjust height of collar loop(G) by temporarily holding canopy(H) in place against ceiling with collar loop(G) extending downward through hole in canopy.
5. Use pliers to open one end link of the chain(J) and attach to loop(K) on fixture. Close link. Thread fixture wire through chainlinks, weaving wire through every second link.
6. Pull ends of chain(J) and wires through collar ring(I) and canopy(J).
7. Use pliers to open the other end link of chain(J) and attach to collar loop(G). Close link.
8. Pass ends of fixture wires through center hole of collar loop(G), threaded nipple(D) and mounting strap(A).
9. Thread Loop(K) onto top of Socket Cup (L)
10. Position Shade (N) into socket cup (L) and then secure with Socket Ring (M).
11. After installation, thread bulb into socket. Use suitable wattage as indicated on label.

Wiring (see Fig A.)

1. Split the conductors of the fixture wire about 4 inches. Being careful not to expose any of the wire inside of the insulation.
2. Connect the fixture ground wire to the outlet box ground wire using wirenut(C)(not provided). Connect outlet box ground wire to mounting strap(A) with Green hex-head ground screw to tapped hole in mounting strap marked "GND".
3. Connect the half of the fixture wire that is white, marked or has a ribbed surface to the outlet box supply wire (WHITE). Connect the other half of the fixture wire that is black, unmarked, or has a smooth surface to the outlet box supply wire (BLACK or RED). Use wirenuts provided.
4. Spread the electrical splices so that the black wire is on one side of the outlet box and the white wire is on the other side.
5. Slide canopy(H) up into place against ceiling. Slide collar ring(I) up and thread onto collar loop(G) to secure canopy(H) in place.

NOTE: Make sure chain supports the weight of the light fixture and no weight is on either the supply or ground wires.

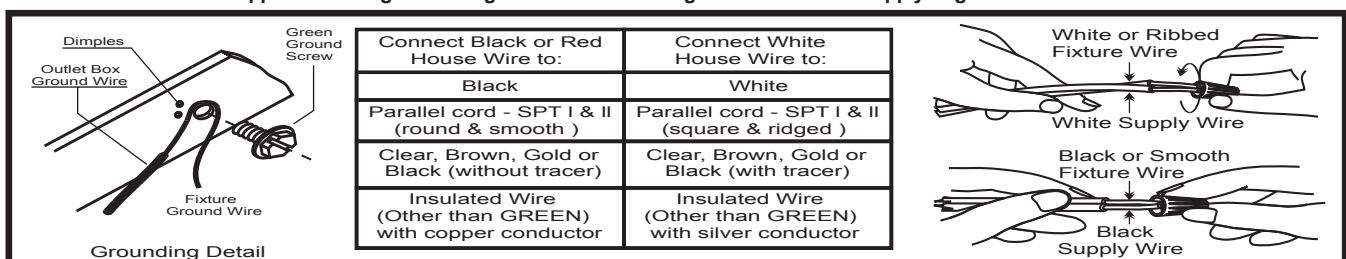


Fig. A

WARNING: For some length adjustments, it may be necessary to cut the cord. For this, turn off all power at the main power panel or fuse box then call a qualified electrician who can assure that this modification meets all safety and local regulations