

INSTALLATION INSTRUCTIONS


1. Raise door completely and disconnect power and the lifting arm of garage door opener.
2. Retain door by fastening "C" clamps under bottom rollers on each side.
3. **With tension completely off of cable**, thread the cable through the pulley. Remove using wrench and replace with new pulley.
4. Rethread cable through the pulley and retie loose end of cable from track support or attaching plate.
5. Slowly lower the door by hand to check that the cable is properly fed through the pulley.

WARNING!
IMPROPER INSTALLATION OR DOOR POSITION CAN
RESULT IN SERIOUS INJURY OR DEATH.

TOOLS NEEDED:

 Philips screwdriver

 Drill

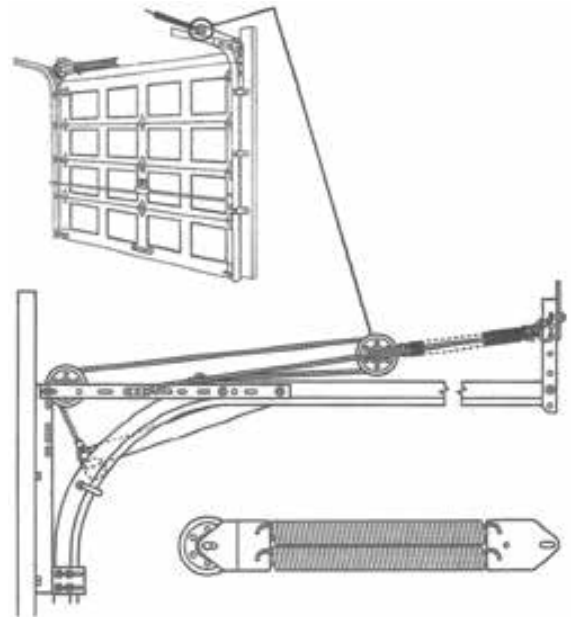

- Read and understand all instruction before you begin work.
- Wear safety goggles and gloves.
- Unplug power door opener and remove opener travel arm from door FIRST.
- Do not remove more than one part at a time.
- Do not attempt to raise or lower door without all components installed and securely tightened.
- Extension and torsion springs, along with attached hardware are under extreme tension at all times.
- All tension must be released from springs before any work is started.
- This hardware is intended for residential garage doors only.
- If you do not completely understand the installation instructions or are unsure whether the replacement part matches the part to be replaced, contact a professional installer.