
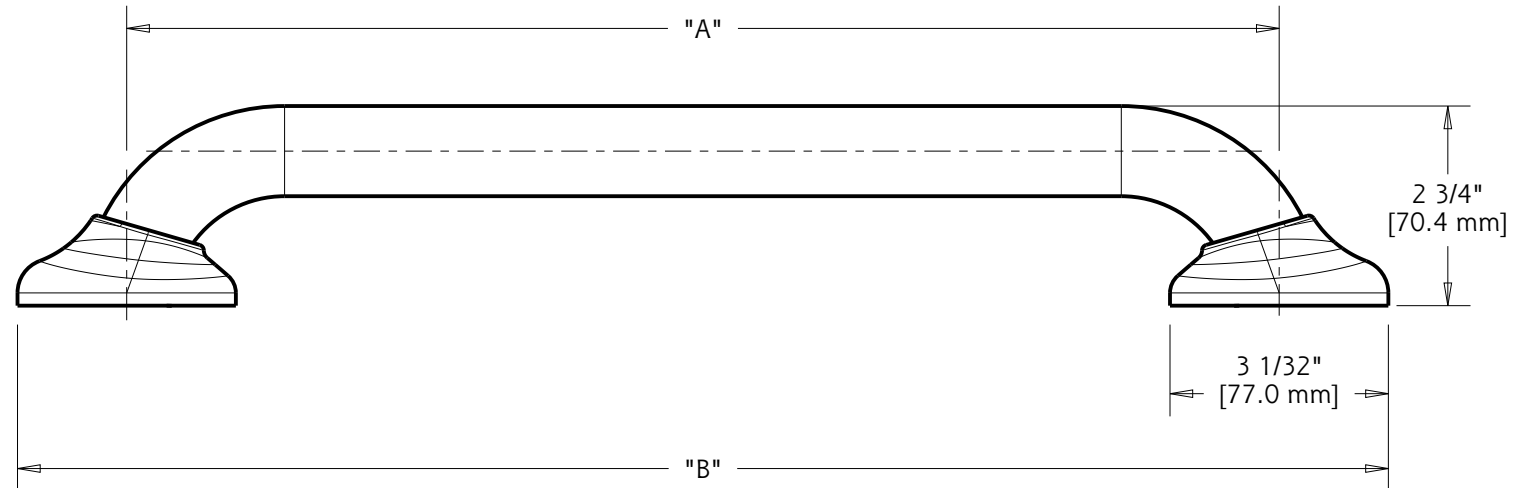


TECHNICAL DATA

Classic

ASSIST BAR ASSEMBLY

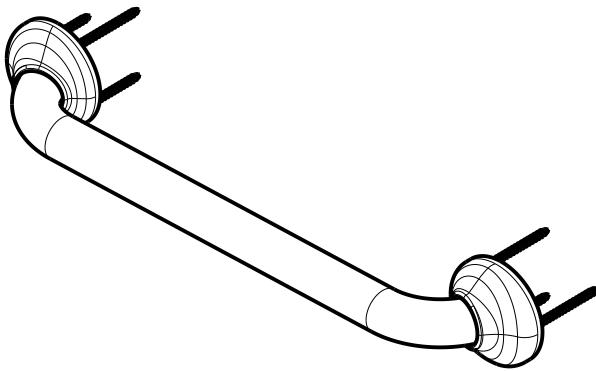

MATERIALS: Assist bar is constructed using 1 1/4" diameter 20 gauge stainless steel tubing. Decorative post is cast in zinc. Meets ADA and ANSI A117.1-2003 for form and load bearing requirements

INSTALLATION: Install Assist bar with 3 - #10 x 2-1/2" pan head stainless steel screws provided for each end wall flange.

OPTIONAL FASTENER INFORMATION:
Wall studs or Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, the following fasteners are suggested: Non-Stud Wall anchor.

SPECIFICATION: Surface mounted Assist Bar shall be model _____
(fill in model number) by Liberty Hardware Manufacturing Corporation.

LENGTH	A (Centre to Centre)	B (Total Length)
12"	12" (304.8 mm)	15 1/32" (381.8 mm)
16"	16" (406.4 mm)	19 1/32" (483.4 mm)
18"	18" (457.2 mm)	21 1/32" (534.2 mm)
24"	24" (609.6 mm)	27 1/32" (686.6 mm)
32"	32" (812.8 mm)	35 1/32" (889.8 mm)
36"	36" (914.4 mm)	39 1/32" (991.4 mm)
42"	42" (1066.8 mm)	45 1/32" (1143.8 mm)
48"	48" (1219.2 mm)	51 1/32" (1296.2 mm)