






Handle 1



Handle 2



Setting the handle stop

Turn off water supply.

As handle 1: Remove set screw, and then remove handle by pulling straight up.

As handle 2: Remove button and retaining screw, then remove handle by pulling straight up, loosen the set screw and take out the adapter.

Remove cap and bonnet counterclockwise.


Replace with new cartridge.

Slide the button to right side position (optional - see option 2).

Install the bonnet, cap and handle.

Turn on water supply.

Tools needed for installation: Adjustable wrench & Hex key

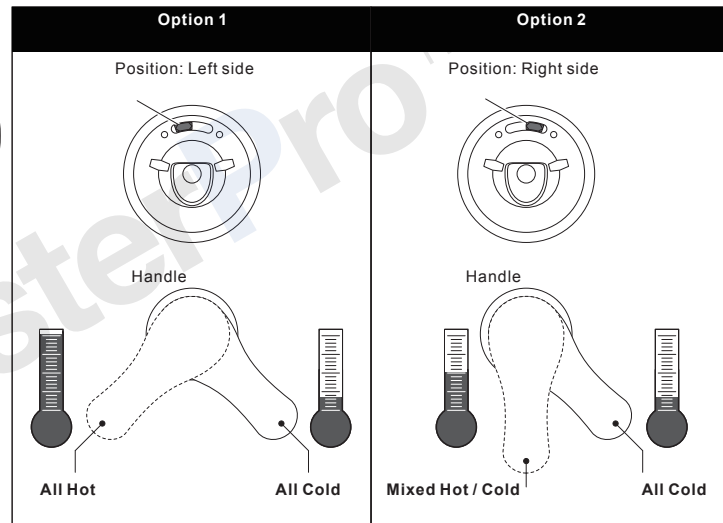

Note:

Option 1: The button is on the left side position.

It allows full handle motion (the full range between "all cold" to "all hot").

The button is set in option 1 at the factory.

Option 2: The button is on the right side position.

It allows half of the normal handle motion ("all cold" to "mixed hot/cold").

Setting the handle limit stop in option 2 may help to prevent scalding.