# FRIGIDAIRE.

# French Door Refrigerator

FFHD2250TS



### Signature Features

#### Adjustable Interior Storage

Over 100 ways to organize and customize your refrigerator.

## Multi Level LED Lighting

Corner-to-corner LED lighting throughout the refrigerator for better visibility.

# PureSource Ultra® II Water Filtration

Discover how our genuine filtration works to keep your water cleaner.
PureSource Ultra® II Water Filters remove 99.3% of lead and 99.9% of cysts from your household water.

#### Store-More™ Bins

Our gallon-size bins are designed to store more, so you can fit a gallon of milk.

#### 22.5 Cu. Ft. Counter-Depth

#### **Product Dimensions**

Height (Including Hinges & Rollers) 69-3/8"
Width (Doors) 36"
Depth (Including Door) 28-3/16"

#### More Easy-To-Use Features

Effortless™ Glide Crisper Drawers
Our humidity-controlled crisper drawers
can be configured any number of ways,
either side-by-side or stacked on top
of each other so you can organize your
refrigerator the way you want.

#### Store-More™ Shelves

More space to store your food with edge-to-edge shelves.

# Freezer Basket with Divider Deep freezer storage with adjustable

divider keeps food organized and accessible.

#### **Effortless™ Glide Freezer Drawers**

Drawers glide out smoothly and fully extend, giving you easy access to what's inside.

ENERGY STAR\* Sabbath Mode (Star-K\* Certified)



#### Available in:




# French Door Refrigerator

FFHD2250TS 22.5 Cu. Ft. Counter-Depth

Tall Curved
Stainless Steel
Grey
Yes/Yes
Hidden
2 Adjustable/Front
Yes
Top-Right Fresh Food Section
Ready-Select®
Left Door, Inside Edge
5
Quick Ice/No
Yes
Yes
Yes
Yes
Dual-Level LED
PureSource Ultra® II
PureSource Oltra® II
1
·
3 Edge to Edge
7.6-:116-4-8
3 SpillSafe®
Yes
1 Cool Zone™
I
2.01/2
2 Clear/2
1 Clear
2 White (1 per door)
2.01(11)
2 Clear (1 per door)
2 Clear (1 per door)
1
No/Yes
Yes
2 Effortless™ Glide
1 (Bottom Basket)
LED
Yes
Yes
Yes
22.5
22.5 15.7
15.7 6.8
15.7 6.8 Right Bottom Rear
15.7 6.8 Right Bottom Rear Left Bottom Rear
15.7 6.8 Right Bottom Rear Left Bottom Rear 115V/60Hz
15.7 6.8 Right Bottom Rear Left Bottom Rear 115V/60Hz 1.02
15.7 6.8 Right Bottom Rear Left Bottom Rear 115V/60Hz



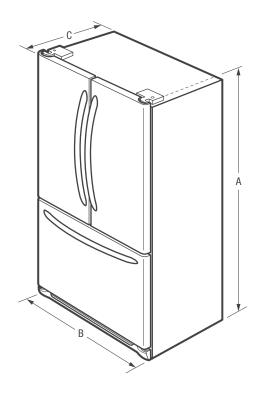

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.




Product Dimensions	
A-Height (Incl. Hinges & Rollers)	69-3/8"
B-Cabinet Width/Door Width	35-5/8"/36"
C-Depth (Incl. Door)	28-3/16"
Depth with Door Open 90°	42-9/16"
Depth with Drawer Fully Extended (Incl. Handle)	45-1/2"

"Built-In Look" Cutout Dimensions	
Height (Incl. Hinges and Rollers)	70-1/4"
Width	36"
Depth	25"

Accessories information available on the web at **frigidaire.com** 

# French Door Refrigerator

FFHD2250TS 22.5 Cu. Ft. Counter-Depth

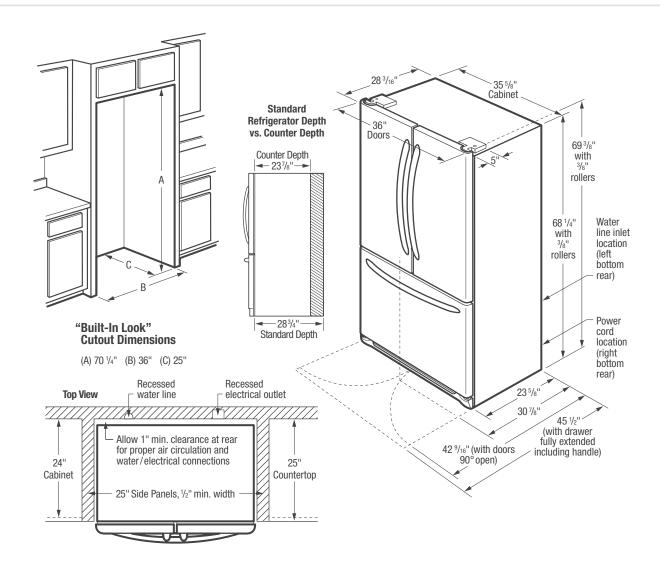

#### French Door Refrigerator Specifications

- Product Shipping Weight (approx.) 365 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- Voltage Rating 115V/60 Hz
- Connected Load (kW Rating)@115 Volts = 1.02 kW
- Amps @ 115 Volts = 8.5 Amps
- · Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer / crisper access and removal. (Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer / crisper access with restricted removal.)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.
- For proper ventilation, front grille MUST remain unobstructed.

- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation With available.
- Adjustable front rollers to assist with door alignment.

#### "Built-In Look" Specifications

- Minimum opening of 70-1/4" H  $\times$  36" W  $\times$  25" D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

