


# How To Assemble Your Bench (REV. 9/2016)


**TOOLS NEEDED:** Philips screwdriver, power drill optional

**CAUTION:** When assembling bench, **DO NOT** completely tighten the bolts and nuts until all the parts & holes are properly aligned.

## PARTS INCLUDED:

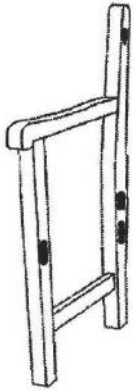

(B) Left Armrest

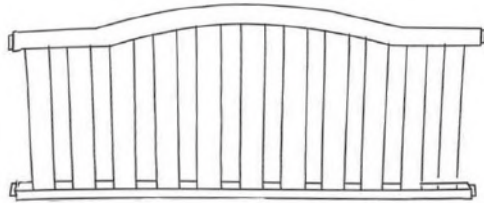

(C) Seat Back



(D) Seat



(A) Right Armrest




6 PCS  
Lag Bolts  
(6 x 60 m/m)



6 PCS  
Barrels


### Step 1:

Attach (B) Left Armrest to (D) Seat.

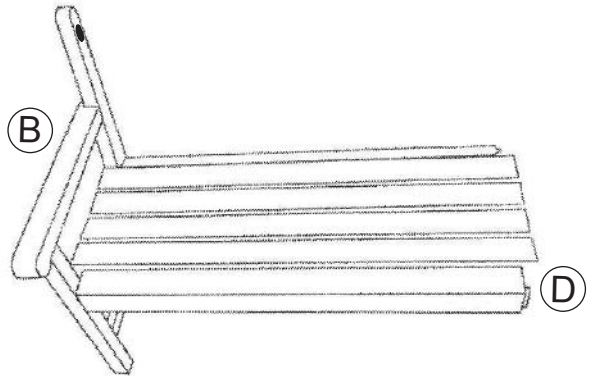

### Step 2:

Attach (B) Left Armrest to (C) Seat Back.

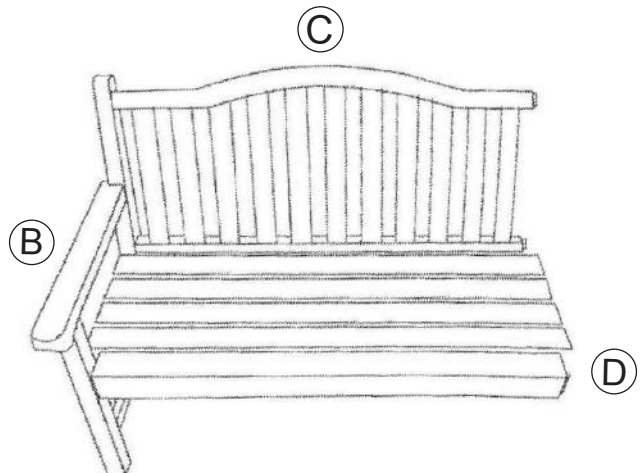

### Step 3:


Repeat same on the other side.

**Step 4:**

Place 2 barrels into holes found on the (C) Seat Back. Remove any debris from holes.

**Step 5:**

Use 1 PC Lag Bolt (6 x 60 m/m) to attach (A) Right Armrest into (C) Seat Back. Do not tighten. Repeat same on the other side.

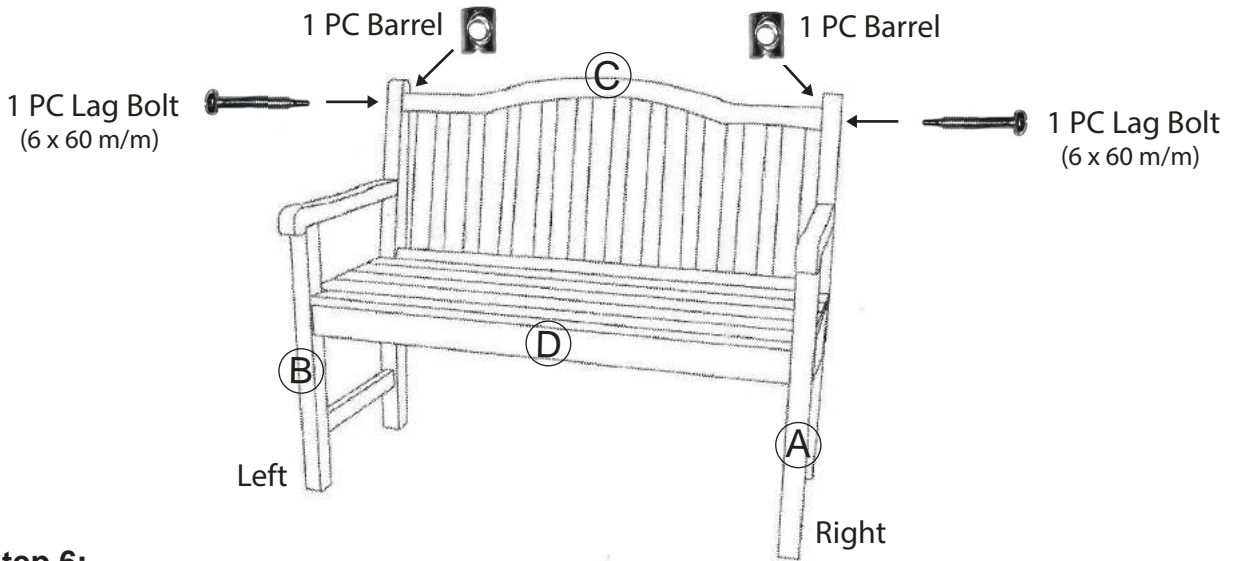

**Step 6:**

Place 4 barrels into holes found under the (D) Seat. Remove any debris from holes.

**Step 7:**

Use 2 PCS of Lag Bolts (6 x 60 m/m) to attach (A) Right Armrest into (D) Seat. Repeat same on the other side. Tighten all bolts into barrels.

